

**EMC TEST REPORT**

For

Guangdong Baolun Electronics Co., Ltd.

Conference System

Test Model: TS-0604M

Additional Model No.: Please Refer To Page 12

Prepared for : Guangdong Baolun Electronics Co., Ltd.  
Address : No.56 Nanlidong Road Shiqi Panyu Guangzhou

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Room 101, 201, Building A and Room 301, Building C,  
Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 16, 2023  
Number of tested samples : 2  
Samples number : A051223143-1, A051223143-2  
Date of Test : May 16, 2023 ~ May 23, 2023  
Date of Report : August 12, 2024





**EMC TEST REPORT**  
**EN 55032:2015/A11:2020**

Electromagnetic compatibility of multimedia equipment - Emission Requirements

**EN 55035:2017/A11:2020**

Electromagnetic compatibility of multimedia equipment – Immunity requirements

**Report Reference No.** ..... : **LCSA01084134E003**

**Date of Issue**..... : August 12, 2024

**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

**Address**..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

**Testing Location/ Procedure** ... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name**..... : **Guangdong Baolun Electronics Co., Ltd.**

**Address**..... : No.56 Nanlidong Road Shiqi Panyu Guangzhou

**Test Specification**

**Standard** ..... : EN 55032:2015/A11:2020  
EN IEC 61000-3-2:2019/A1:2021  
EN 61000-3-3: 2013/A2:2021  
EN 55035:2017/A11:2020

**Test Report Form No.** ..... : LCSEMC-1.0


**TRF Originator** ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

**Master TRF** ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description**..... : **Conference System**


**Trade Mark**..... : 

**Test Model** ..... : TS-0604M

**Ratings**..... : Please Refer to Page 9

**Result** ..... : **Positive**

**Compiled by:**



Hy Luo/ File administrators

**Supervised by:**



Cary Luo/ Technique principal

**Approved by:**



Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



# EMC -- TEST REPORT

Test Report No. : <b>LCSEA01084134E003</b>	<u>August 12, 2024</u> Date of issue
--	---

<b>Test Model</b> ..... : <b>TS-0604M</b>  EUT..... : Conference System
<b>Applicant</b> ..... : <b>Guangdong Baolun Electronics Co., Ltd.</b> Address..... : No.56 Nanlidong Road Shiqi Panyu Guangzhou Telephone..... : / Fax..... : /
<b>Manufacturer</b> ..... : <b>Guangdong Baolun Electronics Co., Ltd.</b> Address..... : No.56 Nanlidong Road Shiqi Panyu Guangzhou Telephone..... : / Fax..... : /
<b>Factory</b> ..... : <b>Guangdong Baolun Electronics Co., Ltd.</b> Address..... : No.56 Nanlidong Road Shiqi Panyu Guangzhou Telephone..... : / Fax..... : /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





## Revision History

Revision	Issue Date	Revision Content	Revised By
000	January 17, 2024	Initial Issue	/
001	May 10, 2024	Revised	Hy Luo
002	May 17, 2024	Revised	Hy Luo
003	August 12, 2024	Revised	ZI LIAO

**Remark:**

Declared by applicant, the Applicant has been changed in this report, and original test report become invalid.





# TABLE OF CONTENTS

Test Report Description	Page
<b>1. TEST STANDARDS</b> .....	<b>6</b>
<b>2.SUMMARY OF STANDARDS AND RESULTS</b> .....	<b>7</b>
2.1. DESCRIPTION OF STANDARDS AND RESULTS .....	7
2.2. DESCRIPTION OF PERFORMANCE CRITERIA .....	8
<b>3. GENERAL INFORMATION</b> .....	<b>9</b>
3.1. DESCRIPTION OF DEVICE (EUT) .....	9
3.2. SUPPORT EQUIPMENT LIST .....	10
3.3. DESCRIPTION OF TEST FACILITY .....	10
3.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	10
3.5. MEASUREMENT UNCERTAINTY .....	11
3.6 MODEL LIST .....	12
<b>4. MEASURING DEVICES AND TEST EQUIPMENT</b> .....	<b>13</b>
<b>5. TEST RESULTS</b> .....	<b>15</b>
5.1. POWER LINE CONDUCTED EMISSION MEASUREMENT .....	15
5.2. RADIATED EMISSION MEASUREMENT .....	17
5.3. HARMONIC CURRENT EMISSION MEASUREMENT .....	19
5.4. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT .....	20
5.5. ELECTROSTATIC DISCHARGE IMMUNITY TEST .....	21
5.6. RF FIELD STRENGTH SUSCEPTIBILITY TEST .....	23
5.7. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST .....	25
5.8. SURGE IMMUNITY TEST .....	27
5.9. INJECTED CURRENTS SUSCEPTIBILITY TEST .....	29
5.10. MAGNETIC FIELD SUSCEPTIBILITY TEST .....	31
5.11. VOLTAGE DIPS AND INTERRUPTIONS TEST .....	32
<b>ANNEX A</b> .....	<b>33</b>
<b>ANNEX B</b> .....	<b>37</b>
<b>ANNEX C</b> .....	<b>52</b>





## 1. TEST STANDARDS

The tests were performed according to following standards:

EN 55032:2015/A11:2020 Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035:2017/A11:2020 Electromagnetic compatibility of multimedia equipment – Immunity requirements

EN IEC 61000-3-2:2019/A1:2021 Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase)

EN 61000-3-3: 2013/A2:2021 Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16$  A per phase and not subject to conditional connection



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 2.SUMMARY OF STANDARDS AND RESULTS

### 2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

Emission (EN 55032:2015/A11:2020)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55032:2015/A11:2020	Class B	PASS
Conducted disturbance at telecommunication port	EN 55032:2015/A11:2020	Class B	N/A
Radiated disturbance	EN 55032:2015/A11:2020	Class B	PASS
Harmonic current emissions	EN IEC 61000-3-2:2019/A1:2021	Class A	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013/A2:2021	-----	PASS
Immunity (EN 55035:2017/A11:2020)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2:2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN IEC 61000-4-3:2020	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4:2012	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5:2014/A1:2017	B	PASS
Surge (Telecommunication ports)		B	N/A
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6:2014/A1:2015	A	PASS
Power frequency magnetic field	EN 61000-4-8:2010	A	N/A
Voltage dips, >95% reduction	EN IEC 61000-4-11:2020/AC: 2020	B	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS
***Note: N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode	Working	Record



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## 2.2. Description of Performance Criteria

### General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;

#### 2.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### 2.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### 2.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 3. GENERAL INFORMATION

#### 3.1. Description of Device (EUT)

EUT : Conference System

Trade Mark : 

Test Model : TS-0604M

Additional Model No. : See model list on page 12 for details

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

Power Supply : Input: 220-240V~, 50/60Hz, 340W max.

Highest internal frequency :  $F_x \leq 108\text{MHz}$

Highest internal frequency (Fx)	Highest measured frequency
$F_x \leq 108\text{ MHz}$ $108\text{ MHz} < F_x \leq 500\text{ MHz}$ $500\text{ MHz} < F_x \leq 1\text{ GHz}$ $F_x > 1\text{ GHz}$	1 GHz 2 GHz 5 GHz 5 × Fx up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, Fx is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies. NOTE 2 Fx is defined in EN 55032 Section 3.1.19. Where Fx is unknown, the radiated emission measurements shall be performed up to 6 GHz	





### 3.2. Support Equipment List

Name	Manufacturers	M/N	S/N
--	--	--	--

### 3.3. Description of Test Facility

NVLAP Accreditation Code is 600167-0.  
FCC Designation Number is CN5024.  
CAB identifier is CN0071.  
CNAS Registration Number is L4595.

### 3.4. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.





### 3.5. Measurement Uncertainty

Test	Parameters	Expanded uncertainty ( $U_{lab}$ )	Expanded uncertainty ( $U_{cispr}$ )
Conducted Emission	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	$\pm 2.63$ dB $\pm 2.35$ dB	$\pm 3.8$ dB $\pm 3.4$ dB
Power Disturbance	Level accuracy (30MHz to 300MHz)	$\pm 2.90$ dB	$\pm 4.5$ dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	$\pm 3.60$ dB	$\pm 3.3$ dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	$\pm 3.68$ dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	$\pm 3.48$ dB	$\pm 5.3$ dB
Radiated Emission	Level accuracy (above 1000MHz)	$\pm 3.90$ dB	$\pm 5.2$ dB
Mains Harmonic	Voltage	$\pm 0.510\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 0.510\%$	N/A
EMF	/	$\pm 21.59\%$	N/A

1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.  
2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.





### 3.6 Model List

TS-0604M, TS-0200M, TS-W111, TS-W209, TS-W205, TS-0370HY, TH-0512, TH-0700HC, TH-0501, TH-0501A, TH-0510, TH-0511, TH-0595, TH-10L, TH-0521, TH-0522, TH-0580, TH-0591A, H-0700HY, TH-0734, TH-0597, TH-0590M, TH-0591, TH-0700HS, TH-0733, TH-0900, TH-0735, TH-0732, TH-0700H, TH-0802, TH-0802A, TH-0824, TH-0802ME, TH-0791, TH-0792, TH-0804A, TH-0805, TH-0805A, TH-0803, TH-0801, TH-0793, TH-0807A, TH-0808, TH-0808A, TH-0806, TH-0803A, TH-0801A, TH-0822A, TH-0823, TH-0700HD, TH-0809, TH-0806A, TH-0804, TH-0904, TH-0903, TS-0695, TH-0821, TH-0809A, TH-0807, TH-15T, TH-13, TS-05L, TH-0901, TH-0821A, TH-0822, TH-2, TH-8DH, TS-8C, TH-20L, TH-0902, TH-0900R, TH-9000S, TR-0630W, TH-0802M, TH-9000M, TH-50L, TH-100L, TR-0600W, TR-0849, TH-0500M, TR-0600C, TR-0840, TR-0840SW1, TR-840SW2, TS-0200M-32, TH-0520, TR-0600M, TR-0846A, TR-0842, TR-0845, TS-0200MX, TS-0604ME, TR-0630C, TS-0200MC-64, TS-0200MC, TS-0203A-64, TS-0310, TS-0670HS, TR-0630D, TS-0200ME, TS-0370HD, TS-6200B, TS-W100, TH-0596, TR-0630P, TS-0370HS, TS-0203-64, TS-0206A-32, TS-0370H-8, TS-0200ML, TR-0830B, TS-0308A, TS-0309, TS-0309A, TS-02L, TS-0310A, TR-0840A, TS-0203A-32, TS-0206-32, TS-0205DA, TS-0565, TS-02RD, TR-0846, TS-0204A-64, TS-0205D, TF-0100W, TS-0602A, TS-0625A, TS-0200M-64, TS-0206A, TS-0211, TS-0240, TS-0623A, TS-20D, TS-0200MM, TS-0306EA, TS-0210F, TS-0564, TS-0625, TS-P840, TS-W305A, TS-0304A, TS-0308, TS-05T, TS-0670HD, TS-0200MB, TS-0203-32, TS-0306E, TS-0221, TS-0623, TS-0670HY, TH-0820, TS-0204-32, TS-0560M, TS-0250, TS-0624A, TS-0670HY-64, TH-0823A, TS-0204-64, TS-0566, TS-02T, TS-0628A, TS-0682, TS-0306A, TS-0206, TS-0604MB, TS-0561, TS-0670HY-32, TS-0698, TS-0562, TS-0210, TS-0605M, TS-W304, TS-0681, TS-205, TS-235, TS-0212B, TS-0621A, TS-0621T, TS-0692, TS-231, TS-8202, TS-0223A, TS-0626A, TS-0624, TS-0811, TS-7C, TS-8403A, TS-0230A, TS-0690, TS-0628, TS-100L, TS-8201, TR-0830, TS-0303A, TS-20L, TS-0670H, TS-8308, TS-8201A, TR-0841, TS-0563, TS-830, TS-0670HD-16, TS-8404B, TS-8202A, TS-0200MC-32, TS-05D, TS-8403G, TS-0670HD-8, TS-8C120, TS-8409, TS-0206A-64, TS-0621, TS-8T, TS-0691, TS-8K, TS-8410, TS-0204A-32, TS-0626, TS-920, TS-0699, TS-930, TS-8430, TS-0206-64, TS-0627A, TS-F0212AS, TS-50L, TS-0303E, TS-8G, TS-8304B1, TS-0670HC, TS-0306, TS-548MV, TS-0305GA, TS-F101T, TS-8304B2, TS-0693, TS-F173T, TS-8210, TS-F184KT, TS-F133T, TS-9110, TS-10L, TS-F185MT, TS-8304A, TS-FE185T, TS-F156MT, TS-W304A, TS-50D, TS-F185T, TS-835, TS-0300MA, TS-F156T, TS-0250A, TS-8300, TS-F215T, TS-8404A, TS-0305DA, TS-F173MT, TS-0300M, TS-8402, TS-FC156MT, TS-8405, TS-0300MX, TS-FE173MT, TS-0303, TS-8403, TS-FC156T, TS-8407, TS-0305G, TS-FE173T, TS-0300MD, TS-8403B, TS-FE156MT, TS-8413, TS-0303EA, TS-P460, TS-0305D, TS-8411, TS-FZ156T, TS-8420, TS-FZ215T, TS-W109, TS-0202DA, TS-8412, TS-FZK156T, TS-8S, TS-FZK173T, TS-116, TS-F0212AB, TS-8M, TS-0236D, TS-0236E, TS-FZK215T, TS-W180, TS-0202D, TS-FE185MT, TS-0305, TS-F1107T, TS-P440, TS-0300ME, TS-W104, TS-P880C, TS-W113, TS-W112, TS-W150, TS-0305A, TS-W203, TS-8200, TS-6200M, TS-8200B, TS-6200A, TS-8200A, TS-6221M, TF-8830, TF-HY36170, TF-M03300, TF-H36178, TS-0370HC, T-A1.8, TS-0300M (JW), TS-0204, TS-W101S, TS-0303B, TS-0603, TS-0220MD, TR-0840B, TS-0602S, TS-W301D, TS-0220MF, TS-0214, TR-0845B, TR-0845W, TR-0846B, TR-0846W, TR-0848, TR-0847B, TS-9104UHM, TS-9416UHM, TS-0370H-16, TZ-36210, TZ-8230, TZ-H36270Y, TZ-0400M, TP-05304B2, TP-05300B, TP-05308, TP-25300M, TP-310D, TP-350D, TF-93100, TF-93100R1, TF-93104, TF-93108, TC-W804IB1, TF-B193104, TC-D300M, TF-M03300, TC-600T, TF-T05100, TZ-07200T, TV-\*\*\*\*\*, TF-\*\*\*\*\*, TZ-\*\*\*\*\*, TP-\*\*\*\*\*, PM-\*\*\*\*\*, TS-\*\*\*\*\*, T-\*\*\*\*\* (\*can represent the numbers 0-9, letters A-Z, a-z, symbols or blank space, representing different marketing areas; Does not affect product safety and lectromagnetic compatibility)



**4. MEASURING DEVICES AND TEST EQUIPMENT**

LINE CONDUCTED EMISSION						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	Farad	EZ	/	N/A	N/A
2	EMI Test Receiver	R&S	ESR3	102312	2023-02-25	2024-02-24
3	Artificial Mains	R&S	ENV216	101288	2022-06-16	2023-06-15
4	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2022-08-17	2023-08-16

RADIATED DISTURBANCE						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Software	AUDIX	E3	/	N/A	N/A
2	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
3	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
4	EMI Test Receiver	R&S	ESR3	102311	2022-08-17	2023-08-16
5	Broadband Preamplifier	/	BP-01M18G	P190501	2022-06-16	2023-06-15

VOLTAGE FLUCTUATION AND FLICKER/HARMONIC CURRENT EMISSIONS						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	HARMONICS&FLICKER MEASUREMENT SYSTEM	EVERFINE	HFM-3000	P630850CD1411116	2023-02-25	2024-02-24
2	HARMONICS&FLICKER TESTING POWER SOURCE	EVERFINE	HFS-4000	P624486CD1411124	2023-02-25	2024-02-24

ELECTROSTATIC DISCHARGE						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	SCHLODER	SESD 230	604035	2022-07-18	2023-07-17

RF ELECTROMAGNETIC FIELD)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXG Vector Signal Generator	Agilent	E4438C	MY42081396(6G)	2022-06-16	2023-06-15
2	RF POWER AMPLIFIER	SKET	HAP_0306G-50W	/	2022-06-16	2023-06-15
3	RF POWER AMPLIFIER	OPHIR	5225R	1052	2022-06-16	2023-06-15
4	RF POWER AMPLIFIER	OPHIR	5273F	1019	2022-06-16	2023-06-15
5	Stacked Broadband Log Periodic Antenna	SCHWARZBEC K	STLP 9128	9128ES-145	NCR	NCR
6	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBEC K	STLP 9149	9149-484	NCR	NCR
7	RS Electric field probe	narda	EP601	611WX80208	2022-06-16	2023-06-15

Note: NCR means no calibration requirement



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**ELECTRICAL FAST TRANSIENT IMMUNITY**

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2022-08-17	2023-08-16

**SURGES, LINE TO LINE AND LINE TO GROUND**

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500-M4	0101-34	2022-08-17	2023-08-16

**RF COMMON MODE**

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Simulator	FRANKONIA	CIT-10/75	A126A1195	2022-08-17	2023-08-16
2	CDN	FRANKONIA	CDN-M2+M3	A2210177	2022-06-16	2023-06-15
3	6dB Attenuator	FRANKONIA	DAM25W	1172040	2022-06-16	2023-06-15

**VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2022-06-16	2023-06-15



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

## 5. TEST RESULTS

### 5.1. POWER LINE CONDUCTED EMISSION MEASUREMENT

#### 5.1.1. Block Diagram of Test Setup

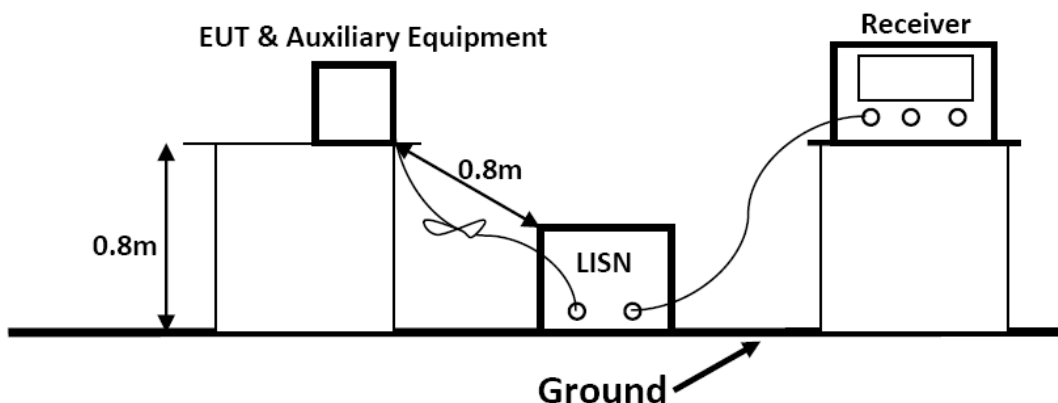

#### 5.1.2. Test Standard

EN 55032:2015/A11:2020 Class B

Power Line Conducted Emission Limits (Class B)		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

#### 5.1.3. EUT Configuration on Test

The following equipments are installed on Power Line Conducted Emission Measurement to meet the EN 55032 requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

#### 5.1.4. Operating Condition of EUT

- 5.1.4.1. Setup the EUT as shown on Section 5.1.1
- 5.1.4.2. Turn on the power of all equipments.
- 5.1.4.3. Let the EUT work in measuring mode(1) and measure it.





### 5.1.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided 50-ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55032 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated.

### 5.1.6. Test Results

**PASS.**



Refer to attached Annex B.1





## 5.2. RADIATED EMISSION MEASUREMENT

### 5.2.1. Block Diagram of Test Setup

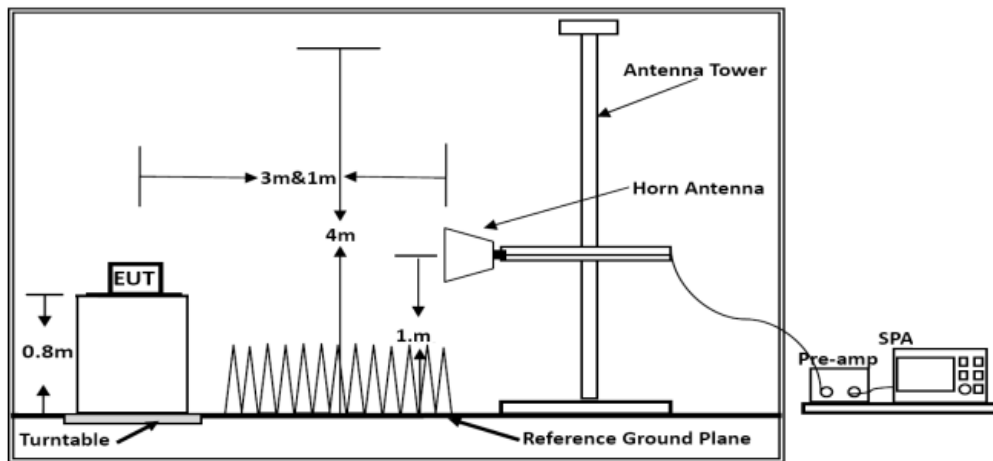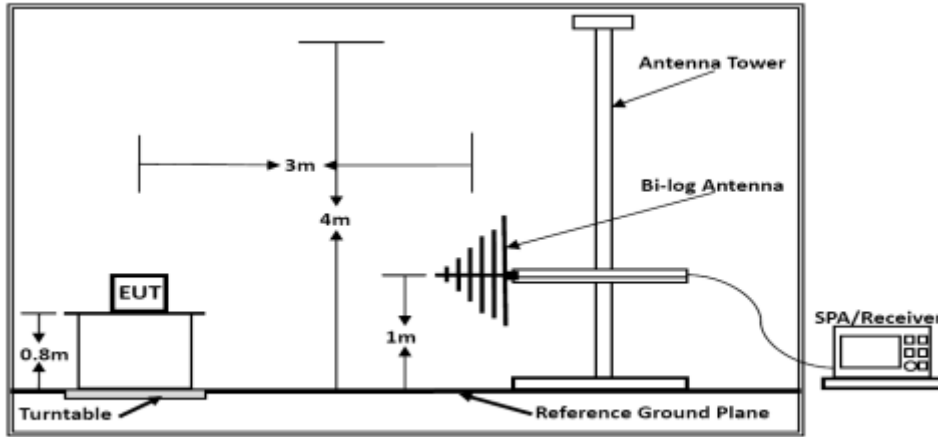



### 5.2.2. Test Standard

EN 55032:2015/A11:2020 Class B

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Limits for Radiated Emission Below 1GHz			
Frequency (MHz)	Distance (Meters)	Field Strengths Limit (dB $\mu$ V/m)	
30 ~ 230	3	40	
230 ~ 1000	3	47	
***Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.			
Limits for Radiated Emission Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

### 5.2.3. EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission measurement.

### 5.2.4. Operating Condition of EUT

5.2.4.1. Turn on the power.

5.2.4.2. Let the EUT work in the test mode(1) and measure it.

### 5.2.5. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter high above the ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. By-log antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

The bandwidth of the EMI test receiver is set at RBW/VBW=120kHz/300kHz and the frequency range from 30MHz to 1000MHz is checked.

The bandwidth of the Spectrum analyzer is set at RBW/VBW=1MHz/3MHz and the frequency range from 1GHz to the frequency which about 5th carrier harmonic or 6GHz is checked.

### 5.2.6. Test Results

**PASS.**

Refer to attached Annex B.2



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 5.3. HARMONIC CURRENT EMISSION MEASUREMENT

#### 5.3.1. Block Diagram of Test Setup

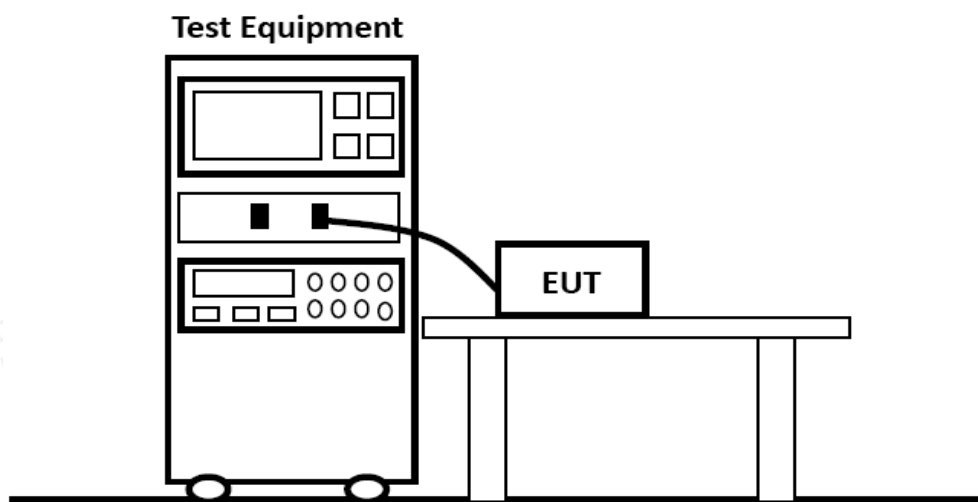

#### 5.3.2. Test Standard

EN IEC 61000-3-2:2019/A1:2021

#### 5.3.3. Operating Condition of EUT

Same as Section 5.2.4, except the test setup replaced as Section 5.3.1.

#### 5.3.4. Test Results


Refer to attached Annex B.3





## 5.4. VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

### 5.4.1. Block Diagram of Test Setup

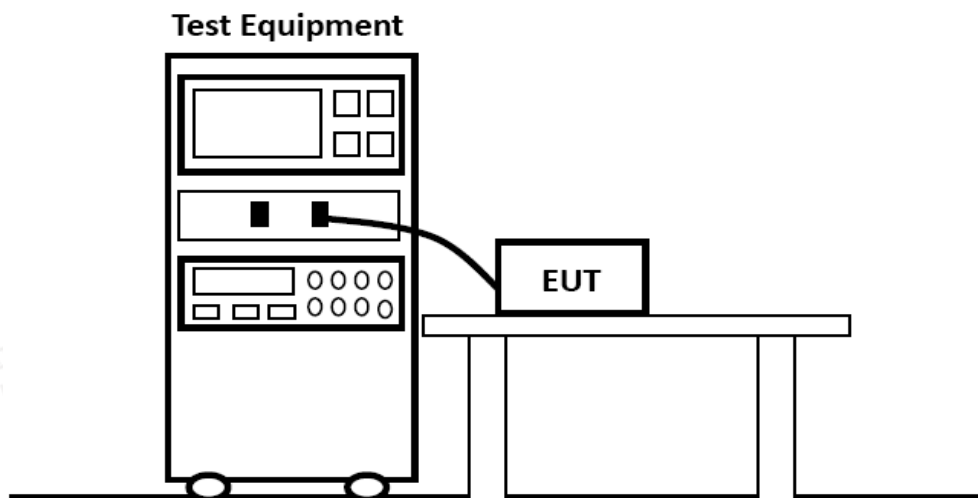

### 5.4.2. Test Standard

EN 61000-3-3: 2013/A2:2021

### 5.4.3. Operating Condition of EUT

Same as Section 5.2.4, except the test setup replaced as Section 5.4.1.

### 5.4.4. Test Results


**PASS.**

Refer to attached Annex B.4



## 5.5. ELECTROSTATIC DISCHARGE IMMUNITY TEST

### 5.5.1. Block Diagram of Test Setup

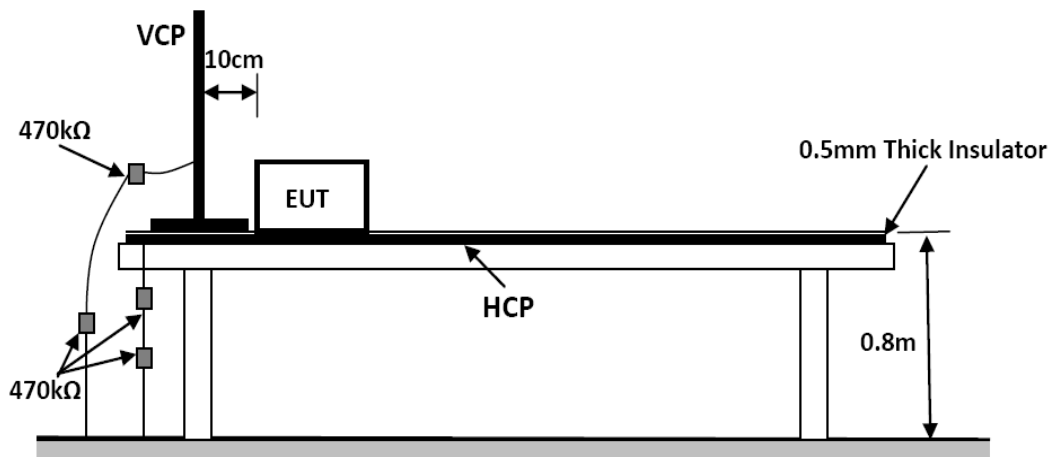

### 5.5.2. Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-2:2009, Severity Level: 3 / Air Discharge:  $\pm 8\text{KV}$ , Level: 2 / Contact Discharge:  $\pm 4\text{KV}$ )

### 5.5.3. Severity Levels and Performance Criterion

#### 5.5.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1	$\pm 2$	$\pm 2$
2	$\pm 4$	$\pm 4$
3	$\pm 6$	$\pm 8$
4	$\pm 8$	$\pm 15$
X	Special	Special

#### 5.5.3.2. Performance Criterion

Performance Criterion: B

### 5.5.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.5.1.

### 5.5.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 5.1.4. Except the test set up replaced by Section 5.5.1.





### 5.5.6. Test Procedure

#### 5.2.6.1. Air Discharge

This test is done on a non-conductive surfaces. The round discharge tip of the Electrostatic Discharge simulator shall be approached as fast as possible then to touch the EUT. After each discharge, the simulator shall be removed from the EUT. The simulator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

#### 5.2.6.2. Contact Discharge

All the procedure shall be same as air discharge, except using the acute discharge tip. The top end of the Electrostatic Discharge simulator is touch the EUT all the time when the simulator is re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.

#### 5.2.6.3. Indirect Discharge For Horizontal Coupling Plane

The vertical coupling plane(VCP) is placed 0.1m away from EUT. The top end of Electrostatic Discharge simulator should aim at the center of one border of the VCP for at least 25 times discharge.

#### 5.2.6.4. Indirect Discharge For Vertical Coupling Plane

The top end of Electrostatic Discharge simulator should place at the point 0.1m away from EUT on the horizontal coupling plane(HCP). At least 25 times discharge should be done for every pre-selected point around EUT.

Record any performance degradation of the EUT during the test and judge the test result according to ce criterion.

### 5.5.7. Test Results


**PASS.**

Refer to attached Annex B.5



## 5.6. RF FIELD STRENGTH SUSCEPTIBILITY TEST

### 5.6.1. Block Diagram of Test Setup

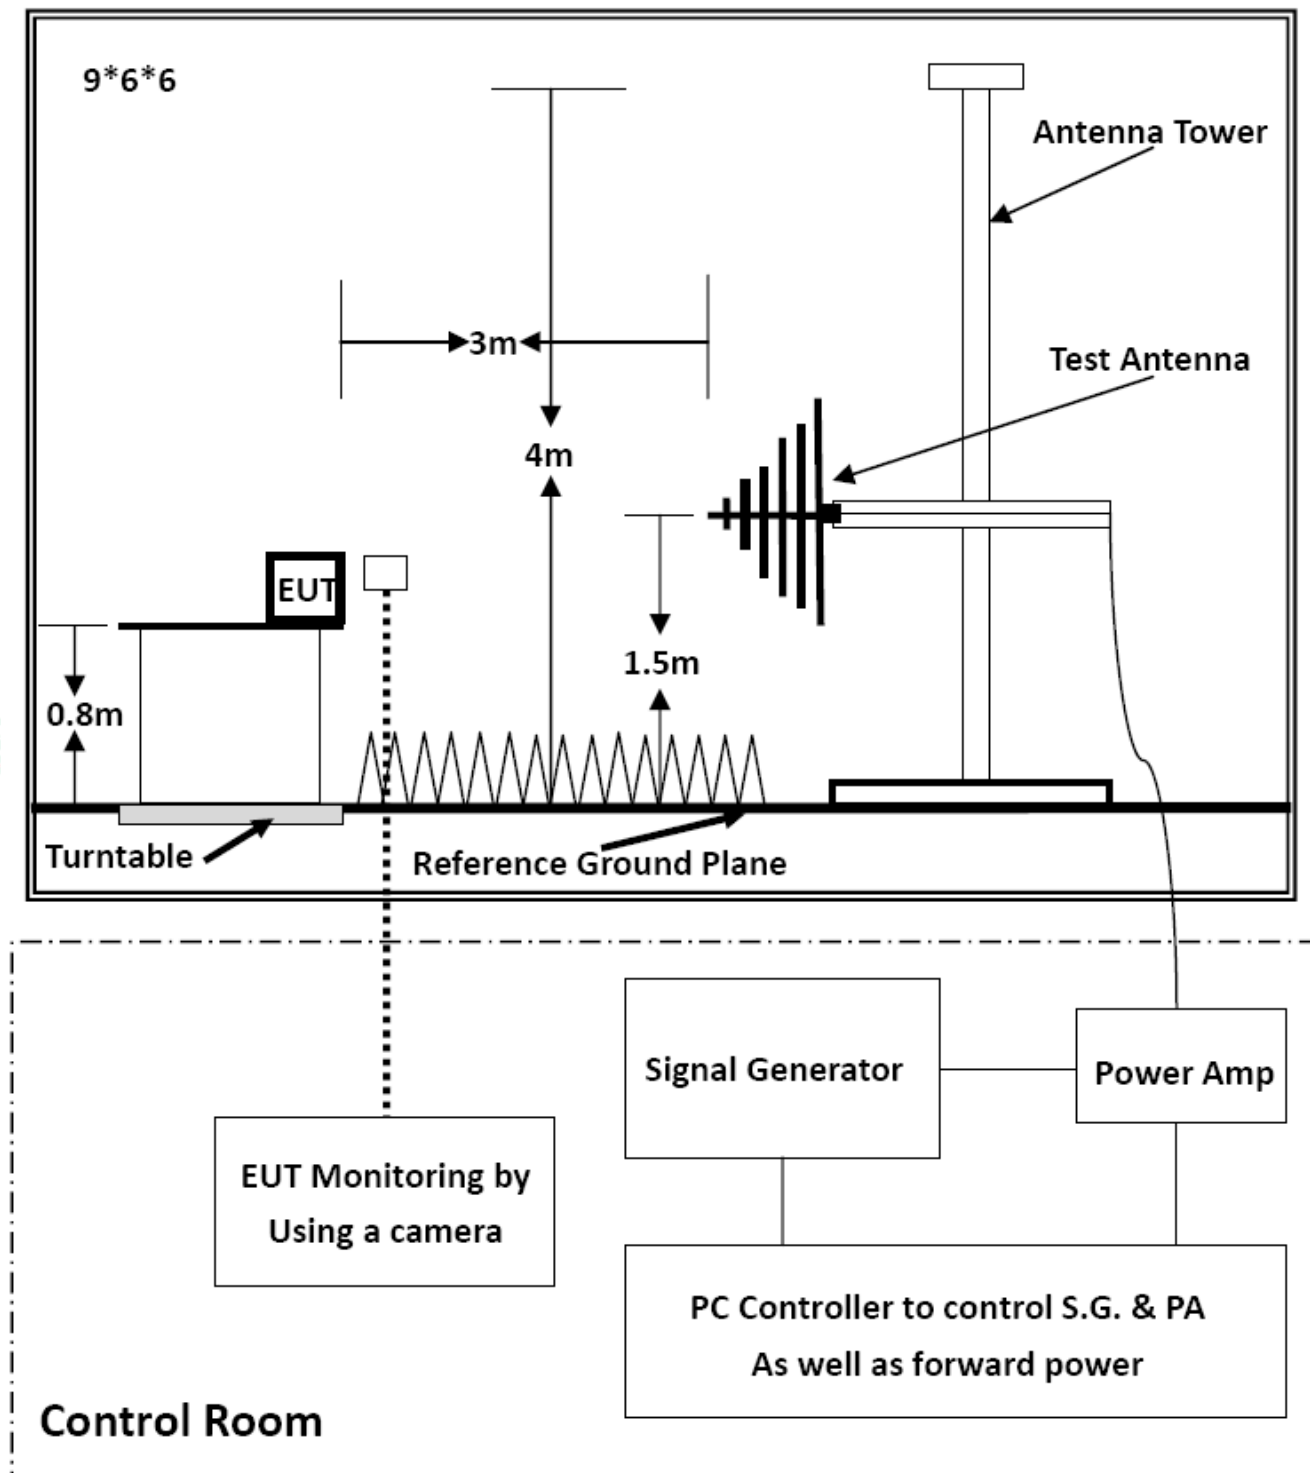



### 5.6.2. Test Standard

EN 55035:2017/A11:2020 (EN IEC 61000-4-3:2020 Severity Level: 2, 3V/m)

### 5.6.3. Severity Levels and Performance Criterion

#### 5.6.3.1. Severity level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	1

#### 5.6.3.2. Performance Criterion

Performance Criterion: A

### 5.6.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.6.1.

### 5.6.5. Operating Condition of EUT

Same as radiated emission measurement, which is listed in Section 5.2.4, except the test setup replaced as Section 5.6.1.

### 5.6.6. Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD Recording is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Test Frequency Range (swept test)	80-1000MHz
Test Frequency (spot test)	1800MHz, 2600MHz, 3500MHz, 5000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.

### 5.6.7. Test Results

**PASS.**

Refer to attached Annex B.6



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 5.7. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

#### 5.7.1. Block Diagram of Test Setup

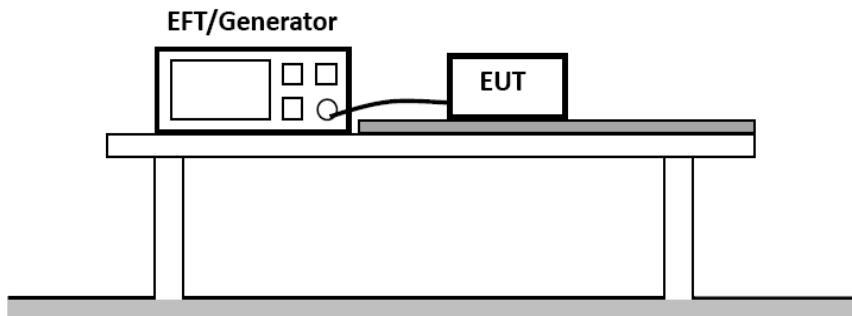

#### 5.7.2. Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-4:2012, Severity Level, Level 2: 1KV)

#### 5.7.3. Severity Levels and Performance Criterion

##### 5.7.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 KV	0.25 KV
2	1 KV	0.5 KV
3	2 KV	1 KV
4	4 KV	2 KV
X	Special	Special

##### 5.7.3.2. Performance Criterion

Performance Criterion: B

#### 5.7.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.7.1.

#### 5.7.5. Operating Condition of EUT

5.7.5.1. Setup the EUT as shown in Section 5.7.1.

5.7.5.2. Turn on the power of all equipments.

5.7.5.3. Let the EUT work in test mode(1) and measure it.





### 5.7.6. Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

#### 5.7.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 1 mins.

#### 5.7.6.2. For signal lines and control lines ports:

It's unnecessary to test.

#### 5.7.6.3. For DC output line ports:

It's unnecessary to test.

### 5.7.7. Test Results

**PASS.**

Refer to attached Annex B.7



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 5.8. SURGE IMMUNITY TEST

#### 5.8.1. Block Diagram of Test Setup

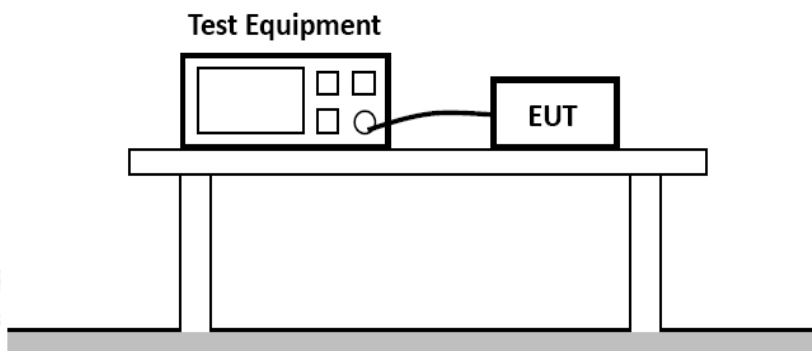

#### 5.8.2. Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-5:2014/A1:2017, Severity Level: Line to Line: Level 2, 1.0KV, Line to Earth: Level 3, 2.0KV)

#### 5.8.3. Severity Levels and Performance Criterion

##### 5.8.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

##### 5.8.3.2. Performance Criterion

Performance Criterion: B

#### 5.8.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.8.1.

#### 5.8.5. Operating Condition of EUT

5.8.5.1. Setup the EUT as shown in Section 5.8.1.

5.8.5.1. Turn on the power of all equipments.

5.8.5.1. Let the EUT work in test mode (1) and measure it.





### 5.8.6. Test Procedure

5.8.6.1. Set up the EUT and test generator as shown on Section 5.8.1.

5.8.6.2. For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

5.8.6.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

5.8.6.4. Different phase angles are done individually.

5.8.6.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

### 5.8.7. Test Results

**PASS.**

Refer to attached Annex B.8



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

## 5.9. INJECTED CURRENTS SUSCEPTIBILITY TEST

### 5.9.1. Block Diagram of Test Setup

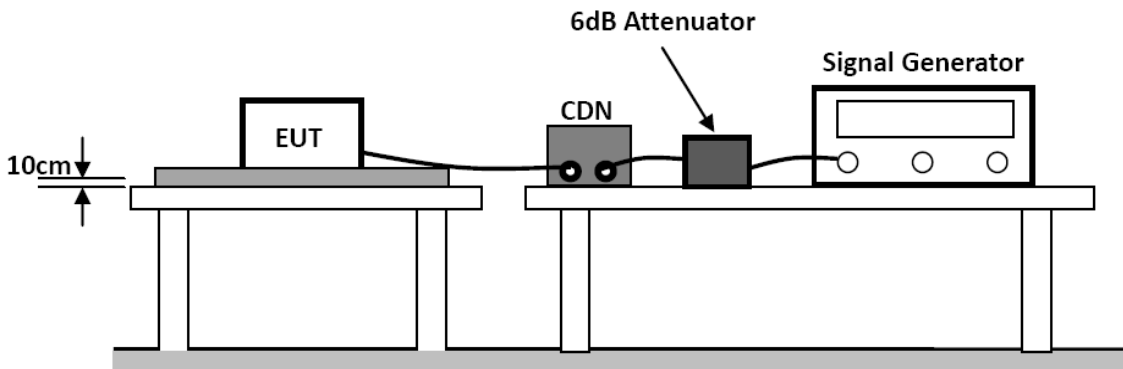

### 5.9.2. Test Standard

EN 55035:2017/A11:2020(EN 61000-4-6:2014/A1:2015, Severity Level: Level 2, (0.15MHz ~ 80MHz))

### 5.9.3. Severity Levels and Performance Criterion

#### 5.9.3.1. Severity level

Level	Field Strength (V)
1	1
2	3
3	10
X	Special

#### 5.9.3.2. Performance Criterion

Performance Criterion: A

### 5.9.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.9.1.

### 5.9.5. Operating Condition of EUT

5.9.5.1. Setup the EUT as shown in Section 5.9.1.

5.9.5.2. Turn on the power of all equipments.

5.9.5.3. Let the EUT work in test mode(1) and measure it.





### 5.9.6. Test Procedure

- 5.9.6.1. Set up the EUT, CDN and test generators as shown on Section 5.9.1.
- 5.9.6.2. Let the EUT work in test mode and measure it.
- 5.9.6.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 5.9.6.4. The disturbance signal described below is injected to EUT through CDN.
- 5.9.6.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 5.9.6.6. The frequency range is swept from 150kHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 5.9.6.7. The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 5.9.6.8. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

### 5.9.7. Test Results

**PASS.**


Refer to attached Annex B.9





## 5.10. MAGNETIC FIELD SUSCEPTIBILITY TEST

### 5.10.1. Block Diagram of Test Setup

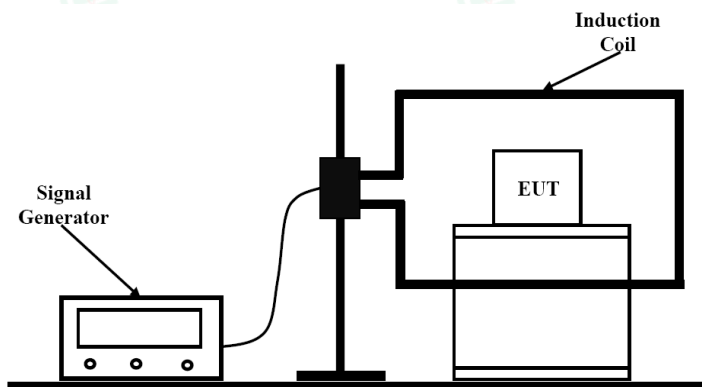

### 5.10.2. Test Standard

EN 55035:2017/A11:2020 (EN 61000-4-8:2010, Severity Level: Level 1, 1A/m)

### 5.10.3. Severity Levels and Performance Criterion

#### 5.10.3.1. Severity level

Level	Field Strength (A/m)
1	1
2	3
3	10
4	30
5	100
X	Special

#### 5.10.3.2. Performance Criterion

Performance Criterion: A

### 5.10.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.10.1.

### 5.10.5. Test Procedure

EUT is placed on an insulating support of 0.1m high above a table of 0.8m high. There is a minimum 1m\*1m ground metallic plane put on this table. EUT is put in the center of the magnetic coil then two orientations of the magnetic coil, horizontal and vertical, shall be rotated in order to expose the EUT to the difference polarization magnetic field.

Record any performance degradation of the EUT during the test and judge the test result according to performance criterion.

### 5.10.6. Test Results

**PASS.**

Refer to attached Annex B.10



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5.11. VOLTAGE DIPS AND INTERRUPTIONS TEST

### 5.11.1. Block Diagram of Test Setup

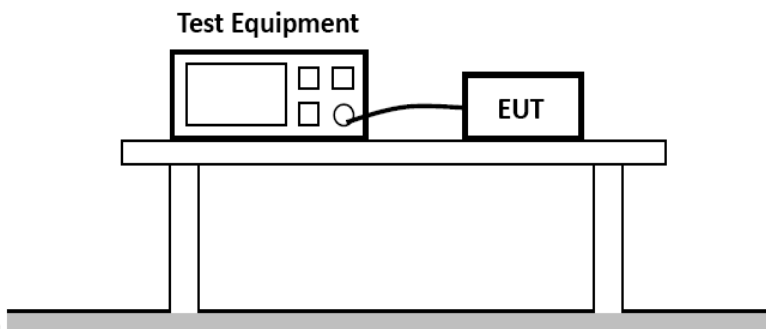

### 5.11.2. Test Standard

EN 55035:2017/A11:2020 (EN IEC 61000-4-11:2020/AC: 2020)

### 5.11.3. Severity Levels and Performance Criterion

#### 5.11.3.1. Severity level

Test Level		
Voltage Reduction $\%U_T$	Voltage Dips $\%U_T$	Duration (in Period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction $\%U_T$	Voltage Dips $\%U_T$	Duration (in Period)
100	0	250

#### 5.11.3.2. Performance Criterion

Performance Criterion: B&C

### 5.11.4. EUT Configuration on Test

The configuration of EUT is listed in Section 5.11.1.

### 5.11.5. Operating Condition of EUT

5.11.5.1. Setup the EUT as shown in Section 5.11.1.

5.11.5.2. Turn on the power of all equipments.

5.11.5.3. Let the EUT work in test mode (1) and measure it.

### 5.11.6. Test Procedure

5.11.6.1. Set up the EUT and test generator as shown on Section 5.11.1.

5.11.6.2. The interruptions are introduced at selected phase angles with specified duration.

5.11.6.3. Record any degradation of performance.

### 5.11.7. Test Results

**PASS.**

Refer to attached Annex B.11



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



### Annex A (Test photograph)



Test Setup Photo of Power Line Conducted Measurement

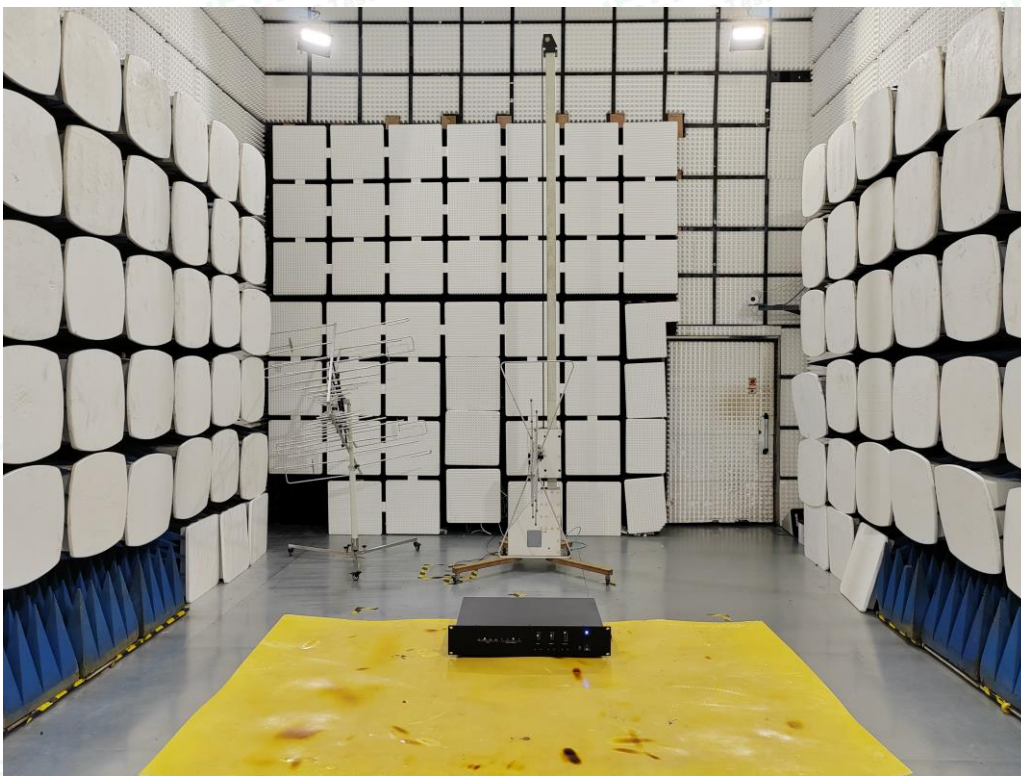

Test Setup Photo of Radiated Measurement (30MHz~1GHz)





Test Setup Photo of Harmonic & Flicker Measurement



Test Setup Photo of Electrostatic Discharge Test





Photo of Electrical Fast Transient/Burst Test & Surge Immunity Test




Test Setup Photo of Injected Currents Susceptibility Test





Test Setup Photo of Voltage Dips and Interruptions Test

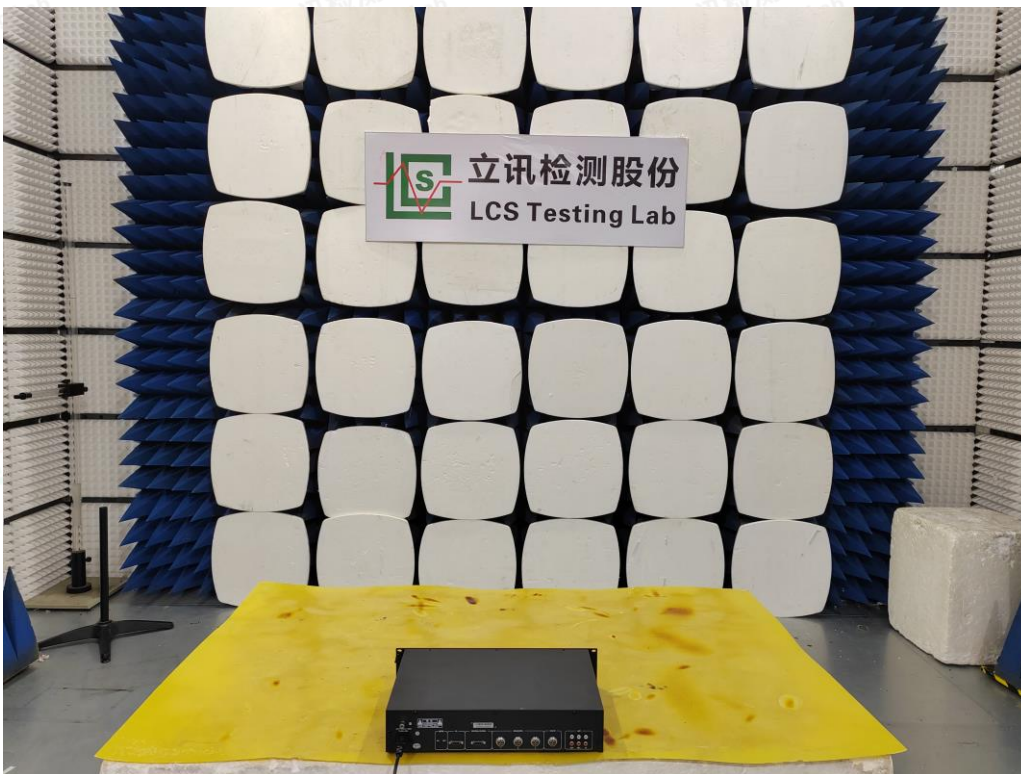

Test Setup Photo of RF Field Strength Susceptibility






### ANNEX B

(Emission and Immunity test results)

#### B.1 POWER LINE CONDUCTED EMISSION MEASUREMENT

Environmental Conditions:	23.5°C, 53.6% RH
Test Voltage:	AC 230V,50Hz
Test Model:	TS-0604M
Test Mode:	Working
Test Engineer:	Paul Xie
Pol:	Line

Detailed results are shown below

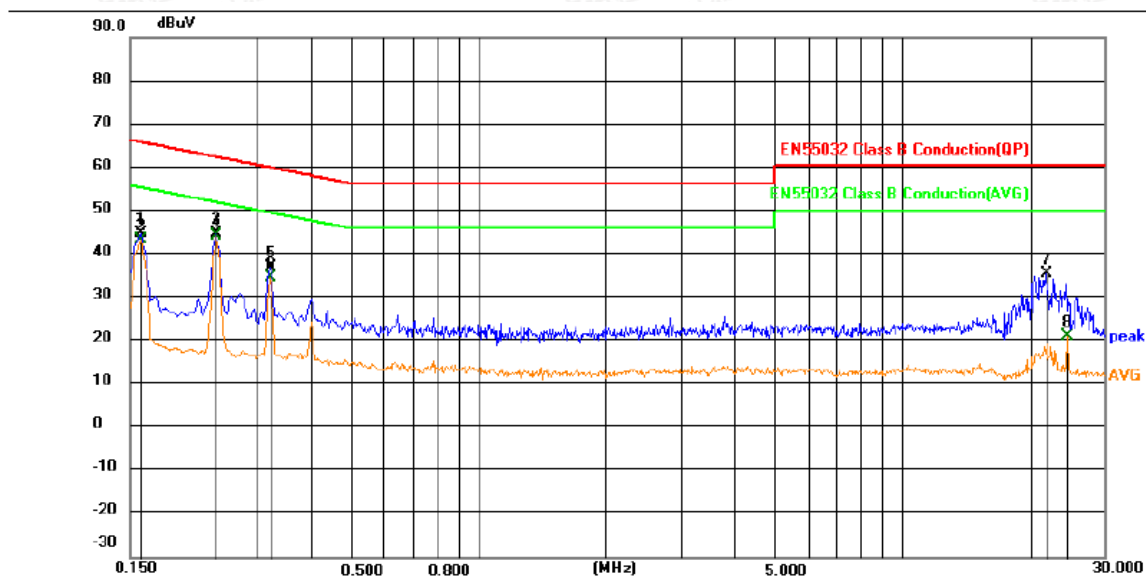

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	25.20	19.63	44.83	65.52	-20.69	peak	
2		0.1590	23.72	19.63	43.35	55.52	-12.17	AVG	
3		0.2401	25.25	19.63	44.88	62.09	-17.21	peak	
4	*	0.2401	24.56	19.63	44.19	52.09	-7.90	AVG	
5		0.3211	17.33	19.63	36.96	59.68	-22.72	peak	
6		0.3211	14.97	19.63	34.60	49.68	-15.08	AVG	
7		21.7501	15.32	20.11	35.43	60.00	-24.57	peak	
8		24.5716	1.26	20.03	21.29	50.00	-28.71	AVG	


Note: Margin= Reading level + Correct factor – Limit  
 Correct Factor= Lisen Factor+Cable Factor+Limiter Factor





Environmental Conditions:	23.5°C, 53.6% RH
Test Voltage:	AC 230V,50Hz
Test Model:	TS-0604M
Test Mode:	Working
Test Engineer:	Paul Xie
Pol:	Neutral

Detailed results are shown below

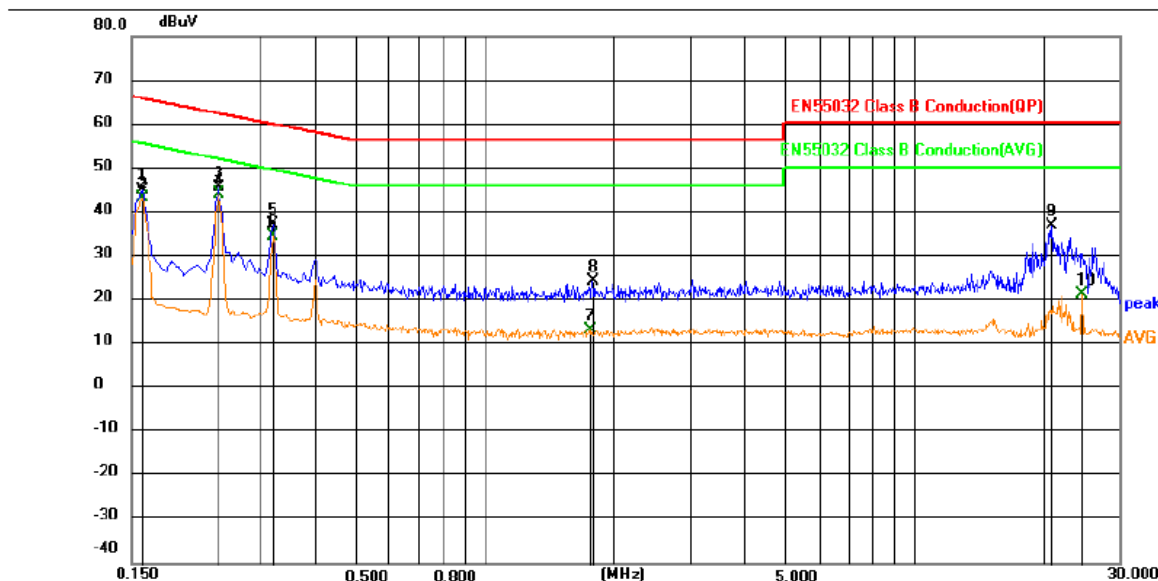

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1590	25.39	19.63	45.02	65.52	-20.50	peak	
2		0.1590	23.75	19.63	43.38	55.52	-12.14	AVG	
3		0.2401	25.92	19.63	45.55	62.09	-16.54	peak	
4	*	0.2401	24.56	19.63	44.19	52.09	-7.90	AVG	
5		0.3211	17.74	19.63	37.37	59.68	-22.31	peak	
6		0.3211	14.94	19.63	34.57	49.68	-15.11	AVG	
7		1.7611	-6.47	19.67	13.20	46.00	-32.80	AVG	
8		1.7746	4.75	19.67	24.42	56.00	-31.58	peak	
9		20.8771	16.88	20.15	37.03	60.00	-22.97	peak	
10		24.5716	1.30	20.03	21.33	50.00	-28.67	AVG	

Note: Margin= Reading level + Correct factor – Limit  
 Correct Factor= Lisen Factor+Cable Factor+Limiter Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



### B.2 Radiated Disturbance Test Results (30MHz to 1000MHz)

Environmental Conditions:	22.3°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	TS-0604M
Test Mode:	Working
Test Engineer:	Paul Xie
Pol:	Vertical
Note	

Detailed results are shown below

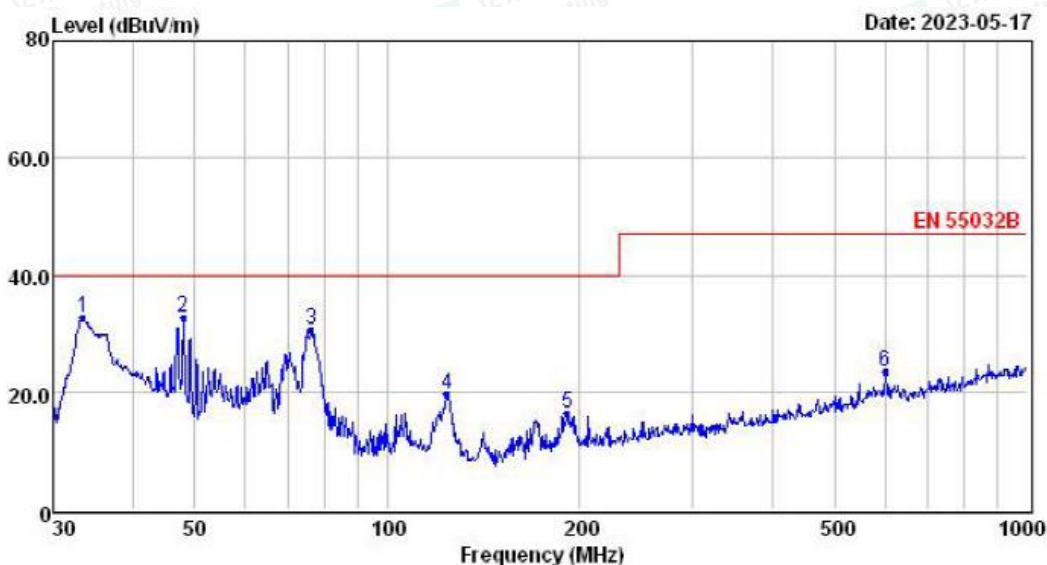

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	33.44	21.40	0.44	10.81	32.65	40.00	-7.35	QP
2	47.99	19.99	0.58	12.13	32.70	40.00	-7.30	QP
3	75.98	19.86	0.72	9.95	30.53	40.00	-9.47	QP
4	124.13	8.67	0.92	10.09	19.68	40.00	-20.32	QP
5	191.07	4.69	1.17	10.35	16.21	40.00	-23.79	QP
6	601.43	2.72	1.50	19.28	23.50	47.00	-23.50	QP


- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported





Environmental Conditions:	22.3°C, 53% RH
Test Voltage:	AC 230V,50Hz
Test Model:	TS-0604M
Test Mode:	Working
Test Engineer:	Paul Xie
Pol:	Horizontal
Note	

Detailed results are shown below

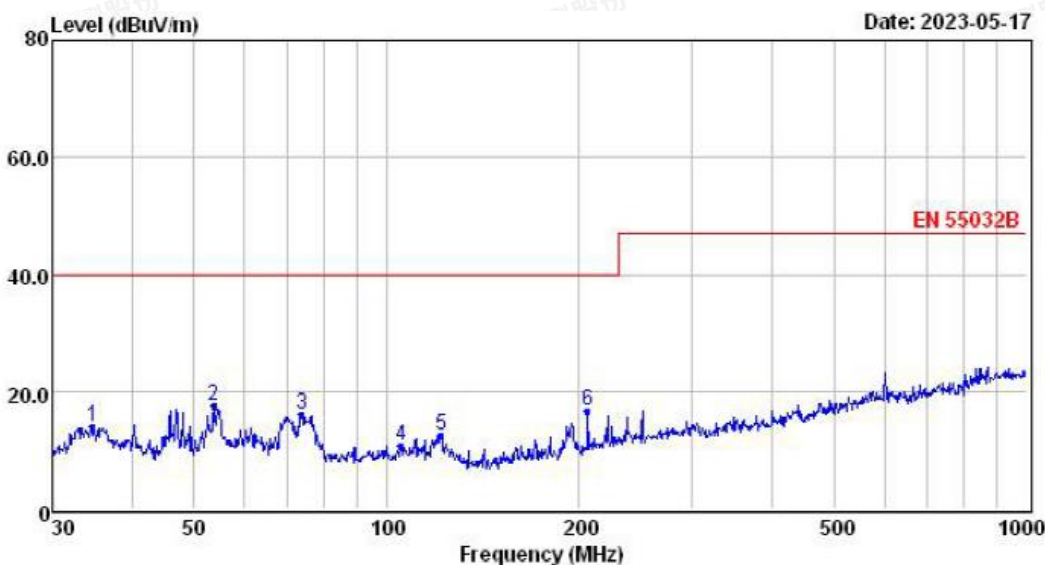

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.76	2.63	0.46	10.89	13.98	40.00	-26.02	QP
2	53.69	4.36	0.62	12.56	17.54	40.00	-22.46	QP
3	73.62	5.39	0.71	10.05	16.15	40.00	-23.85	QP
4	105.27	-1.14	0.83	11.08	10.77	40.00	-29.23	QP
5	121.55	1.27	0.91	10.41	12.59	40.00	-27.41	QP
6	206.40	4.38	1.21	11.09	16.68	40.00	-23.32	QP

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported







### B.3 HARMONIC CURRENT EMISSION MEASUREMENT

Customer : xxx

Result : Pass

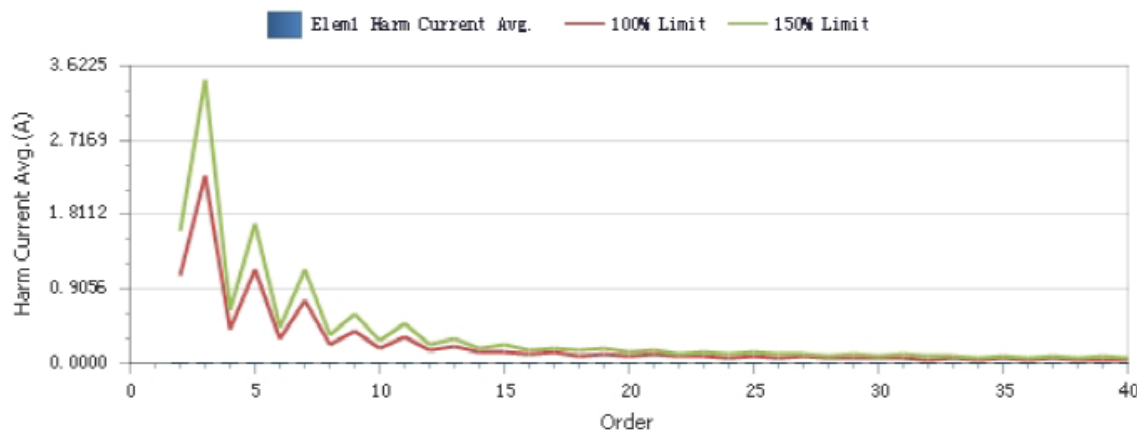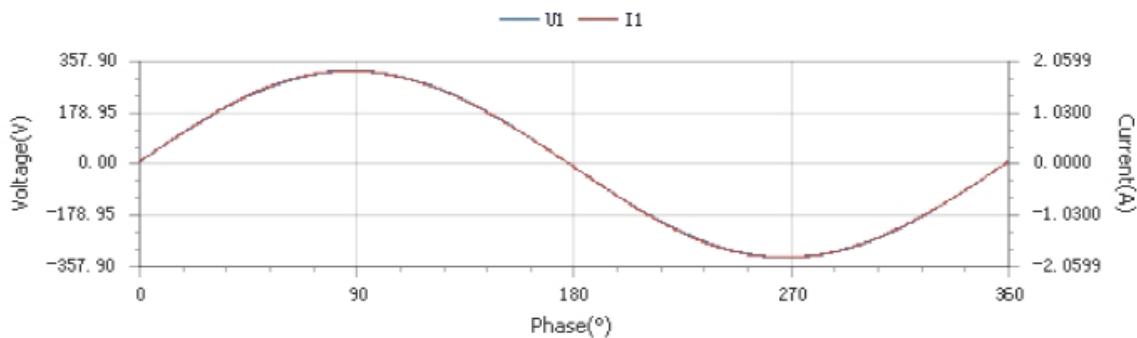



Customer : xxx

Result : Pass

Total Current Harmonic ans Some Odd Harmonic Parameters

THC(A)	0.0081	THD(%)	0.61	POHC(A)	0.0003	POHC Limit(A)	0.2514
--------	--------	--------	------	---------	--------	---------------	--------

Maximum Value of Relevant Parameter During Test Period

Urms (V)	229.91	Freq(Hz)	50.000
Irms (A)	1.3241	Ipeak(A)	1.8729
I1(A)	1.3241	ICF	1.4150
P(W)	304.44	λ	1.0000

Determination of Harmonics and Limits

Order (n)	Harmonics Current Avg. (A)	100% Limit (A)	Limit Percent (%)	Harmonics Current Max. (A)	150% Limit (A)	Limit Percent (%)	Result
2	0.0002	1.0800	N/A	0.0003	1.6200	N/A	Pass
3	0.0081	2.3000	0.35	0.0082	3.4500	0.24	Pass
4	0.0000	0.4300	N/A	0.0001	0.6450	N/A	Pass
5	0.0001	1.1400	N/A	0.0001	1.7100	N/A	Pass
6	0.0000	0.3000	N/A	0.0001	0.4500	N/A	Pass
7	0.0001	0.7700	N/A	0.0001	1.1550	N/A	Pass
8	0.0000	0.2300	N/A	0.0000	0.3450	N/A	Pass
9	0.0001	0.4000	N/A	0.0001	0.6000	N/A	Pass
10	0.0001	0.1840	N/A	0.0001	0.2760	N/A	Pass
11	0.0000	0.3300	N/A	0.0001	0.4950	N/A	Pass
12	0.0001	0.1533	N/A	0.0001	0.2300	N/A	Pass
13	0.0001	0.2100	N/A	0.0001	0.3150	N/A	Pass
14	0.0000	0.1314	N/A	0.0000	0.1971	N/A	Pass
15	0.0001	0.1500	N/A	0.0001	0.2250	N/A	Pass
16	0.0000	0.1150	N/A	0.0000	0.1725	N/A	Pass
17	0.0000	0.1324	N/A	0.0000	0.1985	N/A	Pass
18	0.0000	0.1022	N/A	0.0000	0.1533	N/A	Pass
19	0.0001	0.1184	N/A	0.0001	0.1776	N/A	Pass
20	0.0000	0.0920	N/A	0.0000	0.1380	N/A	Pass
21	0.0001	0.1071	N/A	0.0001	0.1607	N/A	Pass
22	0.0000	0.0836	N/A	0.0000	0.1255	N/A	Pass
23	0.0001	0.0978	N/A	0.0001	0.1467	N/A	Pass
24	0.0000	0.0767	N/A	0.0000	0.1150	N/A	Pass
25	0.0001	0.0900	N/A	0.0001	0.1350	N/A	Pass
26	0.0000	0.0708	N/A	0.0000	0.1062	N/A	Pass
27	0.0001	0.0833	N/A	0.0001	0.1250	N/A	Pass
28	0.0000	0.0657	N/A	0.0000	0.0986	N/A	Pass
29	0.0001	0.0776	N/A	0.0001	0.1164	N/A	Pass
30	0.0000	0.0613	N/A	0.0000	0.0920	N/A	Pass
31	0.0001	0.0726	N/A	0.0001	0.1089	N/A	Pass
32	0.0000	0.0575	N/A	0.0000	0.0863	N/A	Pass
33	0.0001	0.0682	N/A	0.0001	0.1023	N/A	Pass
34	0.0000	0.0541	N/A	0.0000	0.0812	N/A	Pass
35	0.0001	0.0643	N/A	0.0001	0.0964	N/A	Pass
36	0.0000	0.0511	N/A	0.0000	0.0767	N/A	Pass
37	0.0001	0.0608	N/A	0.0001	0.0912	N/A	Pass
38	0.0000	0.0484	N/A	0.0000	0.0726	N/A	Pass
39	0.0001	0.0577	N/A	0.0001	0.0865	N/A	Pass
40	0.0000	0.0460	N/A	0.0000	0.0690	N/A	Pass

立讯检测股份  
LCS Lab



立讯检测股份  
LCS Testing Lab



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Customer : xxx

Result : Pass

## Determination of Voltage Relevant Parameter During Test Period

Item	Nominal Value	Tested Value	Error Value	Allowable Error Value	Result
Urms (V)	230.00	229.89	0.11	±2.0%	Pass
Frequency (Hz)	50.000	49.998	0.002	±0.5%	Pass
CFU	1.4100	1.4156	0.0056	±0.01	Pass
Peak-Volt Phase	90.00	90.44	0.44	±3	Pass

## Determination of Voltage Harmonics and Limits

Order (n)	Uhdf	Limit (%)	Limit Percent (%)	Result
1	100%	---	---	---
2	0.01%	0.20	5.63%	Pass
3	0.01%	0.90	0.98%	Pass
4	0.00%	0.20	1.01%	Pass
5	0.00%	0.40	1.08%	Pass
6	0.00%	0.20	1.50%	Pass
7	0.00%	0.30	1.28%	Pass
8	0.00%	0.20	0.88%	Pass
9	0.01%	0.20	3.90%	Pass
10	0.00%	0.20	2.07%	Pass
11	0.00%	0.10	2.34%	Pass
12	0.00%	0.10	4.59%	Pass
13	0.00%	0.10	4.92%	Pass
14	0.00%	0.10	2.34%	Pass
15	0.00%	0.10	4.32%	Pass
16	0.00%	0.10	1.06%	Pass
17	0.00%	0.10	2.13%	Pass
18	0.00%	0.10	0.82%	Pass
19	0.01%	0.10	5.53%	Pass
20	0.00%	0.10	1.02%	Pass
21	0.01%	0.10	8.29%	Pass
22	0.00%	0.10	1.11%	Pass
23	0.01%	0.10	8.66%	Pass
24	0.00%	0.10	0.91%	Pass
25	0.01%	0.10	7.75%	Pass
26	0.00%	0.10	0.86%	Pass
27	0.01%	0.10	8.36%	Pass
28	0.00%	0.10	0.90%	Pass
29	0.01%	0.10	7.87%	Pass
30	0.00%	0.10	1.20%	Pass
31	0.01%	0.10	6.92%	Pass
32	0.00%	0.10	0.74%	Pass
33	0.01%	0.10	7.08%	Pass
34	0.00%	0.10	1.15%	Pass
35	0.00%	0.10	4.81%	Pass
36	0.00%	0.10	1.40%	Pass
37	0.00%	0.10	4.55%	Pass
38	0.00%	0.10	1.02%	Pass
39	0.00%	0.10	4.69%	Pass
40	0.00%	0.10	1.13%	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




### B.4 VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT


<b>Test Model</b>	TS-0604M	<b>Test Engineer</b>	Paul Xie
<b>Test Voltage</b>	AC 230V/50Hz		

Customer : Result : PASS

Pst and Limit

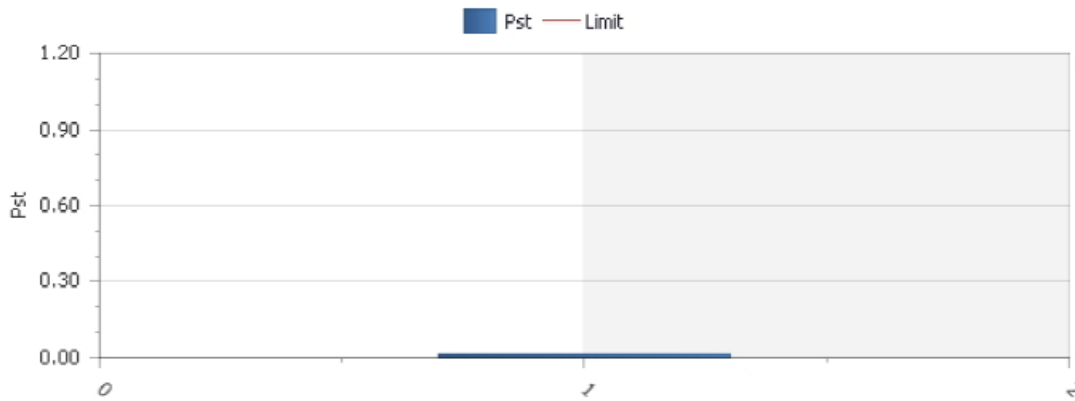

Plt and Limit

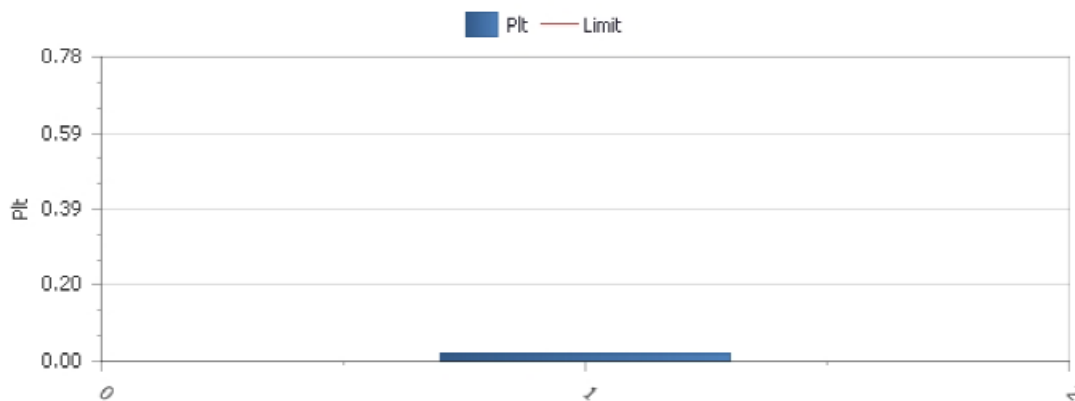

Relevant Parameter and Judgement During Test Period

Vrms at the end of test (V)	219.91			
Error Max (%)		Test Limit (%)		
T-max (ms)	0.00	Test Limit (ms)	500	Pass
dc (%)	0.00	Test Limit (%)	3.30	Pass
dmax (%)	0.00	Test Limit (%)	4.00	Pass
Pst	0.017	Test Limit	1.000	Pass
Plt	0.017	Test Limit	0.650	Pass





B.5 ELECTROSTATIC DISCHARGE IMMUNITY TEST

Electrostatic Discharge Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	Guangdong Baolun Electronics Co., Ltd.		
EUT	Conference System	Temperature	22.3°C
M/N	TS-0604M	Humidity	52.3%
Criterion	B	Pressure	1021mbar
Test Mode	Working	Test Engineer	Paul Xie

Air Discharge						
Test Points	Test Levels			Results		
	± 2kV	± 4kV	± 8kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

Contact Discharge						
Test Points	Test Levels		Results			
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	

Discharge To Horizontal Coupling Plane						
Side of EUT	Test Levels		Results			
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	

Discharge To Vertical Coupling Plane						
Side of EUT	Test Levels		Results			
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion	
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B	



**B.6 RF FIELD STRENGTH SUSCEPTIBILITY TEST****RF Field Strength Susceptibility Test Results**

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-3 <input checked="" type="checkbox"/> EN IEC 61000-4-3		
<b>Applicant</b>	Guangdong Baolun Electronics Co., Ltd.		
<b>EUT</b>	Conference System	<b>Temperature</b>	21.5°C
<b>M/N</b>	TS-0604M	<b>Humidity</b>	53.5%
<b>Field Strength</b>	3 V/m	<b>Criterion</b>	A
<b>Test Mode</b>	Working	<b>Test Engineer</b>	Paul Xie
<b>Test Frequency</b>	80MHz to 1000MHz (swept test) 1800MHz, 2600MHz, 3500MHz, 5000MHz (spot test)		
<b>Modulation</b>	<input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%		
<b>Steps</b>	1%		

	<b>Horizontal</b>	<b>Vertical</b>
<b>Front</b>	PASS	PASS
<b>Right</b>	PASS	PASS
<b>Rear</b>	PASS	PASS
<b>Left</b>	PASS	PASS

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



B.7 ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

# Electrical Fast Transient/Burst Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
<b>Applicant</b>	Guangdong Baolun Electronics Co., Ltd.		
<b>EUT</b>	Conference System	<b>Temperature</b>	22.5°C
<b>M/N</b>	TS-0604M	<b>Humidity</b>	52.8%
<b>Test Mode</b>	Working	<b>Criterion</b>	B
<b>Test Engineer</b>	Paul Xie		

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity

**B.8 SURGE IMMUNITY TEST****Surge Immunity Test Result**

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
<b>Applicant</b>	Guangdong Baolun Electronics Co., Ltd.		
<b>EUT</b>	Conference System	<b>Temperature</b>	24.3°C
<b>M/N</b>	TS-0604M	<b>Humidity</b>	52.6%
<b>Test Mode</b>	Working	<b>Criterion</b>	B
<b>Test Engineer</b>	Paul Xie		

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	90	5	1.0	PASS
	-	270	5	1.0	PASS
L-PE					
N-PE					
Signal Line					
Note					



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**B.9 INJECTED CURRENTS SUSCEPTIBILITY TEST**

Injected Currents Susceptibility Test Results			
<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
<b>Applicant</b>	Guangdong Baolun Electronics Co., Ltd.		
<b>EUT</b>	Conference System	<b>Temperature</b>	23.3°C
<b>M/N</b>	TS-0604M	<b>Humidity</b>	52.3%
<b>Test Mode</b>	Working	<b>Criterion</b>	A
<b>Test Engineer</b>	Paul Xie		

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 10	AC Mains	3V	A	PASS
10 ~ 30		3V ~ 1V		
30 ~ 80		1V		

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### B.10 MAGNETIC FIELD SUSCEPTIBILITY TEST

**N/A**

Applicable only to equipment containing devices intrinsically susceptible to magnetic fields, such as CRT monitors, Hall effect elements, electro-dynamic microphones, magnetic field sensors or audio frequency transformers.



**B.11 VOLTAGE DIPS AND INTERRUPTIONS TEST****Voltage Dips And Interruptions Test Results**

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN IEC 61000-4-11		
<b>Applicant</b>	Guangdong Baolun Electronics Co., Ltd.		
<b>EUT</b>	Conference System	<b>Temperature</b>	24.2°C
<b>M/N</b>	TS-0604M	<b>Humidity</b>	51.3%
<b>Test Mode</b>	Working	<b>Criterion</b>	B&C
<b>Test Engineer</b>	Paul Xie		

Test Level % U <sub>T</sub>	Voltage Dips & Short Interruptions % U <sub>T</sub>	Duration (in periods)	Criterion	Result
0	100	0.5P	B	PASS
70	30	25P	C	PASS
0	100	250P	C	PASS

Note:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## ANNEX C

(External and internal photos of the EUT)

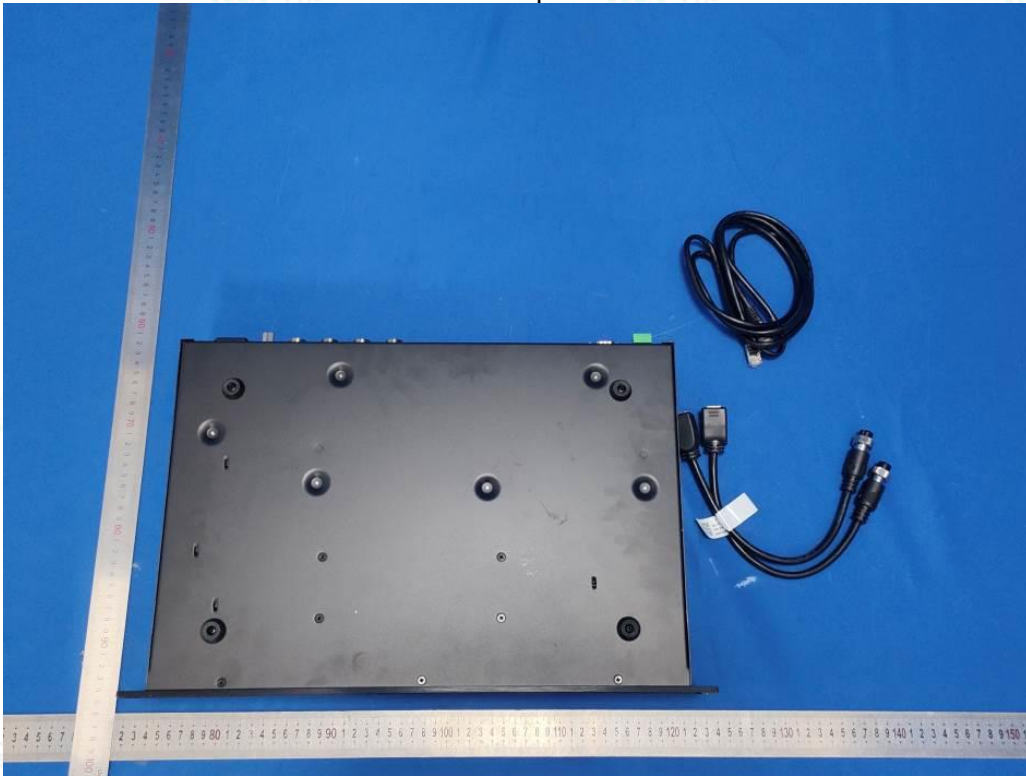


Fig. 1

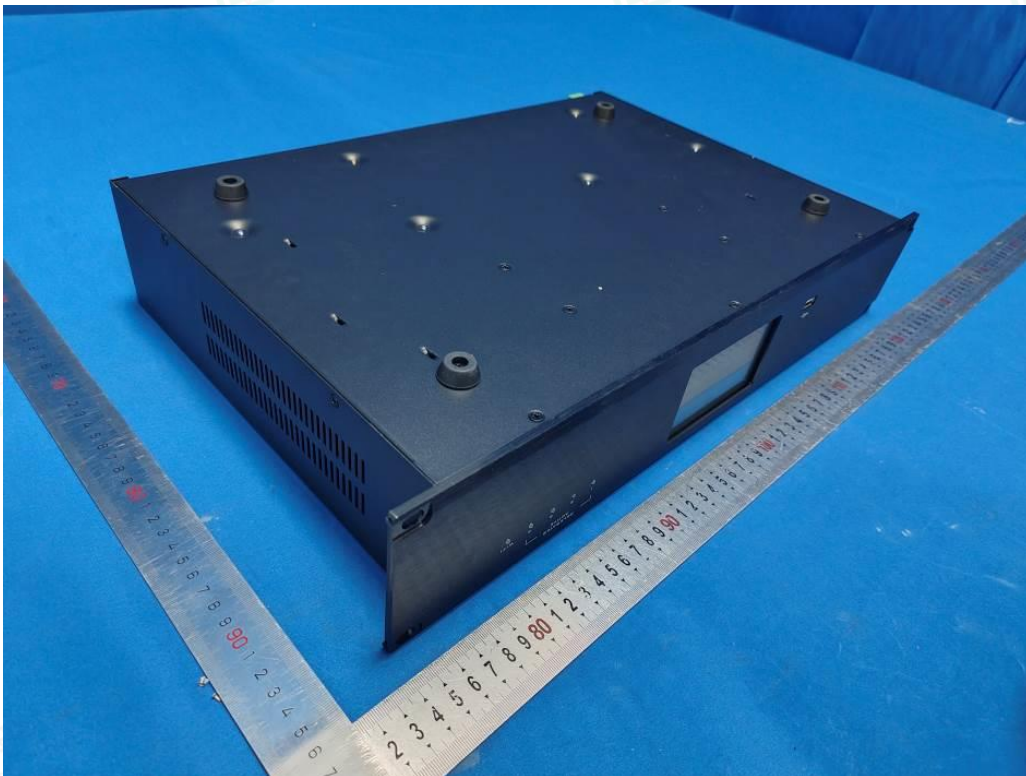


Fig. 2





Fig. 3



Fig. 4





Fig. 5

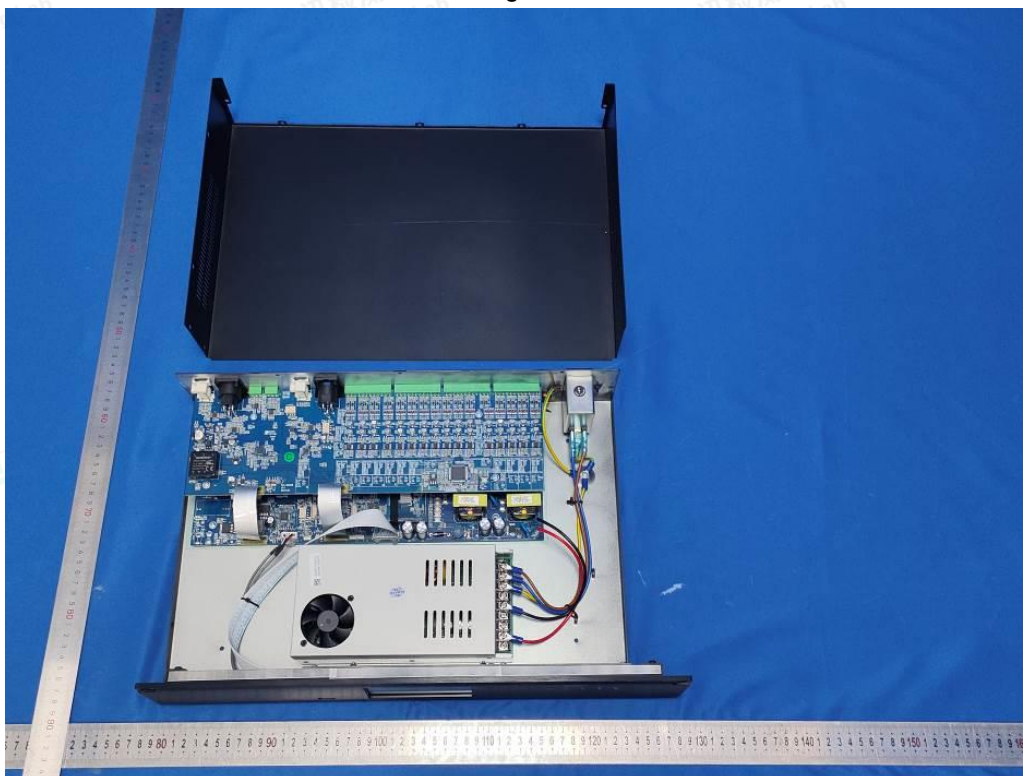


Fig. 6



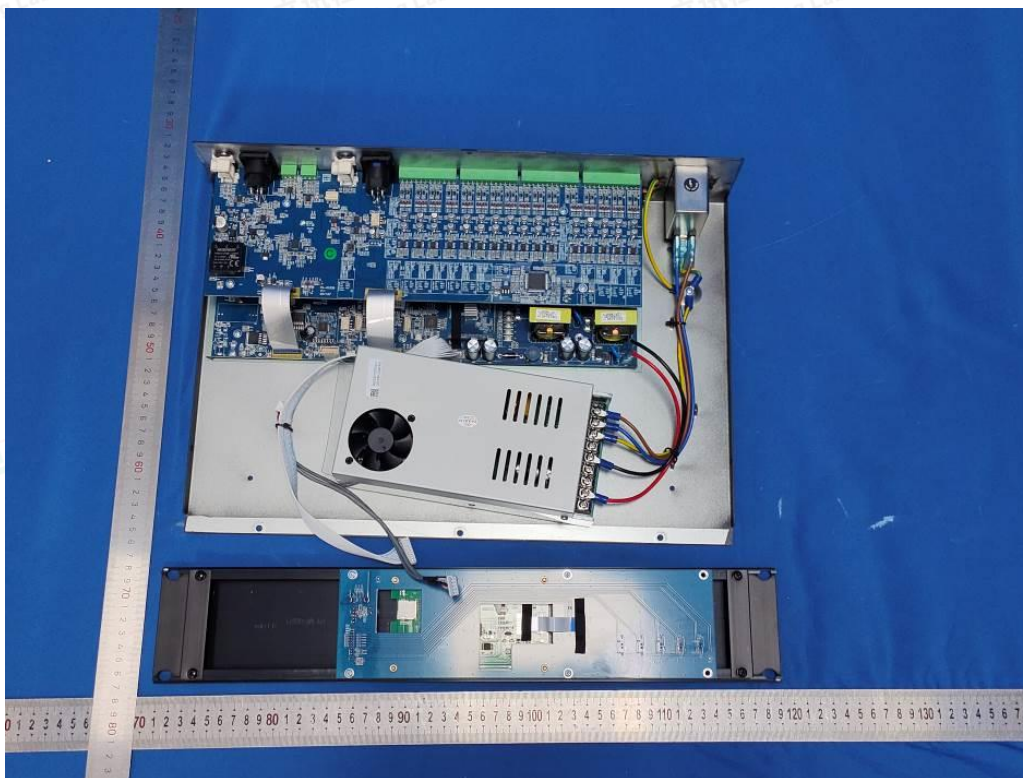


Fig. 7

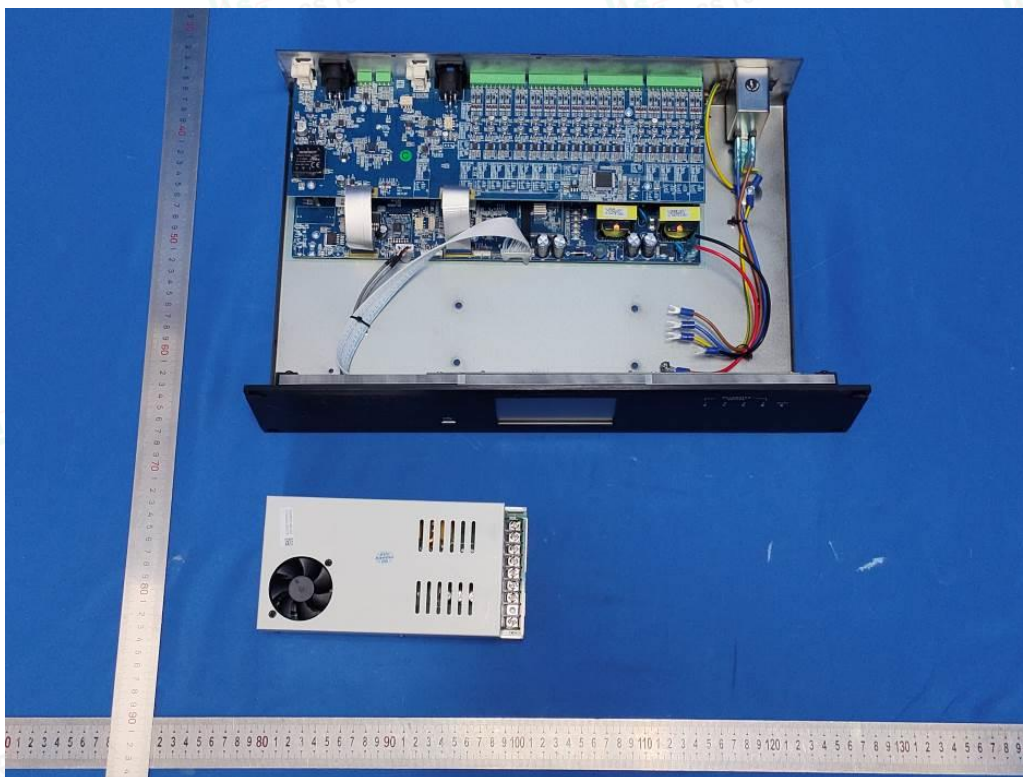


Fig. 8



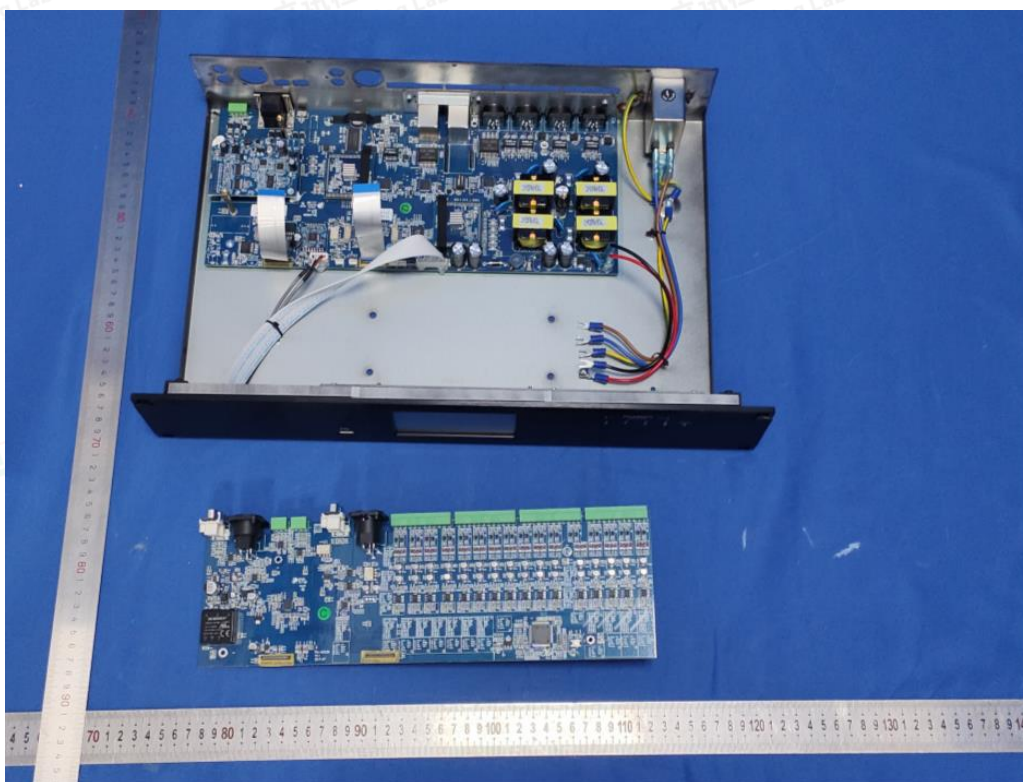


Fig. 9



Fig. 10



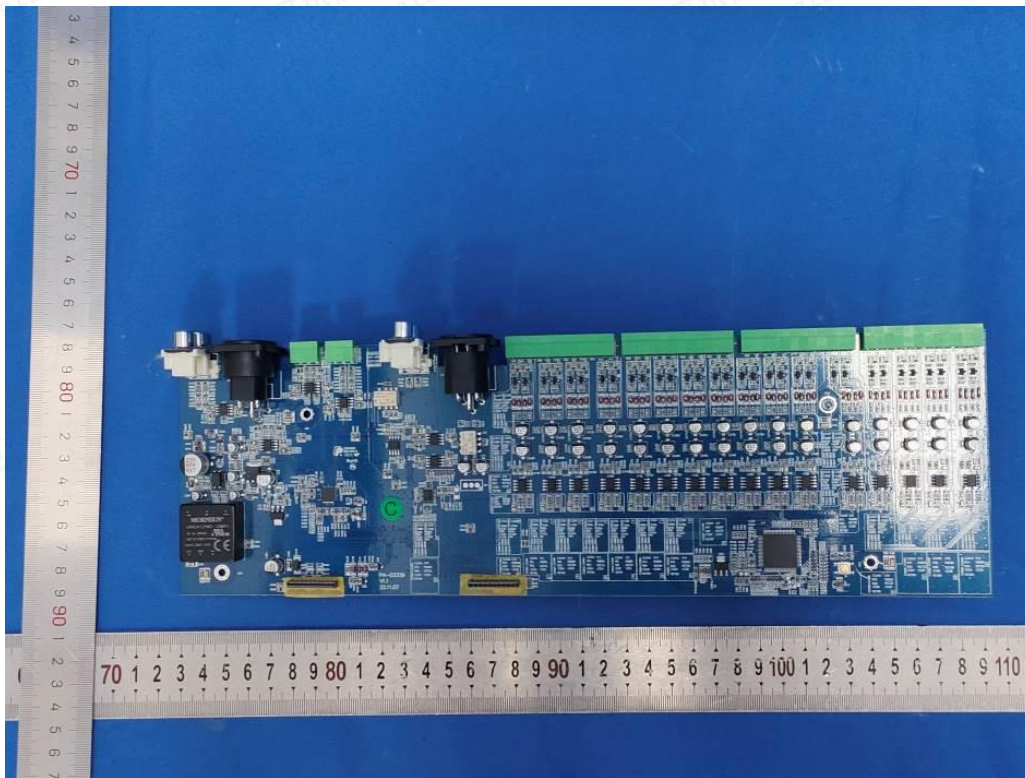


Fig. 11

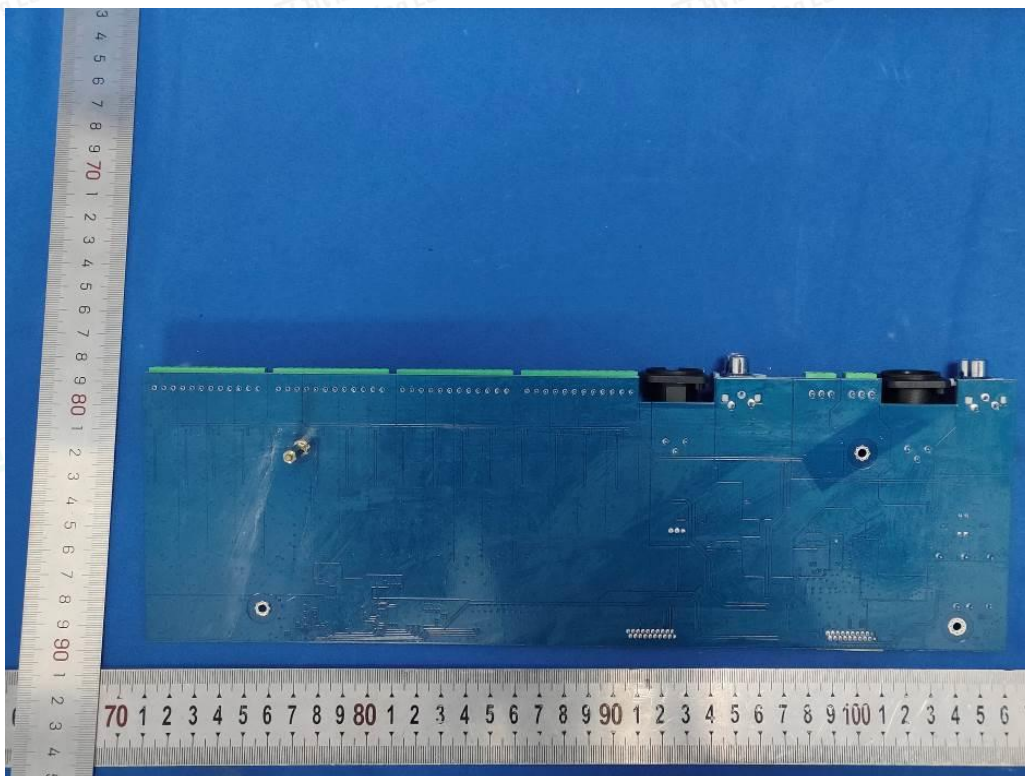


Fig. 12



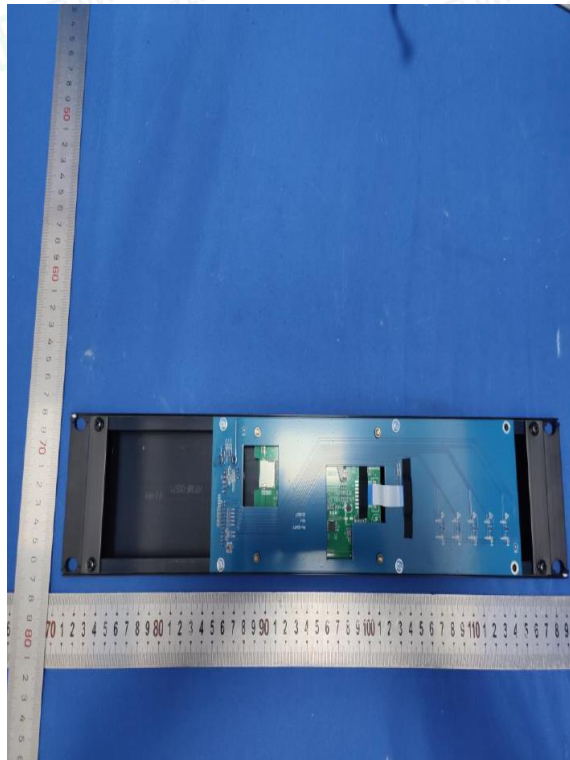


Fig. 13

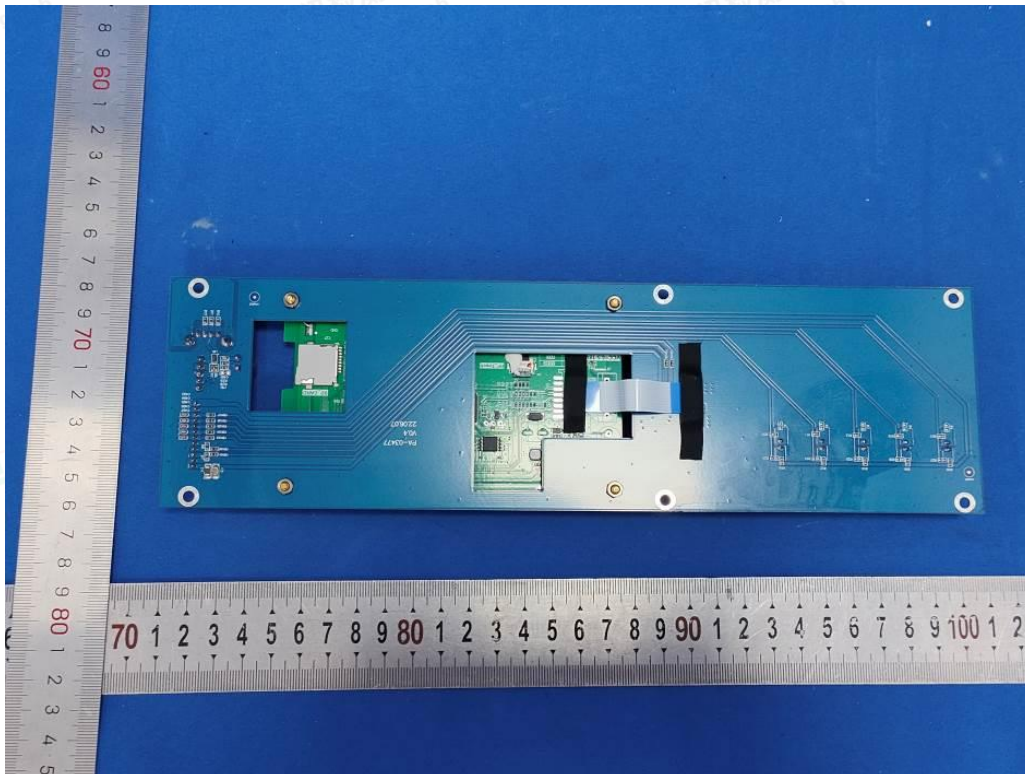


Fig. 14



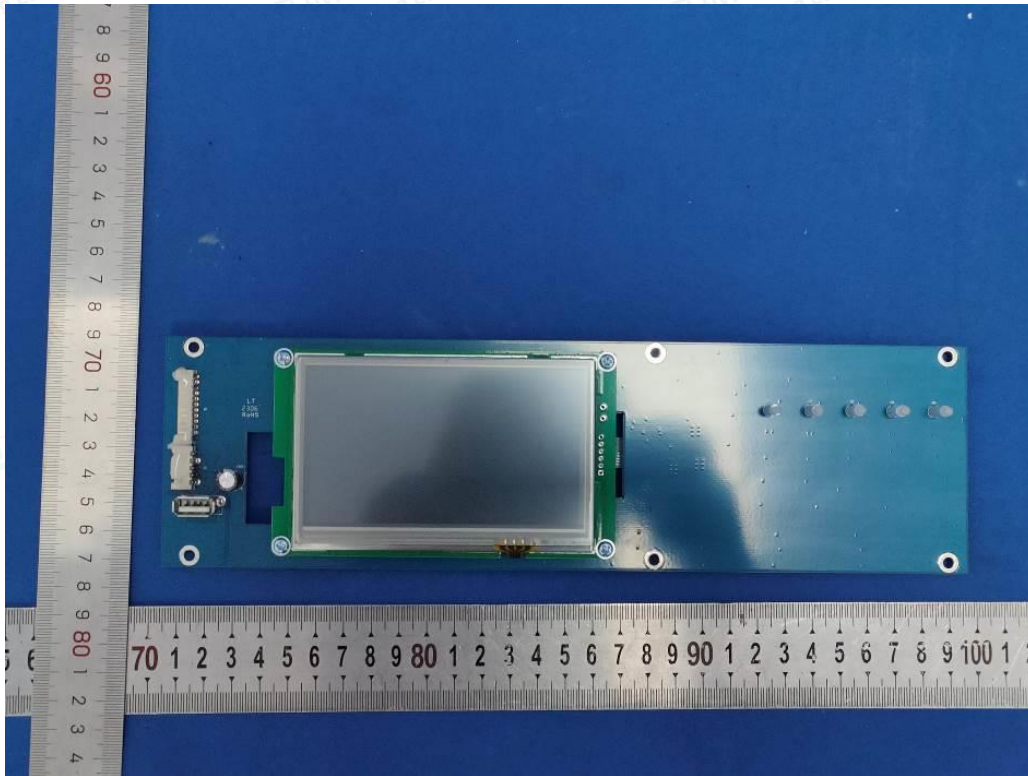


Fig. 15

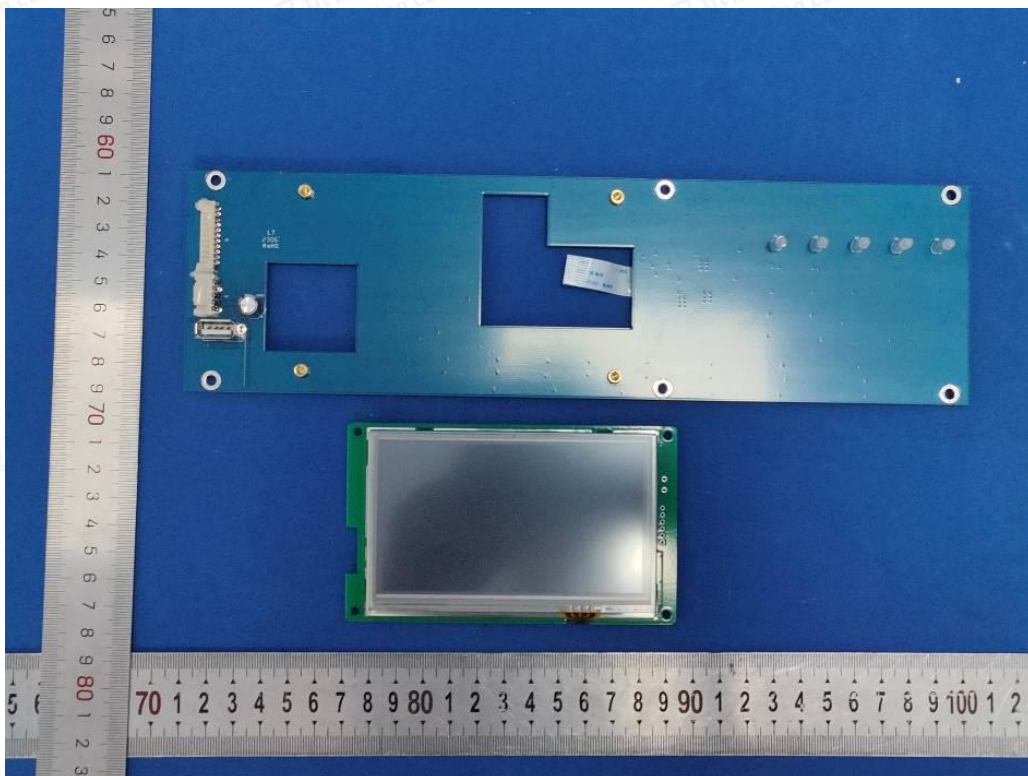


Fig. 16



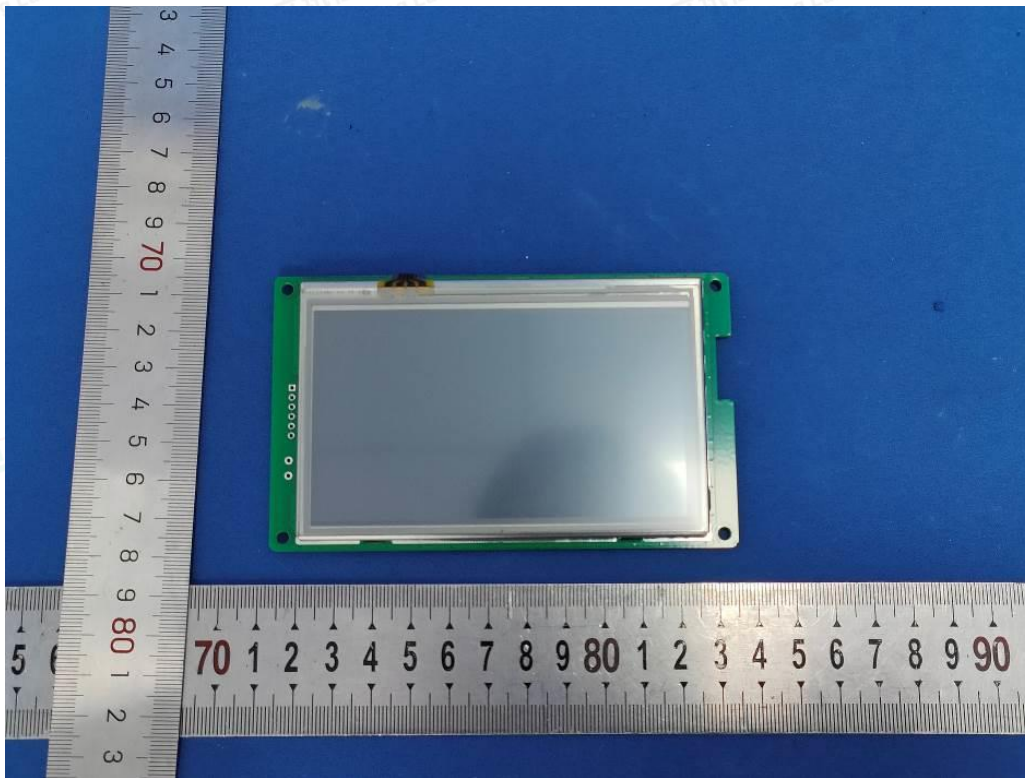


Fig. 17

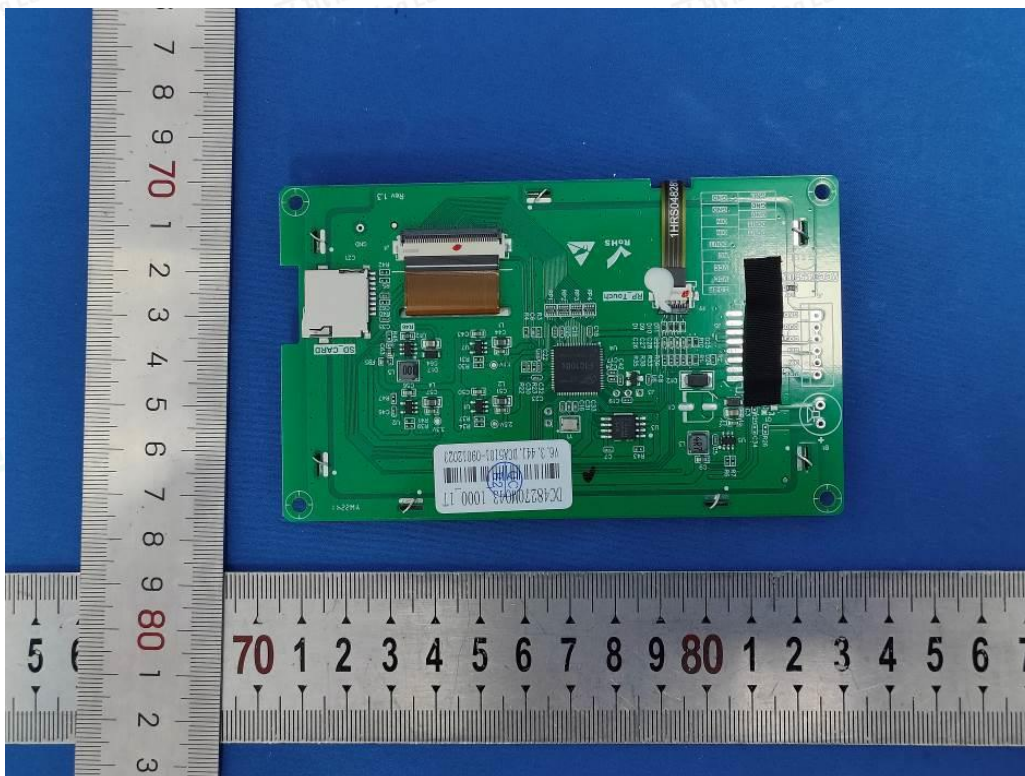


Fig. 18





Fig. 19



Fig. 20



----- THE END OF TEST REPORT -----

