



TEST REPORT
EN 62368-1
Audio/video, information and communication technology equipment
Part 1: Safety requirements

Report Number..... : LCSA01084133S003

Date of issue : 2024-08-12

Total number of pages : 88

Name of Testing Laboratory preparing the Report : Shenzhen LCS Compliance Testing Laboratory Ltd.

Applicant's name : Guangdong Baolun Electronics Co., Ltd.

Address : No.56 Nanlidong Road Shiqi Panyu Guangzhou

Test specification:

Standard : EN IEC 62368-1:2020+A11:2020

Test procedure..... : Type test

Non-standard test method..... : N/A

TRF template used : IECEE OD-2020-F1:2021, Ed.1.4

Test Report Form No..... : IEC62368_1E

Test Report Form(s) Originator.... : UL(US)

Master TRF : Dated 2022-04-14

Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.





| | | |
|---|---|--------------------|
| Test item description | Conference System | |
| Trade Mark(s) | ITC | |
| Manufacturer | Same as applicant | |
| Model/Type reference | See model list on page 7 for details | |
| Ratings | Input: 220-240V~, 50/60Hz, 340W max. | |
| Responsible Testing Laboratory (as applicable), testing procedure and testing location(s): | | |
| <input checked="" type="checkbox"/> Testing Laboratory: | Shenzhen LCS compliance testing laboratory Ltd. | |
| Testing location/ address | Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China | |
| Prepared by | Mona Tao Project Handler | <i>Mona Tao</i> |
| Checked by | Benson Kuai Reviewer | <i>Benson Kuai</i> |
| Approved by | Hart Qiu Technical Director | <i>Hart Qiu</i> |






| | |
|---|--|
| List of Attachments (including a total number of pages in each attachment): | |
| Attachment No.1: European group differences and national differences. | |
| Attachment No.2: Photo document. | |
| Summary of testing: | |
| Tests performed (name of test and test clause): | Testing location: |
| The submitted samples were found to comply with the requirements of: | Shenzhen LCS Compliance Testing Laboratory Ltd. Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China |
| Electrical safety: | |
| ➢ EN IEC 62368-1:2020+A11:2020 | |
| Summary of compliance with National Differences (List of countries addressed): | |
| <input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN IEC 62368-1:2020+A11:2020.</u> | |
| Use of uncertainty of measurement for decisions on conformity (decision rule): | |
| <input checked="" type="checkbox"/> No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method"). | |
| <input type="checkbox"/> Other: (to be specified, for example when required by the standard or client, or if national accreditation requirements apply) | |
| Information on uncertainty of measurement: | |
| The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE. | |
| IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer. | |
| Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing. | |





Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

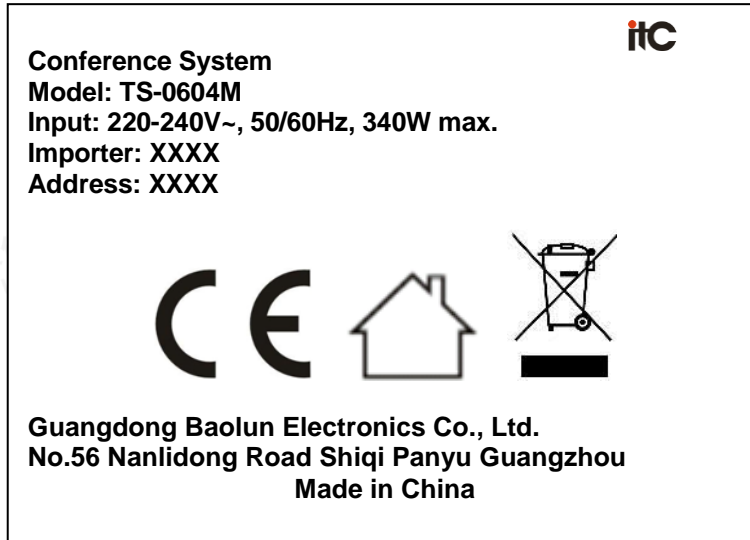

Notes:

1. The height dimension of CE symbol should not less than 5mm, the height dimension of WEEE symbol should not less than 7mm.
2. The model no. on above marking plate may be replaced by other ones listed in the report.





Test item particulars:

Product group: end product built-in component

Classification of use by: Ordinary person
 Instructed person
 Skilled person
 Children likely to be present

Supply connection.....: AC Mains DC Mains
 External Circuit - not Mains connected
- ES1 ES2 ES3

Supply tolerance: +10%/-10%
 +20%/-15%
 + ___ %/ - ___ %
 None

Supply connection – type: pluggable equipment type A -
 non-detachable supply cord
 appliance coupler
 direct plug-in
 pluggable equipment type B -
 non-detachable supply cord
 appliance coupler
 permanent connection
 mating connector other:

Considered current rating of protective device.....: 16A
location: building; equipment; N/A

Equipment mobility: movable hand-held transportable
 direct plug-in stationary for building-in
 wall/ceiling-mounted SRME/rack-mounted
 other:

Overvoltage category (OVC): OVC I OVC II OVC III
 OVC IV other:

Class of equipment: Class I Class II Class III
 Not classified

Special installation location: N/A restricted access area
 outdoor location

Pollution degree (PD): PD 1 PD 2 PD 3

Manufacturer’s specified T_{ma}.....: 40 °C Outdoor: minimum °C

IP protection class: IPX0 IP__

Power systems: TN TT IT - ___ V_{L-L}
 not AC mains

Altitude during operation (m): 2000 m or less _____ m

Altitude of test laboratory (m): 500 m or less _____ m

Mass of equipment (kg): 5.680kg





| | |
|--|--|
| Possible test case verdicts: | |
| - test case does not apply to the test object.....: N/A | |
| - test object does meet the requirement.....: P (Pass) | |
| - test object does not meet the requirement.....: F (Fail) | |
| Testing: | |
| Date of receipt of test item: 2023-05-25 | |
| Date (s) of performance of tests: From 2023-05-25 to 2023-06-06 | |
| General remarks: | |
| <p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> <p>These marked "☆" test clauses are not within the scope of CNAS recognition.</p> <p>The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.</p> | |
| Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1: | |
| The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable |
| When differences exist; they shall be identified in the General product information section. | |
| Name and address of factory (ies): Guangdong Baolun Electronics Co., Ltd. No.56 Nanlidong Road Shiqi Panyu Guangzhou | |
| General product information and other remarks: | |
| <p>1. The product described in this report is a Conference System intended for use with information technology equipment.</p> <p>2. The specified Max. ambient temperature is 40°C.</p> <p>3. All models are identical to each other except for model name, unless otherwise specified, all tests are performed on model TS-0604M.</p> | |
| Model list: TS-0604M, TS-0200M, TS-W111, TS-W209, TS-W205, TS-0370HY, TH-0512, TH-0700HC, TH-0501, TH-0501A, TH-0510, TH-0511, TH-0595, TH-10L, TH-0521, TH-0522, TH-0580, TH-0591A, TH-0700HY, TH-0734, TH-0597, TH-0590M, TH-0591, TH-0700HS, TH-0733, TH-0900, TH-0735, TH-0732, TH-0700H, TH-0802, TH-0802A, TH-0824, TH-0802ME, TH-0791, TH-0792, TH-0804A, TH-0805, TH-0805A, TH-0803, TH-0801, TH-0793, TH-0807A, TH-0808, TH-0808A, TH-0806, TH-0803A, TH-0801A, TH-0822A, TH-0823, TH-0700HD, TH-0809, TH-0806A, TH-0804, TH-0904, TH-0903, TS-0695, TH-0821, TH-0809A, TH-0807, TH-15T, TH-13, TS-05L, TH-0901, TH-0821A, TH-0822, TH-2, TH-8DH, TS-8C, TH-20L, TH-0902, TH-0900R, TH-9000S, TR-0630W, TH-0802M, TH-9000M, TH-50L, TH-100L, TR-0600W, TR-0849, TH-0500M, TR-0600C, TR-0840, TR-0840SW1, TR-0840SW2, TS-0200M-32, TH-0520, TR-0600M, TR-0846A, TR-0842, TR-0845, TS-0200MX, TS-0604ME, TR-0630C, TS-0200MC-64, TS-0200MC, TS- | |





0203A-64, TS-0310, TS-0670HS, TR-0630D, TS-0200ME, TS-0370HD, TS-6200B, TS-W100, TH-0596, TR-0630P, TS-0370HS, TS-0203-64, TS-0206A-32, TS-0370H-8, TS-0200ML, TR-0830B, TS-0308A, TS-0309, TS-0309A, TS-02L, TS-0310A, TR-0840A, TS-0203A-32, TS-0206-32, TS-0205DA, TS-0565, TS-02RD, TR-0846, TS-0204A-64, TS-0205D, TF-0100W, TS-0602A, TS-0625A, TS-0200M-64, TS-0206A, TS-0211, TS-0240, TS-0623A, TS-20D, TS-0200MM, TS-0306EA, TS-0210F, TS-0564, TS-0625, TS-P840, TS-W305A, TS-0304A, TS-0308, TS-05T, TS-0670HD, TS-0200MB, TS-0203-32, TS-0306E, TS-0221, TS-0623, TS-0670HY, TH-0820, TS-0204-32, TS-0560M, TS-0250, TS-0624A, TS-0670HY-64, TH-0823A, TS-0204-64, TS-0566, TS-02T, TS-0628A, TS-0682, TS-0306A, TS-0206, TS-0604MB, TS-0561, TS-0670HY-32, TS-0698, TS-0562, TS-0210, TS-0605M, TS-W304, TS-0681, TS-205, TS-235, TS-0212B, TS-0621A, TS-0621T, TS-0692, TS-231, TS-8202, TS-0223A, TS-0626A, TS-0624, TS-0811, TS-7C, TS-8403A, TS-0230A, TS-0690, TS-0628, TS-100L, TS-8201, TR-0830, TS-0303A, TS-20L, TS-0670H, TS-8308, TS-8201A, TR-0841, TS-0563, TS-830, TS-0670HD-16, TS-8404B, TS-8202A, TS-0200MC-32, TS-05D, TS-8403G, TS-0670HD-8, TS-8C120, TS-8409, TS-0206A-64, TS-0621, TS-8T, TS-0691, TS-8K, TS-8410, TS-0204A-32, TS-0626, TS-920, TS-0699, TS-930, TS-8430, TS-0206-64, TS-0627A, TS-F0212AS, TS-50L, TS-0303E, TS-8G, TS-8304B1, TS-0670HC, TS-0306, TS-548MV, TS-0305GA, TS-F101T, TS-8304B2, TS-0693, TS-F173T, TS-8210, TS-F184KT, TS-F133T, TS-9110, TS-10L, TS-F185MT, TS-8304A, TS-FE185T, TS-F156MT, TS-W304A, TS-50D, TS-F185T, TS-835, TS-0300MA, TS-F156T, TS-0250A, TS-8300, TS-F215T, TS-8404A, TS-0305DA, TS-F173MT, TS-0300M, TS-8402, TS-FC156MT, TS-8405, TS-0300MX, TS-FE173MT, TS-0303, TS-8403, TS-FC156T, TS-8407, TS-0305G, TS-FE173T, TS-0300MD, TS-8403B, TS-FE156MT, TS-8413, TS-0303EA, TS-P460, TS-0305D, TS-8411, TS-FZ156T, TS-8420, TS-FZ215T, TS-W109, TS-0202DA, TS-8412, TS-FZK156T, TS-8S, TS-FZK173T, TS-116, TS-F0212AB, TS-8M, TS-0236D, TS-0236E, TS-FZK215T, TS-W180, TS-0202D, TS-FE185MT, TS-0305, TS-F1107T, TS-P440, TS-0300ME, TS-W104, TS-P880C, TS-W113, TS-W112, TS-W150, TS-0305A, TS-W203, TS-8200, TS-6200M, TS-8200B, TS-6200A, TS-8200A, TS-6221M, TF-8830, TF-HY36170, TF-M03300, TF-H36178, TS-0370HC, T-A1.8, TS-0300M (JW), TS-0204, TS-W101S, TS-0303B, TS-0603, TS-0220MD, TR-0840B, TS-0602S, TS-W301D, TS-0220MF, TS-0214, TR-0845B, TR-0845W, TR-0846B, TR-0846W, TR-0848, TR-0847B, TS-9104UHM, TS-9416UHM, TS-0370H-16, TZ-36210, TZ-8230, TZ-H36270Y, TZ-0400M, TP-05304B2, TP-05300B, TP-05308, TP-25300M, TP-310D, TP-350D, TF-93100, TF-93100R1, TF-93104, TF-93108, TC-W804IB1, TF-B193104, TC-D300M, TF-M03300, TC-600T, TF-T05100, TZ-07200T, TV-*****, TF-*****, TZ-*****, TP-*****, PM-*****, TS-*****, T-***** (*can represent the numbers 0-9, letters A-Z, a-z, symbols or blank space, representing different marketing areas; Does not affect product safety and electromagnetic compatibility)

This report is based on LCS report No.: LCSA051223138S004 to issue a new test report. The product is identical to the previous evaluated product with no tests added. and the following changed:

- Added one model TS-0370H-16.

History of Amendments

| Date of issued | Report No. | Comment | Revised By |
|----------------|------------------|--|------------|
| 2024-01-18 | LCSA01084133S | Original Test Report | Mona Tao |
| 2024-05-10 | LCSA01084133S001 | <p>Amendment 1 Report:</p> <p>This report replaces the report No. LCSA01084133S, and the original report is invalid:</p> <p>1. added models: TZ-36210, TZ-8230, TZ-H36270Y, TZ-0400M, TP-05304B2, TP-05300B, TP-05308, TP-25300M, TP-310D, TP-350D.</p> <p>After construction review and verification of electrical spacing, no</p> | Mona Tao |





| | | | |
|------------|------------------|--|----------|
| | | additional tests were considered necessary. | |
| 2024-05-15 | LCSA01084133S002 | <p>Amendment 2 Report:</p> <p>This report replaces the report No. LCSA01084133S001, and the original report is invalid:</p> <p>1. added models TF-93100, TF-93100R1, TF-93104, TF-93108, TC-W804IB1, TF-B193104, TC-D300M, TF-M03300, TC-600T, TF-T05100, TZ-07200T.</p> <p>After construction review and verification of electrical spacing, no additional tests were considered necessary.</p> | Mona Tao |
| 2024-08-12 | LCSA01084133S003 | <p>Amendment 2 Report:</p> <p>This report replaces the report No. LCSA01084133S002, and the original report is invalid:</p> <p>1. Added models TV-***** , TF-***** , TZ-***** , TP-***** , PM-***** , TS-***** , T-***** (*can represent the numbers 0-9, letters A-Z, a-z, symbols or blank space, representing different marketing areas; Does not affect product safety and electromagnetic compatibility).</p> <p>2. Changed name and address of factory.</p> <p>After construction review and verification of electrical spacing, no additional tests were considered necessary.</p> | Mona Tao |





| OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS | | | | |
|---|---------------------------------------|------------|---------------------|--|
| Clause | Possible Hazard | | | |
| 5 | Electrically-caused injury | | | |
| Class and Energy Source (e.g. ES3: Primary circuit) | Body Part (e.g. Ordinary) | Safeguards | | |
| | | B | S | R |
| ES3: All primary circuits | Ordinary | N/A | N/A | Enclosure See 5.4.2, 5.4.3, 5.4.5, 5.5.3, 5.5.4 |
| ES1: Secondary circuit after transformer output | Ordinary | N/A | N/A | N/A |
| 6 | Electrically-caused fire | | | |
| Class and Energy Source (e.g. PS2: 100 Watt circuit) | Material part (e.g. Printed board) | Safeguards | | |
| | | B | 1 st S | 2 nd S |
| PS3 circuit | Enclosure | See 6.3 | V-0 | N/A |
| PS3 circuit | PCB | See 6.3 | V-1 | N/A |
| PS2/PS3 circuit | External/Internal wiring | See 6.5 | N/A | N/A |
| PS2/PS3 circuit | The other components/materials | See 6.3 | See 6.4.5, 6.4.6 | N/A |
| 7 | Injury caused by hazardous substances | | | |
| Class and Energy Source (e.g. Ozone) | Body Part (e.g., Skilled) | Safeguards | | |
| | | B | S | R |
| N/A | N/A | N/A | N/A | N/A |
| 8 | Mechanically-caused injury | | | |
| Class and Energy Source (e.g. MS3: Plastic fan blades) | Body Part (e.g. Ordinary) | Safeguards | | |
| | | B | S | R |
| MS1: Edges and corners of enclosure | Ordinary | N/A | N/A | N/A |
| MS2: Mass of the unit | Ordinary | N/A | N/A | N/A |
| 9 | Thermal burn | | | |
| Class and Energy Source (e.g. TS1: Keyboard caps) | Body Part (e.g., Ordinary) | Safeguards | | |
| | | B | S | R |
| TS3: Internal Parts/circuit of the unit in enclosure | Ordinary | N/A | N/A | Enclosure |
| TS1: Accessible part of external enclosure surfaces | Ordinary | N/A | N/A | N/A |
| 10 | Radiation | | | |
| Class and Energy Source (e.g. RS1: PMP sound output) | Body Part (e.g., Ordinary) | Safeguards | | |
| | | B | S | R |





| | | | | |
|--|----------|-----|-----|-----|
| RS1: LED indicator | Ordinary | N/A | N/A | N/A |
| Supplementary Information: | | | | |
| "B" – Basic Safeguard; "S" – Supplementary Safeguard; "R" – Reinforced Safeguard | | | | |

| ENERGY SOURCE DIAGRAM |
|--|
| <p>Optional. Manufacturers are to provide the energy sources diagram identify declared energy sources and identifying the demarcations are between power sources. Recommend diagram be provided included in power supply and multipart systems.</p> <p>Insert diagram below. Example diagram designs are; Block diagrams; image(s) with layered data; mechanical drawings</p> <p>Refer to ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE FOR DETAIL.</p> <p style="text-align: center;"> <input checked="" type="checkbox"/> ES <input checked="" type="checkbox"/> PS <input checked="" type="checkbox"/> MS <input checked="" type="checkbox"/> TS <input checked="" type="checkbox"/> RS </p> |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|----------|--|--|---------|
| 4 | GENERAL REQUIREMENTS | | P |
| 4.1.1 | Acceptance of materials, components and subassemblies | See appended table 4.1.2 | P |
| 4.1.2 | Use of components | Components which are certified to IEC and/or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment. See also Annex G | P |
| 4.1.3 | Equipment design and construction | Evaluation of safeguards regarding access to ES3 and to limiting the outputs to fulfill ES1, and protection in regard to risk of spread of fire, mechanical-caused injury and thermal burn considered. | P |
| 4.1.4 | Specified ambient temperature for outdoor use (°C): | This equipment is not intended to use in outdoor. | N/A |
| 4.1.5 | Constructions and components not specifically covered | No this constructions and components. | N/A |
| 4.1.8 | Liquids and liquid filled components (LFC) | No this component. | N/A |
| 4.1.15 | Markings and instructions | (See Annex F) | P |
| 4.4.3 | Safeguard robustness | See below | P |
| 4.4.3.1 | General | | P |
| 4.4.3.2 | Steady force tests | (See Annex T.2, T.5) | P |
| 4.4.3.3 | Drop tests | | N/A |
| 4.4.3.4 | Impact tests | (See Annex T.6) | P |
| 4.4.3.5 | Internal accessible safeguard tests | The external enclosure cannot be opened without damaging the product. | N/A |
| 4.4.3.6 | Glass impact tests | No such glass used. | N/A |
| 4.4.3.7 | Glass fixation tests | No such glass used. | N/A |
| | Glass impact test (1J) | | N/A |
| | Push/pull test (10 N) | | N/A |
| 4.4.3.8 | Thermoplastic material tests | | N/A |
| 4.4.3.9 | Air comprising a safeguard | (See Annex T) | P |
| 4.4.3.10 | Accessibility, glass, safeguard effectiveness | After tests of 4.4.3.2, 4.4.3.3, 4.4.3.8, no safeguard damaged. | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| EN 62368-1 | | | |
|-------------|--|---|------------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 4.4.4 | Displacement of a safeguard by an insulating liquid | No this insulating liquid. | N/A |
| 4.4.5 | Safety interlocks | No this safety interlocks. | N/A |
| 4.5 | Explosion | | P |
| 4.5.1 | General | No explosion occurs during normal/abnormal operation and single fault conditions | P |
| 4.5.2 | No explosion during normal/abnormal operating condition | (See Clause B.2, B.3) | P |
| | No harm by explosion during single fault conditions | (See Clause B.4) | P |
| 4.6 | Fixing of conductors | | P |
| | Fix conductors not to defeat a safeguard | The wires are secured by soldering and glue so that a loosening of the terminal connection is unlikely. | P |
| | Compliance is checked by test | (See Clause T.2) | P |
| 4.7 | Equipment for direct insertion into mains socket-outlets | | N/A |
| 4.7.2 | Mains plug part complies with relevant standard .. : | | N/A |
| 4.7.3 | Torque (Nm) | | N/A |
| 4.8 | Equipment containing coin/button cell batteries | | P |
| 4.8.1 | General | Coin cell battery that are soldered in place | P |
| 4.8.2 | Instructional safeguard | | N/A |
| 4.8.3 | Battery compartment door/cover construction | | N/A |
| | Open torque test | | N/A |
| 4.8.4.2 | Stress relief test | | N/A |
| 4.8.4.3 | Battery replacement test | | N/A |
| 4.8.4.4 | Drop test | | N/A |
| 4.8.4.5 | Impact test | | N/A |
| 4.8.4.6 | Crush test | | N/A |
| 4.8.5 | Compliance | | N/A |
| | 30N force test with test probe | | N/A |
| | 20N force test with test hook | | N/A |
| 4.9 | Likelihood of fire or shock due to entry of conductive object | | P |
| 4.10 | Component requirements | | P |
| 4.10.1 | Disconnect Device | (See Annex L) | P |
| 4.10.2 | Switches and relays | No this components used | N/A |





| EN 62368-1 | | | |
|------------|---|---|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5 | ELECTRICALLY-CAUSED INJURY | | P |
| 5.2 | Classification and limits of electrical energy sources | | P |
| 5.2.2 | ES1, ES2 and ES3 limits | | P |
| 5.2.2.2 | Steady-state voltage and current limits | (See appended table 5.2) | P |
| 5.2.2.3 | Capacitance limits | | P |
| 5.2.2.4 | Single pulse limits | No such single pulses generated in the EUT or applied to it. | N/A |
| 5.2.2.5 | Limits for repetitive pulses | No such repetitive pulses within the EUT | N/A |
| 5.2.2.6 | Ringing signals | No such ringing signals within the EUT | N/A |
| 5.2.2.7 | Audio signals | No such audio signals | N/A |
| 5.3 | Protection against electrical energy sources | | P |
| 5.3.1 | General Requirements for accessible parts to ordinary, instructed and skilled persons | See only 4.3 and 5.3 to 5.5 which applies to protection between the accessible parts and hazardous parts of other circuits. | P |
| 5.3.1 a) | Accessible ES1/ES2 derived from ES2/ES3 circuits | Accessible ES1 derived from ES3 circuits by double safeguard or reinforced safeguard, and the current or voltage levels complied with ES1 limits. | P |
| 5.3.1 b) | Skilled persons not unintentional contact ES3 bare conductors | | N/A |
| 5.3.2.1 | Accessibility to electrical energy sources and safeguards | Only ES1 circuit and the enclosure (safeguard) are accessed to person. | P |
| | Accessibility to outdoor equipment bare parts | | N/A |
| 5.3.2.2 | Contact requirements | No openings allowing entry of a probe. No access with test probe to any ES3 circuit or parts. | P |
| | Test with test probe from Annex V | | — |
| 5.3.2.2 a) | Air gap – electric strength test potential (V) | | N/A |
| 5.3.2.2 b) | Air gap – distance (mm) | | N/A |
| 5.3.2.3 | Compliance | | P |
| 5.3.2.4 | Terminals for connecting stripped wire | No such terminals. | N/A |
| 5.4 | Insulation materials and requirements | | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|---|--|---------|
| 5.4.1.2 | Properties of insulating material | The choice and application have taken into account as specified in this Clause 5 and Annex T and natural rubber, hygroscopic materials or asbestos are not used as insulation. | P |
| 5.4.1.3 | Material is non-hygroscopic | No hygroscopic material used. | N/A |
| 5.4.1.4 | Maximum operating temperature for insulating materials | (See appended table 5.4.1.4) | P |
| 5.4.1.5 | Pollution degrees | 2 | P |
| 5.4.1.5.2 | Test for pollution degree 1 environment and for an insulating compound | Pollution degree 2 is applied. No insulating compound applied (however see 5.5.4). | N/A |
| 5.4.1.5.3 | Thermal cycling test | See above | N/A |
| 5.4.1.6 | Insulation in transformers with varying dimensions | No such transformer within the EUT | N/A |
| 5.4.1.7 | Insulation in circuits generating starting pulses | No such starting pulses within the EUT | N/A |
| 5.4.1.8 | Determination of working voltage | (See appended table 5.4.1.8) | P |
| 5.4.1.9 | Insulating surfaces | See only 5.4.1.10.3 below. | P |
| 5.4.1.10 | Thermoplastic parts on which conductive metallic parts are directly mounted | | N/A |
| 5.4.1.10.2 | Vicat test..... | | N/A |
| 5.4.1.10.3 | Ball pressure test | | N/A |
| 5.4.2 | Clearances | The highest value in Cl 5.4.2.2 and Cl 5.4.2.3 be used. | P |
| 5.4.2.1 | General requirements | | P |
| | Clearances in circuits connected to AC Mains, Alternative method | | N/A |
| 5.4.2.2 | Procedure 1 for determining clearance | Temporary overvoltage 2000V _{peak} assumed. | P |
| | Temporary overvoltage | II | — |
| 5.4.2.3 | Procedure 2 for determining clearance | (See appended table 5.4.2, 5.4.3) | P |
| 5.4.2.3.2.2 | a.c. mains transient voltage | 2500 V _{pk} considered for Overvoltage Cat. II | — |
| 5.4.2.3.2.3 | d.c. mains transient voltage | No such transient | — |
| 5.4.2.3.2.4 | External circuit transient voltage..... | No such transient | — |
| 5.4.2.3.2.5 | Transient voltage determined by measurement | Transient voltages from an AC mains | — |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-----------|---|--|---------|
| 5.4.2.4 | Determining the adequacy of a clearance using an electric strength test | Using procedure 2 to determine the clearance according to 5.4.2.3. | N/A |
| 5.4.2.5 | Multiplication factors for clearances and test voltages | (See only appended tables) | P |
| 5.4.2.6 | Clearance measurement | (See appended table 5.4.2, 5.4.3) | P |
| 5.4.3 | Creepage distances | (See appended table 5.4.2, 5.4.3) | P |
| 5.4.3.1 | General | | P |
| 5.4.3.3 | Material group | IIIa&IIIb | — |
| 5.4.3.4 | Creepage distances measurement | (See appended table 5.4.2, 5.4.3) | P |
| 5.4.4 | Solid insulation | See below | P |
| 5.4.4.1 | General requirements | | P |
| 5.4.4.2 | Minimum distance through insulation | (See appended table 5.4.4.2) | P |
| 5.4.4.3 | Insulating compound forming solid insulation | No such insulation applied. | N/A |
| 5.4.4.4 | Solid insulation in semiconductor devices | Evaluated in approved Switching Power Supply | N/A |
| 5.4.4.5 | Insulating compound forming cemented joints | No such construction within the EUT. | N/A |
| 5.4.4.6 | Thin sheet material | Evaluated in approved Switching Power Supply | N/A |
| 5.4.4.6.1 | General requirements | | N/A |
| 5.4.4.6.2 | Separable thin sheet material | | N/A |
| | Number of layers (pcs) | | N/A |
| 5.4.4.6.3 | Non-separable thin sheet material | No such thin sheet material within the EUT | N/A |
| | Number of layers (pcs) | | N/A |
| 5.4.4.6.4 | Standard test procedure for non-separable thin sheet material | | N/A |
| 5.4.4.6.5 | Mandrel test | | N/A |
| 5.4.4.7 | Solid insulation in wound components | Evaluated in approved Switching Power Supply | N/A |
| 5.4.4.9 | Solid insulation at frequencies >30 kHz, E_p , K_R , d , V_{PW} (V) | See appended table 5.4.4.9 | P |
| | Alternative by electric strength test, tested voltage (V), K_R | | N/A |
| 5.4.5 | Antenna terminal insulation | | P |
| 5.4.5.1 | General | | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| EN 62368-1 | | | |
|------------|--|--|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5.4.5.2 | Voltage surge test | Surge test with 50 discharges at a maximum rate of 12/min from a 1 nF capacitor charged to 10 kV performed. | P |
| 5.4.5.3 | Insulation resistance (MΩ)..... : | Measured 500MΩ between mains supply to output terminals. | P |
| | Electric strength test : | (See appended table 5.4.9) | P |
| 5.4.6 | Insulation of internal wire as part of supplementary safeguard | No such insulation of internal wire as part of supplementary safeguard. | N/A |
| 5.4.7 | Tests for semiconductor components and for cemented joints | No tests necessary –see only 5.4.4.4. | N/A |
| 5.4.8 | Humidity conditioning | Test was performed on product with each source of transformer listed in table 4.1.2 | P |
| | Relative humidity (%), temperature (°C), duration (h) : | 95% R.H., 40°C, 120h | — |
| 5.4.9 | Electric strength test | | P |
| 5.4.9.1 | Test procedure for type test of solid insulation..... : | Compliance was checked immediately following temperature test in 5.4.1.4 and on a sample of the transformer raised to the relevant temperature as measured during that test. | P |
| 5.4.9.2 | Test procedure for routine test | No routine tests considered. To be considered during the relevant national approval. | N/A |
| 5.4.10 | Safeguards against transient voltages from external circuits | No such external circuits | N/A |
| 5.4.10.1 | Parts and circuits separated from external circuits | | N/A |
| 5.4.10.2 | Test methods | | N/A |
| 5.4.10.2.1 | General | | N/A |
| 5.4.10.2.2 | Impulse test : | | N/A |
| 5.4.10.2.3 | Steady-state test..... : | | N/A |
| 5.4.10.3 | Verification for insulation breakdown for impulse test : | | N/A |
| 5.4.11 | Separation between external circuits and earth | No such connections for external circuit applied within the EUT. | N/A |
| 5.4.11.1 | Exceptions to separation between external circuits and earth | No such connections to external circuit as above. | N/A |
| 5.4.11.2 | Requirements | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|---|--|----------|
| | SPDs bridge separation between external circuit and earth | | N/A |
| | Rated operating voltage U_{op} (V)..... : | | — |
| | Nominal voltage U_{peak} (V)..... : | | — |
| | Max increase due to variation ΔU_{sp} : | | — |
| | Max increase due to ageing ΔU_{sa} : | | — |
| 5.4.11.3 | Test method and compliance..... : | | N/A |
| 5.4.12 | Insulating liquid | No such insulating liquid. | N/A |
| 5.4.12.1 | General requirements | | N/A |
| 5.4.12.2 | Electric strength of an insulating liquid..... : | | N/A |
| 5.4.12.3 | Compatibility of an insulating liquid..... : | | N/A |
| 5.4.12.4 | Container for insulating liquid..... : | | N/A |
| 5.5 | Components as safeguards | | P |
| 5.5.1 | General | See below. | P |
| 5.5.2 | Capacitors and RC units | Approved Y1 type capacitor and X2 type capacitor provided. evaluated in approved Switching Power Supply. | P |
| 5.5.2.1 | General requirement | | P |
| 5.5.2.2 | Safeguards against capacitor discharge after disconnection of a connector..... : | (See table 5.5.2.2) | P |
| 5.5.3 | Transformers | Evaluated in approved Switching Power Supply | N/A |
| 5.5.4 | Optocouplers | Evaluated in approved Switching Power Supply | N/A |
| 5.5.5 | Relays | No such component provided | N/A |
| 5.5.6 | Resistors | | N/A |
| 5.5.7 | SPDs | No such component provided | N/A |
| 5.5.8 | Insulation between the mains and an external circuit consisting of a coaxial cable..... : | No such external circuits. | N/A |
| 5.5.9 | Safeguards for socket-outlets in outdoor equipment | No outdoor equipment | N/A |
| | RCD rated residual operating current (mA)..... : | | — |
| 5.6 | Protective conductor | | P |
| 5.6.2 | Requirement for protective conductors | | P |
| 5.6 | Protective conductor | | P |
| 5.6.2 | Requirement for protective conductors | | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| EN 62368-1 | | | |
|------------|---|---|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5.6.2.1 | General requirements | Earth terminal of AC input connector provided as protective earthing terminal. The internal green/yellow wire was connected to earth pin of metal enclosure by green/yellow wire, screw and spring washer. | P |
| 5.6.2.2 | Colour of insulation | Green/yellow wire used. | P |
| 5.6.3 | Requirement for protective earthing conductors | | P |
| | Protective earthing conductor size (mm ²) : | See appended table 4.1.2 for details. | — |
| | Protective earthing conductor serving as a reinforced safeguard | | N/A |
| | Protective earthing conductor serving as a double safeguard | | N/A |
| 5.6.4 | Requirements for protective bonding conductors | | N/A |
| 5.6.4.1 | Protective bonding conductors | | N/A |
| | Protective bonding conductor size (mm ²)..... : | | — |
| 5.6.4.2 | Protective current rating (A)..... : | | N/A |
| 5.6.5 | Terminals for protective conductors | Earth terminal of AC input connector provided as protective earthing terminal. | P |
| 5.6.5.1 | Terminal size for connecting protective earthing conductors (mm)..... : | | P |
| | Terminal size for connecting protective bonding conductors (mm) : | The test of 5.6.6 complied. Ground screw terminal: Φ 3.5mm | P |
| 5.6.5.2 | Corrosion | The internal metal enclosure is made of Aluminium alloy, screw spring washer are made of Nickel on steel, the combined electrochemical potential is below 0.6V. | P |
| 5.6.6 | Resistance of the protective bonding system | | P |
| 5.6.6.1 | Requirements | | P |
| 5.6.6.2 | Test Method..... : | | P |
| 5.6.6.3 | Resistance (Ω) or voltage drop..... : | (See appended table 5.6.6.2) | P |
| 5.6.7 | Reliable connection of a protective earthing conductor | | P |
| 5.6.8 | Functional earthing | | N/A |
| | Conductor size (mm ²)..... : | | N/A |
| | Class II with functional earthing marking : | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| EN 62368-1 | | | |
|------------|---|---|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Appliance inlet cl & cr (mm)..... : | | N/A |
| 5.7 | Prospective touch voltage, touch current and protective conductor current | | P |
| 5.7.2 | Measuring devices and networks | | P |
| 5.7.2.1 | Measurement of touch current | Figure 4 of IEC 60990:1999 was used in determining of the limit of ES1. (See appended table 5.2) | P |
| 5.7.2.2 | Measurement of voltage | | P |
| 5.7.3 | Equipment set-up, supply connections and earth connections | Clause 4, 5.3 and 5.4 of IEC 60990:1999 applied. | P |
| 5.7.4 | Unearthed accessible parts..... : | | N/A |
| 5.7.5 | Earthed accessible conductive parts..... : | (See appended table 5.7.5) | P |
| 5.7.6 | Requirements when touch current exceeds ES2 limits | | N/A |
| | Protective conductor current (mA)..... : | | N/A |
| | Instructional Safeguard..... : | | N/A |
| 5.7.7 | Prospective touch voltage and touch current associated with external circuits | No external circuits. | N/A |
| 5.7.7.1 | Touch current from coaxial cables | | N/A |
| 5.7.7.2 | Prospective touch voltage and touch current associated with paired conductor cables | | N/A |
| 5.7.8 | Summation of touch currents from external circuits | No external circuits. | N/A |
| | a) Equipment connected to earthed external circuits, current (mA)..... : | | N/A |
| | b) Equipment connected to unearthed external circuits, current (mA)..... : | | N/A |
| 5.8 | Backfeed safeguard in battery backed up supplies | | N/A |
| | Mains terminal ES..... : | No such battery backed up supplies | N/A |
| | Air gap (mm)..... : | | N/A |

| | | | |
|------------|--|---|---|
| 6 | ELECTRICALLY- CAUSED FIRE | | P |
| 6.2 | Classification of PS and PIS | | P |
| 6.2.2 | Power source circuit classifications..... : | PS (power source) classification determined by measuring the maximum power in Figures 34 and 35 for load and power source circuits. (See appended table 6.2.2) | P |
| 6.2.3 | Classification of potential ignition sources | See the following details. | P |





| EN 62368-1 | | | |
|------------|--|---|----------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 6.2.3.1 | Arcing PIS | (See appended table 6.2.3.1) | P |
| 6.2.3.2 | Resistive PIS | (See appended table 6.2.3.2) | P |
| 6.3 | Safeguards against fire under normal operating and abnormal operating conditions | | P |
| 6.3.1 | No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials | No ignition and no such temperature attained within the equipment. (See appended table B.1.5 and B.3) | P |
| | Combustible materials outside fire enclosure | No such materials | N/A |
| 6.4 | Safeguards against fire under single fault conditions | | P |
| 6.4.1 | Safeguard method | Method of "control of fire spread" is used. | P |
| 6.4.2 | Reduction of the likelihood of ignition under single fault conditions in PS1 circuits | No PS1 circuits. | N/A |
| 6.4.3 | Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits | Method by control of fire spread applied as 6.4.1. | N/A |
| 6.4.3.1 | Supplementary safeguards | | N/A |
| 6.4.3.2 | Single Fault Conditions | | N/A |
| | Special conditions for temperature limited by fuse | | N/A |
| 6.4.4 | Control of fire spread in PS1 circuits | | N/A |
| 6.4.5 | Control of fire spread in PS2 circuits | See below | P |
| 6.4.5.2 | Supplementary safeguards | Compliance detailed as follows: <ul style="list-style-type: none"> - <u>Printed board</u>: rated min. V-1 - <u>All other components</u>: at least V-2 except for parts mounted on min. V-1 material or small parts of combustible material (with mass less than 4g). | P |
| 6.4.6 | Control of fire spread in PS3 circuits | Compliance detailed as follows: <ul style="list-style-type: none"> - Parts as in 6.4.5 above; - Metal enclosure used. | P |
| 6.4.7 | Separation of combustible materials from a PIS | Metal enclosure used. | N/A |
| 6.4.7.2 | Separation by distance | | N/A |
| 6.4.7.3 | Separation by a fire barrier | No specific barrier provided. | N/A |
| 6.4.8 | Fire enclosures and fire barriers | Metal enclosure used. | P |
| 6.4.8.2 | Fire enclosure and fire barrier material properties | The metal material is used for the fire enclosure (overall enclosure). | P |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|--|---------|
| 6.4.8.2.1 | Requirements for a fire barrier | | N/A |
| 6.4.8.2.2 | Requirements for a fire enclosure | Metal enclosure used. | P |
| 6.4.8.3 | Constructional requirements for a fire enclosure and a fire barrier | See below | P |
| 6.4.8.3.1 | Fire enclosure and fire barrier openings | | P |
| 6.4.8.3.2 | Fire barrier dimensions | | N/A |
| 6.4.8.3.3 | Top openings and properties | | N/A |
| | Openings dimensions (mm)..... : | No openings. | N/A |
| 6.4.8.3.4 | Bottom openings and properties | | N/A |
| | Openings dimensions (mm)..... : | No openings. | N/A |
| | Flammability tests for the bottom of a fire enclosure | | N/A |
| | Instructional Safeguard..... : | | N/A |
| 6.4.8.3.5 | Side openings and properties | | P |
| | Openings dimensions (mm)..... : | 1*15mm | P |
| 6.4.8.3.6 | Integrity of a fire enclosure, condition met: a), b) or c)..... : | | N/A |
| 6.4.8.4 | Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating..... : | Metal enclosure used. | P |
| 6.4.9 | Flammability of insulating liquid..... : | | N/A |
| 6.5 | Internal and external wiring | | P |
| 6.5.1 | General requirements | Lead wires comply with UL 758, which has the equivalent requirement with IEC/TS 60695-11-21. | P |
| 6.5.2 | Requirements for interconnection to building wiring..... : | See appended table 4.1.2 | P |
| 6.5.3 | Internal wiring size (mm ²) for socket-outlets..... : | | N/A |
| 6.6 | Safeguards against fire due to the connection to additional equipment | | N/A |

| | | | |
|------------|--|--|-----|
| 7 | INJURY CAUSED BY HAZARDOUS SUBSTANCES | | N/A |
| 7.2 | Reduction of exposure to hazardous substances | | N/A |
| 7.3 | Ozone exposure | | N/A |
| 7.4 | Use of personal safeguards or personal protective equipment (PPE) | | N/A |
| | Personal safeguards and instructions..... : | | — |
| 7.5 | Use of instructional safeguards and instructions | | N/A |
| | Instructional safeguard (ISO 7010)..... : | | — |
| 7.6 | Batteries and their protection circuits | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|---|---|---------|
| 8 | MECHANICALLY-CAUSED INJURY | | P |
| 8.2 | Mechanical energy source classifications | | P |
| 8.3 | Safeguards against mechanical energy sources | | N/A |
| 8.4 | Safeguards against parts with sharp edges and corners | | P |
| 8.4.1 | Safeguards | | P |
| | Instructional Safeguard | MS2 for unit mass | P |
| 8.4.2 | Sharp edges or corners | Edges and corners of the enclosure are rounded. | P |
| 8.5 | Safeguards against moving parts | | P |
| 8.5.1 | Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts | MS1 | P |
| | MS2 or MS3 part required to be accessible for the function of the equipment | | N/A |
| | Moving MS3 parts only accessible to skilled person | | N/A |
| 8.5.2 | Instructional safeguard..... | | N/A |
| 8.5.4 | Special categories of equipment containing moving parts | | N/A |
| 8.5.4.1 | General | | N/A |
| 8.5.4.2 | Equipment containing work cells with MS3 parts | | N/A |
| 8.5.4.2.1 | Protection of persons in the work cell | | N/A |
| 8.5.4.2.2 | Access protection override | | N/A |
| 8.5.4.2.2.1 | Override system | | N/A |
| 8.5.4.2.2.2 | Visual indicator | | N/A |
| 8.5.4.2.3 | Emergency stop system | | N/A |
| | Maximum stopping distance from the point of activation (m)..... | | N/A |
| | Space between end point and nearest fixed mechanical part (mm) | | N/A |
| 8.5.4.2.4 | Endurance requirements | | N/A |
| | Mechanical system subjected to 100 000 cycles of operation | | N/A |
| | - Mechanical function check and visual inspection | | N/A |
| | - Cable assembly | | N/A |
| 8.5.4.3 | Equipment having electromechanical device for destruction of media | | N/A |
| 8.5.4.3.1 | Equipment safeguards | | N/A |
| 8.5.4.3.2 | Instructional safeguards against moving parts | | N/A |
| 8.5.4.3.3 | Disconnection from the supply | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|--|-----------------|------------|
| 8.5.4.3.4 | Cut type and test force (N).....: | | N/A |
| 8.5.4.3.5 | Compliance | | N/A |
| 8.5.5 | High pressure lamps | | N/A |
| | Explosion test.....: | | N/A |
| 8.5.5.3 | Glass particles dimensions (mm) | | N/A |
| 8.6 | Stability of equipment | | P |
| 8.6.1 | General | | P |
| | Instructional safeguard.....: | | N/A |
| 8.6.2 | Static stability | | N/A |
| 8.6.2.2 | Static stability test | | P |
| 8.6.2.3 | Downward force test | | N/A |
| 8.6.3 | Relocation stability | | N/A |
| | Wheels diameter (mm) | | — |
| | Tilt test | | N/A |
| 8.6.4 | Glass slide test | | N/A |
| 8.6.5 | Horizontal force test | | N/A |
| 8.7 | Equipment mounted to wall, ceiling or other structure | | N/A |
| 8.7.1 | Mount means type | | N/A |
| 8.7.2 | Test methods | | N/A |
| | Test 1, additional downwards force (N).....: | | N/A |
| | Test 2, number of attachment points and test force (N).....: | | N/A |
| | Test 3 Nominal diameter (mm) and applied torque (Nm).....: | | N/A |
| 8.8 | Handles strength | | N/A |
| 8.8.1 | General | | N/A |
| 8.8.2 | Handle strength test | | N/A |
| | Number of handles.....: | | — |
| | Force applied (N) | | — |
| 8.9 | Wheels or casters attachment requirements | | N/A |
| 8.9.2 | Pull test | | N/A |
| 8.10 | Carts, stands and similar carriers | | N/A |
| 8.10.1 | General | | N/A |
| 8.10.2 | Marking and instructions.....: | | N/A |
| 8.10.3 | Cart, stand or carrier loading test | | N/A |





| EN 62368-1 | | | |
|-------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Loading force applied (N) | | N/A |
| 8.10.4 | Cart, stand or carrier impact test | | N/A |
| 8.10.5 | Mechanical stability | | N/A |
| | Force applied (N) | | — |
| 8.10.6 | Thermoplastic temperature stability | | N/A |
| 8.11 | Mounting means for slide-rail mounted equipment (SRME) | | N/A |
| 8.11.1 | General | | N/A |
| 8.11.2 | Requirements for slide rails | | N/A |
| | Instructional Safeguard..... | | N/A |
| 8.11.3 | Mechanical strength test | | N/A |
| 8.11.3.1 | Downward force test, force (N) applied..... | | N/A |
| 8.11.3.2 | Lateral push force test | | N/A |
| 8.11.3.3 | Integrity of slide rail end stops | | N/A |
| 8.11.4 | Compliance | | N/A |
| 8.12 | Telescoping or rod antennas | | N/A |
| | Button/ball diameter (mm) | No such parts. | — |

| | | | |
|------------|---|---|-----|
| 9 | THERMAL BURN INJURY | | P |
| 9.2 | Thermal energy source classifications | | P |
| 9.3 | Touch temperature limits | | P |
| 9.3.1 | Touch temperatures of accessible parts | No part considered to be accessible other than enclosure and output cable. The equipment evaluated by temperature test (See appended table 5.4.1.4) | P |
| 9.3.2 | Test method and compliance | | P |
| 9.4 | Safeguards against thermal energy sources | | P |
| 9.5 | Requirements for safeguards | | P |
| 9.5.1 | Equipment safeguard | Enclosure provided to limit the transfer of thermal energy of internal parts under normal operating conditions and abnormal operating conditions. | P |
| 9.5.2 | Instructional safeguard..... | Instructional safeguard is not required. | N/A |
| 9.6 | Requirements for wireless power transmitters | | N/A |
| 9.6.1 | General | No wireless power transmitters. | N/A |





| EN 62368-1 | | | |
|------------|--------------------------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 9.6.2 | Specification of the foreign objects | | N/A |
| 9.6.3 | Test method and compliance | | N/A |

| | | | |
|-------------|---|--|-----|
| 10 | RADIATION | | P |
| 10.2 | Radiation energy source classification | | P |
| 10.2.1 | General classification | RS1: LED indicator | P |
| | Lasers | | — |
| | Lamps and lamp systems | | — |
| | Image projectors | | — |
| | X-Ray | | — |
| | Personal music player | | — |
| 10.3 | Safeguards against laser radiation | | N/A |
| | The standard(s) equipment containing laser(s) comply | | N/A |
| 10.4 | Safeguards against optical radiation from lamps and lamp systems (including LED types) | | N/A |
| 10.4.1 | General requirements | | N/A |
| | Instructional safeguard provided for accessible radiation level needs to exceed | | N/A |
| | Risk group marking and location | | N/A |
| | Information for safe operation and installation | | N/A |
| 10.4.2 | Requirements for enclosures | | N/A |
| | UV radiation exposure | | N/A |
| 10.4.3 | Instructional safeguard | | N/A |
| 10.5 | Safeguards against X-radiation | | N/A |
| 10.5.1 | Requirements | | N/A |
| | Instructional safeguard for skilled persons | No such x-radiation generated from the equipment | — |
| 10.5.3 | Maximum radiation (pA/kg)..... | | — |
| 10.6 | Safeguards against acoustic energy sources | | N/A |
| 10.6.1 | General | Not such equipment. | N/A |
| 10.6.2 | Classification | | N/A |
| | Acoustic output $L_{Aeq,T}$, dB(A)..... | | N/A |
| | Unweighted RMS output voltage (mV)..... | | N/A |
| | Digital output signal (dBFS) | | N/A |
| 10.6.3 | Requirements for dose-based systems | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| EN 62368-1 | | | |
|------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 10.6.3.1 | General requirements | | N/A |
| 10.6.3.2 | Dose-based warning and automatic decrease | | N/A |
| 10.6.3.3 | Exposure-based warning and requirements | | N/A |
| | 30 s integrated exposure level (MEL30) | | N/A |
| | Warning for MEL ≥ 100 dB(A) | | N/A |
| 10.6.4 | Measurement methods | | N/A |
| 10.6.5 | Protection of persons | | N/A |
| | Instructional safeguards | | N/A |
| 10.6.6 | Requirements for listening devices (headphones, earphones, etc.) | | N/A |
| 10.6.6.1 | Corded listening devices with analogue input | | N/A |
| | Listening device input voltage (mV)..... | | N/A |
| 10.6.6.2 | Corded listening devices with digital input | | N/A |
| | Max. acoustic output $L_{Aeq,T}$, dB(A) | | N/A |
| 10.6.6.3 | Cordless listening devices | | N/A |
| | Max. acoustic output $L_{Aeq,T}$, dB(A) | | N/A |

| | | | |
|------------|--|---|-----|
| B | NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS | | P |
| B.1 | General | | P |
| B.1.5 | Temperature measurement conditions | (See appended table B.1.5) | P |
| B.2 | Normal operating conditions | | P |
| B.2.1 | General requirements..... | (See summary of testing for tested models, each loaded according to its output ratings. See also appended table B.2.5.) | P |
| | Audio Amplifiers and equipment with audio amplifiers | Not such equipment. | N/A |
| B.2.3 | Supply voltage and tolerances | +10 % and -10 % considered. | P |
| B.2.5 | Input test | (See appended table B.2.5) | P |
| B.3 | Simulated abnormal operating conditions | | P |
| B.3.1 | General | (See appended table B.3) | P |
| B.3.2 | Covering of ventilation openings | | P |
| | Instructional safeguard | | N/A |
| B.3.3 | DC mains polarity test | The EUT is not connected to a D.C. mains | N/A |
| B.3.4 | Setting of voltage selector | No voltage selector was used. | N/A |
| B.3.5 | Maximum load at output terminals | (See appended table B.3) | P |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|---|---------|
| B.3.6 | Reverse battery polarity | No battery within the EUT | N/A |
| B.3.7 | Audio amplifier abnormal operating conditions | Not such equipment. | N/A |
| B.3.8 | Safeguards functional during and after abnormal operating conditions | All safeguards remained effective. | P |
| B.4 | Simulated single fault conditions | | P |
| B.4.1 | General | (See appended table B.4) | P |
| B.4.2 | Temperature controlling device | No such device used. | N/A |
| B.4.3 | Blocked motor test | DC fan used. | P |
| B.4.4 | Functional insulation | See below. | P |
| B.4.4.1 | Short circuit of clearances for functional insulation | (See appended table B.4) | P |
| B.4.4.2 | Short circuit of creepage distances for functional insulation | (See appended table B.4) | P |
| B.4.4.3 | Short circuit of functional insulation on coated printed boards | No coated printed boards used. | N/A |
| B.4.5 | Short-circuit and interruption of electrodes in tubes and semiconductors | (See appended table B.4 for faults on electronic components) | P |
| B.4.6 | Short circuit or disconnection of passive components | (See appended table B.4) | P |
| B.4.7 | Continuous operation of components | The EUT is continuous operating type and no such components intended for short time operation or intermittent operation | N/A |
| B.4.8 | Compliance during and after single fault conditions | (See appended table B.4) | P |
| B.4.9 | Battery charging and discharging under single fault conditions | No battery involved in the EUT | N/A |
| C | UV RADIATION | | N/A |
| C.1 | Protection of materials in equipment from UV radiation | | N/A |
| C.1.2 | Requirements | No UV generated from the equipment. | N/A |
| C.1.3 | Test method | | N/A |
| C.2 | UV light conditioning test | | N/A |
| C.2.1 | Test apparatus..... | | N/A |
| C.2.2 | Mounting of test samples | | N/A |
| C.2.3 | Carbon-arc light-exposure test | | N/A |
| C.2.4 | Xenon-arc light-exposure test | | N/A |
| D | TEST GENERATORS | | N/A |
| D.1 | Impulse test generators | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|---|--|---------|
| D.2 | Antenna interface test generator | | N/A |
| D.3 | Electronic pulse generator | | N/A |
| E | TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS | | N/A |
| E.1 | Electrical energy source classification for audio signals | | N/A |
| | Maximum non-clipped output power (W)..... : | Not such equipment. | — |
| | Rated load impedance (Ω) | | — |
| | Open-circuit output voltage (V)..... : | | — |
| | Instructional safeguard | | — |
| E.2 | Audio amplifier normal operating conditions | | N/A |
| | Audio signal source type | | — |
| | Audio output power (W)..... : | | — |
| | Audio output voltage (V) | | — |
| | Rated load impedance (Ω) | | — |
| | Requirements for temperature measurement | | N/A |
| E.3 | Audio amplifier abnormal operating conditions | | N/A |
| F | EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS | | P |
| F.1 | General | | P |
| | Language | English | — |
| F.2 | Letter symbols and graphical symbols | | P |
| F.2.1 | Letter symbols according to IEC60027-1 | Letter symbols for quantities and units are complied with IEC 60027-1. | P |
| F.2.2 | Graphic symbols according to IEC, ISO or manufacturer specific | Graphical symbols are complied with IEC 60417, ISO 3864-2, ISO 7000 or ISO 7010. | P |
| F.3 | Equipment markings | | P |
| F.3.1 | Equipment marking locations | The required marking is located on the enclosure of the equipment and is easily visible. | P |
| F.3.2 | Equipment identification markings | See copy of marking plate. | P |
| F.3.2.1 | Manufacturer identification | See copy of marking plate | P |
| F.3.2.2 | Model identification | See model list. | P |
| F.3.3 | Equipment rating markings | See the following details. | P |
| F.3.3.1 | Equipment with direct connection to mains | The equipment is direct connected to AC mains, see F.3.3.3 to F.3.3.6. | P |
| F.3.3.2 | Equipment without direct connection to mains | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-----------|---|---|---------|
| F.3.3.3 | Nature of the supply voltage..... : | See copy of marking plate | P |
| F.3.3.4 | Rated voltage : | See copy of marking plate | P |
| F.3.3.5 | Rated frequency : | See copy of marking plate | P |
| F.3.3.6 | Rated current or rated power..... : | See copy of marking plate | P |
| F.3.3.7 | Equipment with multiple supply connections | Only one mains supply connection provided. | N/A |
| F.3.4 | Voltage setting device | No voltage setting device. | N/A |
| F.3.5 | Terminals and operating devices | See below. | P |
| F.3.5.1 | Mains appliance outlet and socket-outlet markings : | No outlet used. | N/A |
| F.3.5.2 | Switch position identification marking..... : | No switch used. | N/A |
| F.3.5.3 | Replacement fuse identification and rating markings : | Evaluated in approved Switching Power Supply | P |
| | Instructional safeguards for neutral fuse : | | N/A |
| F.3.5.4 | Replacement battery identification marking : | No such battery on the equipment. | N/A |
| F.3.5.5 | Neutral conductor terminal | | N/A |
| F.3.5.6 | Terminal marking location | | N/A |
| F.3.6 | Equipment markings related to equipment classification | See below. | P |
| F.3.6.1 | Class I equipment | | P |
| F.3.6.1.1 | Protective earthing conductor terminal..... : | | P |
| F.3.6.1.2 | Protective bonding conductor terminals : | | N/A |
| F.3.6.2 | Equipment class marking : | Symbol IEC60417-5172 used. | P |
| F.3.6.3 | Functional earthing terminal marking : | | N/A |
| F.3.7 | Equipment IP rating marking : | IP X0 | P |
| F.3.8 | External power supply output marking : | See copy of marking plate | P |
| F.3.9 | Durability, legibility and permanence of marking | Marking is considered to be legible and easily discernible. See also the following details. | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|--|---------|
| F.3.10 | Test for permanence of markings | The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 sec. And then again for 15 sec, with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling and lifting of the label edge. After each test, the marking remained legible. | P |
| F.4 | Instructions | | P |
| | a) Information prior to installation and initial use | | P |
| | b) Equipment for use in locations where children not likely to be present | | N/A |
| | c) Instructions for installation and interconnection | | N/A |
| | d) Equipment intended for use only in restricted access area | | N/A |
| | e) Equipment intended to be fastened in place | | N/A |
| | f) Instructions for audio equipment terminals | | N/A |
| | g) Protective earthing used as a safeguard | | P |
| | h) Protective conductor current exceeding ES2 limits | | N/A |
| | i) Graphic symbols used on equipment | | N/A |
| | j) Permanently connected equipment not provided with all-pole mains switch | | N/A |
| | k) Replaceable components or modules providing safeguard function | | N/A |
| | l) Equipment containing insulating liquid | | N/A |
| | m) Installation instructions for outdoor equipment | | N/A |
| F.5 | Instructional safeguards | | P |
| G | COMPONENTS | | P |
| G.1 | Switches | | N/A |
| G.1.1 | General | | N/A |
| G.1.2 | Ratings, endurance, spacing, maximum load | | N/A |
| G.1.3 | Test method and compliance | | N/A |
| G.2 | Relays | | N/A |
| G.2.1 | Requirements | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|--|------------|
| G.2.2 | Overload test | | N/A |
| G.2.3 | Relay controlling connectors supplying power to other equipment | | N/A |
| G.2.4 | Test method and compliance | | N/A |
| G.3 | Protective devices | | P |
| G.3.1 | Thermal cut-offs | No thermal cut-off used. | N/A |
| | Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b) | | N/A |
| | Thermal cut-outs tested as part of the equipment as indicated in c) | | N/A |
| G.3.1.2 | Test method and compliance | | N/A |
| G.3.2 | Thermal links | No thermal link used. | N/A |
| G.3.2.1 | a) Thermal links tested separately according to IEC 60691 with specifics | | N/A |
| | b) Thermal links tested as part of the equipment | | N/A |
| G.3.2.2 | Test method and compliance | | N/A |
| G.3.3 | PTC thermistors | No PTC thermistor used. | N/A |
| G.3.4 | Overcurrent protection devices | Evaluated in approved Switching Power Supply | N/A |
| G.3.5 | Safeguards components not mentioned in G.3.1 to G.3.4 | | N/A |
| G.3.5.1 | Non-resettable devices suitably rated and marking provided | | N/A |
| G.3.5.2 | Single faults conditions..... : | | N/A |
| G.4 | Connectors | | P |
| G.4.1 | Spacings | | N/A |
| G.4.2 | Mains connector configuration : | Approved Appliance inlet used. | P |
| G.4.3 | Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely | Connectors for other functions with a shape that insertion into a mains connector or socket is unlikely to occur | P |
| G.5 | Wound components | | N/A |
| G.5.1 | Wire insulation in wound components | Evaluated in approved Switching Power Supply | N/A |
| G.5.1.2 | Protection against mechanical stress | | N/A |
| G.5.2 | Endurance test | | N/A |
| G.5.2.1 | General test requirements | | N/A |
| G.5.2.2 | Heat run test | | N/A |
| | Test time (days per cycle) : | | — |
| | Test temperature (°C)..... : | | — |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-----------|---|--|---------|
| G.5.2.3 | Wound components supplied from the mains | | N/A |
| G.5.2.4 | No insulation breakdown | | N/A |
| G.5.3 | Transformers | Evaluated in approved Switching Power Supply | N/A |
| G.5.3.1 | Compliance method..... : | | N/A |
| | Position | | N/A |
| | Method of protection..... : | | N/A |
| G.5.3.2 | Insulation | | N/A |
| | Protection from displacement of windings..... : | | — |
| G.5.3.3 | Transformer overload tests | | N/A |
| G.5.3.3.1 | Test conditions | | N/A |
| G.5.3.3.2 | Winding temperatures | | N/A |
| G.5.3.3.3 | Winding temperatures - alternative test method | | N/A |
| G.5.3.4 | Transformers using FIW | No FIW used. | N/A |
| G.5.3.4.1 | General | | N/A |
| | FIW wire nominal diameter..... : | | — |
| G.5.3.4.2 | Transformers with basic insulation only | | N/A |
| G.5.3.4.3 | Transformers with double insulation or reinforced insulation..... : | | N/A |
| G.5.3.4.4 | Transformers with FIW wound on metal or ferrite core | | N/A |
| G.5.3.4.5 | Thermal cycling test and compliance | | N/A |
| G.5.3.4.6 | Partial discharge test | | N/A |
| G.5.3.4.7 | Routine test | | N/A |
| G.5.4 | Motors | DC fan used. | P |
| G.5.4.1 | General requirements | | P |
| G.5.4.2 | Motor overload test conditions | | N/A |
| G.5.4.3 | Running overload test | | N/A |
| G.5.4.4.2 | Locked-rotor overload test | | N/A |
| | Test duration (days) | | — |
| G.5.4.5 | Running overload test for DC motors | | N/A |
| G.5.4.5.2 | Tested in the unit | | N/A |
| G.5.4.5.3 | Alternative method | | N/A |
| G.5.4.6 | Locked-rotor overload test for DC motors | | P |
| G.5.4.6.2 | Tested in the unit | | P |
| | Maximum Temperature | (See appended table B.4) | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|---|---|---------|
| G.5.4.6.3 | Alternative method | | N/A |
| G.5.4.7 | Motors with capacitors | | N/A |
| G.5.4.8 | Three-phase motors | | N/A |
| G.5.4.9 | Series motors | | N/A |
| | Operating voltage | | — |
| G.6 | Wire Insulation | | N/A |
| G.6.1 | General | Evaluated in approved Switching Power Supply | N/A |
| G.6.2 | Enamelled winding wire insulation | Insulation does not rely on solvent-based enamel. | N/A |
| G.7 | Mains supply cords | | N/A |
| G.7.1 | General requirements | | N/A |
| | Type..... | (See appended table 4.1.2) | — |
| G.7.2 | Cross sectional area (mm ² or AWG) | (See appended table 4.1.2) | N/A |
| G.7.3 | Cord anchorages and strain relief for non-detachable power supply cords | | N/A |
| G.7.3.2 | Cord strain relief | | N/A |
| G.7.3.2.1 | Requirements | | N/A |
| | Strain relief test force (N)..... | | N/A |
| G.7.3.2.2 | Strain relief mechanism failure | | N/A |
| G.7.3.2.3 | Cord sheath or jacket position, distance (mm) | | N/A |
| G.7.3.2.4 | Strain relief and cord anchorage material | | N/A |
| G.7.4 | Cord Entry | | N/A |
| G.7.5 | Non-detachable cord bend protection | | N/A |
| G.7.5.1 | Requirements | | N/A |
| G.7.5.2 | Test method and compliance | | N/A |
| | Overall diameter or minor overall dimension, <i>D</i> (mm) | | — |
| | Radius of curvature after test (mm) | | — |
| G.7.6 | Supply wiring space | | N/A |
| G.7.6.1 | General requirements | | N/A |
| G.7.6.2 | Stranded wire | | N/A |
| G.7.6.2.1 | Requirements | | N/A |
| G.7.6.2.2 | Test with 8 mm strand | | N/A |
| G.8 | Varistors | | N/A |
| G.8.1 | General requirements | Evaluated in approved Switching Power Supply | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|---|--|---------|
| G.8.2 | Safeguards against fire | | N/A |
| G.8.2.1 | General | | N/A |
| G.8.2.2 | Varistor overload test | | N/A |
| G.8.2.3 | Temporary overvoltage test | | N/A |
| G.9 | Integrated circuit (IC) current limiters | | N/A |
| G.9.1 | Requirements | No IC current limiter provided within the equipment. | N/A |
| | IC limiter output current (max. 5A) | | — |
| | Manufacturers' defined drift | | — |
| G.9.2 | Test Program | | N/A |
| G.9.3 | Compliance | | N/A |
| G.10 | Resistors | | N/A |
| G.10.1 | General | Resistor bridging functional insulation | N/A |
| G.10.2 | Conditioning | | N/A |
| G.10.3 | Resistor test | | N/A |
| G.10.4 | Voltage surge test | | N/A |
| G.10.5 | Impulse test | | N/A |
| G.10.6 | Overload test | | N/A |
| G.11 | Capacitors and RC units | | N/A |
| G.11.1 | General requirements | Evaluated in approved Switching Power Supply | N/A |
| G.11.2 | Conditioning of capacitors and RC units | | N/A |
| G.11.3 | Rules for selecting capacitors | | N/A |
| G.12 | Optocouplers | | N/A |
| | Optocouplers comply with IEC 60747-5-5 with specifics | Evaluated in approved Switching Power Supply | N/A |
| | Type test voltage $V_{ini,a}$ | | — |
| | Routine test voltage, $V_{ini,b}$ | | — |
| G.13 | Printed boards | | P |
| G.13.1 | General requirements | See the following details. | P |
| G.13.2 | Uncoated printed boards | The insulation between conductors on the outer surfaces of an uncoated printed board complied with the minimum clearance and creepage requirements | P |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|--|--|---------|
| G.13.3 | Coated printed boards | No coated printed board or multilayer board applied for within the equipment. | N/A |
| G.13.4 | Insulation between conductors on the same inner surface | | N/A |
| G.13.5 | Insulation between conductors on different surfaces | | N/A |
| | Distance through insulation : | | N/A |
| | Number of insulation layers (pcs) : | | — |
| G.13.6 | Tests on coated printed boards | | N/A |
| G.13.6.1 | Sample preparation and preliminary inspection | | N/A |
| G.13.6.2 | Test method and compliance | | N/A |
| G.14 | Coating on components terminals | | N/A |
| G.14.1 | Requirements : | No coating on component terminals considered to affect creepage or clearances. | N/A |
| G.15 | Pressurized liquid filled components | | N/A |
| G.15.1 | Requirements | No such device provided within the equipment. | N/A |
| G.15.2 | Test methods and compliance | | N/A |
| G.15.2.1 | Hydrostatic pressure test | | N/A |
| G.15.2.2 | Creep resistance test | | N/A |
| G.15.2.3 | Tubing and fittings compatibility test | | N/A |
| G.15.2.4 | Vibration test | | N/A |
| G.15.2.5 | Thermal cycling test | | N/A |
| G.15.2.6 | Force test | | N/A |
| G.15.3 | Compliance | | N/A |
| G.16 | IC including capacitor discharge function (ICX) | | N/A |
| G.16.1 | Condition for fault tested is not required | | N/A |
| | ICX with associated circuitry tested in equipment | | N/A |
| | ICX tested separately | | N/A |
| G.16.2 | Tests | | N/A |
| | Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test..... : | | — |
| | Mains voltage that impulses to be superimposed on : | | — |
| | Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test : | | — |
| G.16.3 | Capacitor discharge test..... : | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|----------------|--|---|---------|
| H | CRITERIA FOR TELEPHONE RINGING SIGNALS | | N/A |
| H.1 | General | | N/A |
| H.2 | Method A | | N/A |
| H.3 | Method B | | N/A |
| H.3.1 | Ringling signal | No telephone ringing signal generated within the equipment. | N/A |
| H.3.1.1 | Frequency (Hz) | | — |
| H.3.1.2 | Voltage (V) | | — |
| H.3.1.3 | Cadence; time (s) and voltage (V) | | — |
| H.3.1.4 | Single fault current (mA):..... | | — |
| H.3.2 | Tripping device and monitoring voltage | | N/A |
| H.3.2.1 | Conditions for use of a tripping device or a monitoring voltage | | N/A |
| H.3.2.2 | Tripping device | | N/A |
| H.3.2.3 | Monitoring voltage (V) | | N/A |
| J | INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION | | P |
| J.1 | General | | P |
| | Winding wire insulation | Triple insulated winding wiring used as reinforced safeguard in the isolating transformer that has been evaluated to Annex J of this standard (for wires providing Reinforced insulation). See Table 4.1.2. | — |
| | Solid round winding wire, diameter (mm) | | N/A |
| | Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm ²)..... | | N/A |
| J.2/J.3 | Tests and Manufacturing | (See separate test report) | — |
| K | SAFETY INTERLOCKS | | N/A |
| K.1 | General requirements | | N/A |
| | Instructional safeguard | No safety interlock provided. | N/A |
| K.2 | Components of safety interlock safeguard mechanism | | N/A |
| K.3 | Inadvertent change of operating mode | | N/A |
| K.4 | Interlock safeguard override | | N/A |
| K.5 | Fail-safe | | N/A |
| K.5.1 | Under single fault condition | | N/A |
| K.6 | Mechanically operated safety interlocks | | N/A |
| K.6.1 | Endurance requirement | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|---|---------|
| K.6.2 | Test method and compliance | | N/A |
| K.7 | Interlock circuit isolation | | N/A |
| K.7.1 | Separation distance for contact gaps & interlock circuit elements | | N/A |
| | In circuit connected to mains, separation distance for contact gaps (mm)..... | | N/A |
| | In circuit isolated from mains, separation distance for contact gaps (mm)..... | | N/A |
| | Electric strength test before and after the test of K.7.2 | | N/A |
| K.7.2 | Overload test, Current (A) | | N/A |
| K.7.3 | Endurance test | | N/A |
| K.7.4 | Electric strength test | | N/A |
| L | DISCONNECT DEVICES | | P |
| L.1 | General requirements | AC inlet used to disconnect from AC mains. | P |
| L.2 | Permanently connected equipment | Not permanently connected equipment. | N/A |
| L.3 | Parts that remain energized | When AC plug is disconnected no hazardous voltage in the equipment. | P |
| L.4 | Single-phase equipment | The mains plug disconnects both poles simultaneously. | P |
| L.5 | Three-phase equipment | | N/A |
| L.6 | Switches as disconnect devices | | N/A |
| L.7 | Plugs as disconnect devices | See above. | N/A |
| L.8 | Multiple power sources | Only one a.c. mains connection. | N/A |
| | Instructional safeguard | | N/A |
| M | EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS | | N/A |
| M.1 | General requirements | | N/A |
| M.2 | Safety of batteries and their cells | | N/A |
| M.2.1 | Batteries and their cells comply with relevant IEC standards | No battery used. | N/A |
| M.3 | Protection circuits for batteries provided within the equipment | | N/A |
| M.3.1 | Requirements | | N/A |
| M.3.2 | Test method | | N/A |
| | Overcharging of a rechargeable battery | | N/A |
| | Excessive discharging | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|-----------------|---------|
| | Unintentional charging of a non-rechargeable battery | | N/A |
| | Reverse charging of a rechargeable battery | | N/A |
| M.3.3 | Compliance | | N/A |
| M.4 | Additional safeguards for equipment containing a portable secondary lithium battery | | N/A |
| M.4.1 | General | | N/A |
| M.4.2 | Charging safeguards | | N/A |
| M.4.2.1 | Requirements | | N/A |
| M.4.2.2 | Compliance..... : | | N/A |
| M.4.3 | Fire enclosure..... : | | N/A |
| M.4.4 | Drop test of equipment containing a secondary lithium battery | | N/A |
| M.4.4.2 | Preparation and procedure for the drop test | | N/A |
| M.4.4.3 | Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%): : | | N/A |
| M.4.4.4 | Check of the charge/discharge function | | N/A |
| M.4.4.5 | Charge / discharge cycle test | | N/A |
| M.4.4.6 | Compliance | | N/A |
| M.5 | Risk of burn due to short-circuit during carrying | | N/A |
| M.5.1 | Requirement | | N/A |
| M.5.2 | Test method and compliance | | N/A |
| M.6 | Safeguards against short-circuits | | N/A |
| M.6.1 | External and internal faults | | N/A |
| M.6.2 | Compliance | | N/A |
| M.7 | Risk of explosion from lead acid and NiCd batteries | | N/A |
| M.7.1 | Ventilation preventing explosive gas concentration | | N/A |
| | Calculated hydrogen generation rate : | | N/A |
| M.7.2 | Test method and compliance | | N/A |
| | Minimum air flow rate, Q (m ³ /h)..... : | | N/A |
| M.7.3 | Ventilation tests | | N/A |
| M.7.3.1 | General | | N/A |
| M.7.3.2 | Ventilation test – alternative 1 | | N/A |
| | Hydrogen gas concentration (%)..... : | | N/A |
| M.7.3.3 | Ventilation test – alternative 2 | | N/A |
| | Obtained hydrogen generation rate..... : | | N/A |
| M.7.3.4 | Ventilation test – alternative 3 | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|---|------------------|---------|
| | Hydrogen gas concentration (%) | | N/A |
| M.7.4 | Marking | | N/A |
| M.8 | Protection against internal ignition from external spark sources of batteries with aqueous electrolyte | | N/A |
| M.8.1 | General | | N/A |
| M.8.2 | Test method | | N/A |
| M.8.2.1 | General | | N/A |
| M.8.2.2 | Estimation of hypothetical volume V_2 (m ³ /s) | | — |
| M.8.2.3 | Correction factors | | — |
| M.8.2.4 | Calculation of distance d (mm) | | — |
| M.9 | Preventing electrolyte spillage | | N/A |
| M.9.1 | Protection from electrolyte spillage | | N/A |
| M.9.2 | Tray for preventing electrolyte spillage | | N/A |
| M.10 | Instructions to prevent reasonably foreseeable misuse | | P |
| | Instructional safeguard | | P |
| N | ELECTROCHEMICAL POTENTIALS | | N/A |
| | Material(s) used | | — |
| O | MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES | | N/A |
| | Value of X (mm) | | — |
| P | SAFEGUARDS AGAINST CONDUCTIVE OBJECTS | | P |
| P.1 | General | | P |
| P.2 | Safeguards against entry or consequences of entry of a foreign object | | P |
| P.2.1 | General | | P |
| P.2.2 | Safeguards against entry of a foreign object | | P |
| | Location and Dimensions (mm) | | — |
| P.2.3 | Safeguards against the consequences of entry of a foreign object | | N/A |
| P.2.3.1 | Safeguard requirements | | N/A |
| | The ES3 and PS3 keep-out volume in Figure P.3 not applicable to transportable equipment | | N/A |
| | Transportable equipment with metalized plastic parts | | N/A |
| P.2.3.2 | Consequence of entry test | | N/A |
| P.3 | Safeguards against spillage of internal liquids | | N/A |
| P.3.1 | General | No such liquids. | N/A |
| P.3.2 | Determination of spillage consequences | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|---|---|---------|
| P.3.3 | Spillage safeguards | | N/A |
| P.3.4 | Compliance | | N/A |
| P.4 | Metallized coatings and adhesives securing parts | | N/A |
| P.4.1 | General | No such construction. | N/A |
| P.4.2 | Tests | | N/A |
| | Conditioning, T _C (°C) | | — |
| | Duration (weeks) | | — |
| Q | CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING | | N/A |
| Q.1 | Limited power sources | | N/A |
| Q.1.1 | Requirements | | N/A |
| | a) Inherently limited output | | N/A |
| | b) Impedance limited output | | N/A |
| | c) Regulating network limited output | | N/A |
| | d) Overcurrent protective device limited output | | N/A |
| | e) IC current limiter complying with G.9 | | N/A |
| Q.1.2 | Test method and compliance | | N/A |
| | Current rating of overcurrent protective device (A) | | N/A |
| Q.2 | Test for external circuits – paired conductor cable | No such circuit for connection to the EUT | N/A |
| | Maximum output current (A) | | N/A |
| | Current limiting method | | — |
| R | LIMITED SHORT CIRCUIT TEST | | N/A |
| R.1 | General | | N/A |
| R.2 | Test setup | | N/A |
| | Overcurrent protective device for test | | — |
| R.3 | Test method | | N/A |
| | Cord/cable used for test | | — |
| R.4 | Compliance | | N/A |
| S | TESTS FOR RESISTANCE TO HEAT AND FIRE | | N/A |
| S.1 | Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W | | N/A |
| | Samples, material | | — |
| | Wall thickness (mm) | | — |
| | Conditioning (°C) | | — |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|--|--------------------------|---------|
| | Test flame according to IEC 60695-11-5 with conditions as set out | | N/A |
| | - Material not consumed completely | | N/A |
| | - Material extinguishes within 30s | | N/A |
| | - No burning of layer or wrapping tissue | | N/A |
| S.2 | Flammability test for fire enclosure and fire barrier integrity | | N/A |
| | Samples, material..... : | | — |
| | Wall thickness (mm)..... : | | — |
| | Conditioning (°C)..... : | | — |
| S.3 | Flammability test for the bottom of a fire enclosure | | N/A |
| S.3.1 | Mounting of samples | | N/A |
| S.3.2 | Test method and compliance | | N/A |
| | Mounting of samples..... : | | — |
| | Wall thickness (mm)..... : | | — |
| S.4 | Flammability classification of materials | | N/A |
| S.5 | Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W | | N/A |
| | Samples, material..... : | | — |
| | Wall thickness (mm)..... : | | — |
| | Conditioning (°C)..... : | | — |
| T | MECHANICAL STRENGTH TESTS | | P |
| T.1 | General | | P |
| T.2 | Steady force test, 10 N : | (See appended table T.2) | P |
| T.3 | Steady force test, 30 N : | No internal enclosure. | N/A |
| T.4 | Steady force test, 100 N : | | N/A |
| T.5 | Steady force test, 250 N : | (See appended table T.5) | P |
| T.6 | Enclosure impact test | (See appended table T.6) | P |
| | Fall test | | P |
| | Swing test | | N/A |
| T.7 | Drop test : | | N/A |
| T.8 | Stress relief test : | | N/A |
| T.9 | Glass Impact Test : | No glass used. | N/A |
| T.10 | Glass fragmentation test | | N/A |
| | Number of particles counted..... : | | N/A |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-------------|---|---|---------|
| T.11 | Test for telescoping or rod antennas | | N/A |
| | Torque value (Nm) | | N/A |
| U | MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION | | N/A |
| U.1 | General | | N/A |
| | Instructional safeguard : | | N/A |
| U.2 | Test method and compliance for non-intrinsically protected CRTs | | N/A |
| U.3 | Protective screen | | N/A |
| V | DETERMINATION OF ACCESSIBLE PARTS | | P |
| V.1 | Accessible parts of equipment | | P |
| V.1.1 | General | No access with test probes to any hazardous parts | P |
| V.1.2 | Surfaces and openings tested with jointed test probes | | P |
| V.1.3 | Openings tested with straight unjointed test probes | | N/A |
| V.1.4 | Plugs, jacks, connectors tested with blunt probe | | N/A |
| V.1.5 | Slot openings tested with wedge probe | | N/A |
| V.1.6 | Terminals tested with rigid test wire | | N/A |
| V.2 | Accessible part criterion | | N/A |
| X | ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS) | | N/A |
| | Clearance | (See appended table X) | N/A |
| Y | CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES | | N/A |
| Y.1 | General | | N/A |
| Y.2 | Resistance to UV radiation | | N/A |
| Y.3 | Resistance to corrosion | | N/A |
| Y.3 | Resistance to corrosion | | N/A |
| Y.3.1 | Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by | | N/A |
| Y.3.2 | Test apparatus | | N/A |
| Y.3.3 | Water – saturated sulphur dioxide atmosphere | | N/A |
| Y.3.4 | Test procedure | | N/A |
| Y.3.5 | Compliance | | N/A |
| Y.4 | Gaskets | | N/A |
| Y.4.1 | General | | N/A |
| Y.4.2 | Gasket tests | | N/A |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|------------|--|-----------------|---------|
| Y.4.3 | Tensile strength and elongation tests | | N/A |
| | Alternative test methods | | N/A |
| Y.4.4 | Compression test | | N/A |
| Y.4.5 | Oil resistance | | N/A |
| Y.4.6 | Securing means | (See Annex P.4) | N/A |
| Y.5 | Protection of equipment within an outdoor enclosure | | N/A |
| Y.5.1 | General | | N/A |
| Y.5.2 | Protection from moisture | | N/A |
| | Relevant tests of IEC 60529 or Y.5.3 | | N/A |
| Y.5.3 | Water spray test | | N/A |
| Y.5.4 | Protection from plants and vermin | | N/A |
| Y.5.5 | Protection from excessive dust | | N/A |
| Y.5.5.1 | General | | N/A |
| Y.5.5.2 | IP5X equipment | | N/A |
| Y.5.5.3 | IP6X equipment | | N/A |
| Y.6 | Mechanical strength of enclosures | | N/A |
| Y.6.1 | General | | N/A |
| Y.6.2 | Impact test | (See Table T.6) | N/A |





| | | | |
|------------|--------------------|-----------------|---------|
| EN 62368-1 | | | |
| Clause | Requirement + Test | Result - Remark | Verdict |

| 5.2 | | TABLE: Classification of electrical energy sources | | | | | P |
|----------------|--|--|------------|------------|--------------------|-------------------------------|----------|
| Supply Voltage | Location (e.g. circuit designation) | Test conditions | Parameters | | | | ES Class |
| | | | U (V) | I (mA) | Type ¹⁾ | Additional Info ²⁾ | |
| 264Va.c., 60Hz | Primary circuits supplied by a.c. mains supply | Normal | 264Vrms | -- | -- | 60Hz | ES3 |
| | | Abnormal | -- | -- | -- | -- | |
| | | Single fault | -- | -- | -- | -- | |
| 264Va.c., 60Hz | Secondary terminal to earth | Normal | -- | 0.384 mApk | -- | -- | ES1 |
| | | Abnormal: (See table B.3 for details) | -- | 0.384 mApk | -- | -- | |
| | | Single fault: (See table B.4 for details) | -- | 0.397 mApk | -- | -- | |
| 264Va.c., 60Hz | Metal enclosure to earth | Normal | -- | 1.32 mApk | -- | -- | ES1 |
| | | Abnormal: (See table B.3 for details) | -- | 1.32 mApk | -- | -- | |
| | | Single fault: (See table B.4 for details) | -- | 1.39 mApk | -- | -- | |

Supplementary information:

1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc.

2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.

| 5.4.1.8 | | TABLE: Working voltage measurement | | | N/A |
|----------|-----------------|------------------------------------|----------------|----------|-----|
| Location | RMS voltage (V) | Peak voltage (V) | Frequency (Hz) | Comments | |
| -- | -- | -- | -- | -- | |
| -- | -- | -- | -- | -- | |
| -- | -- | -- | -- | -- | |

Supplementary information:

Evaluated in approved Switching Power Supply

| 5.4.1.10.2 | | TABLE: Vicat softening temperature of thermoplastics | N/A |
|-------------|---|--|-----|
| Method..... | : | ISO 306 / B50 | — |





| EN 62368-1 | | | |
|------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| Object/ Part No./Material | Manufacturer/trademark | Thickness (mm) | T softening (°C) |
|----------------------------|------------------------|----------------|------------------|
| | | | |
| Supplementary information: | | | |
| | | | |

| 5.4.1.10.3 | TABLE: Ball pressure test of thermoplastics | | | | N/A |
|---|--|----------------|-----------------------|--------------------------|-----|
| Allowed impression diameter (mm) | | | | ≤ 2 mm | — |
| Object/Part No./Material | Manufacturer/trademark | Thickness (mm) | Test temperature (°C) | Impression diameter (mm) | |
| -- | -- | -- | -- | -- | |
| Supplementary information: | | | | | |
| The bobbin materials of transformer and filter are phenolic, no test is needed. No other parts applied. | | | | | |

| 5.4.2, 5.4.3 | TABLE: Minimum Clearances/Creepage distance | | | | | | | P |
|---|--|----------------------|--------------------------|-------------------|---------|------------------------|------------------|---------|
| Clearance (cl) and creepage distance (cr) at/of/between: | U _p (V) | U _{rms} (V) | Freq ¹⁾ (KHz) | Required cl (mm)* | cl (mm) | E.S. ²⁾ (V) | Required cr (mm) | cr (mm) |
| L to N of AC inlet (BI) | 420 | 250 | 0.06 | 2.3 | 10 | -- | 2.5 | 10 |
| L/N to PE of AC inlet (BI) | 420 | 250 | 0.06 | 2.3 | 5.0 | -- | 2.5 | 5.0 |
| L/N of AC inlet to metal enclosure (BI) | 420 | 250 | 0.06 | 2.3 | 10 | -- | 2.5 | 10 |
| Supplementary information: B=Basic insulation, R=Reinforced insulation | | | | | | | | |
| BI=Basic insulation, SI=Supplementary insulation, RI=Reinforced insulation. | | | | | | | | |
| Note 1: Only for frequency above 30 kHz | | | | | | | | |
| Note 2: See table 5.4.2.4 if this is based on electric strength test | | | | | | | | |
| Note 3: Provide Material Group | | | | | | | | |
| 1. The built-in power supply has been approved CE | | | | | | | | |
| 2. Unless otherwise specified, the worst conditions of Cl. & Cr. in above mentioned locations have been considered and listed. | | | | | | | | |
| 3. This equipment is intended to be operated under altitude up to 5000m, so the clearance is multiplied by the altitude correction factors (1.48, linear interpolation used). | | | | | | | | |

| 5.4.4.2 | TABLE: Minimum distance through insulation | | | | N/A |
|---|---|------------|-------------------|-------------------|-----|
| Distance through insulation (DTI) at/of | Peak voltage (V) | Insulation | Required DTI (mm) | Measured DTI (mm) | |
| -- | -- | -- | -- | -- | |





| EN 62368-1 | | | |
|------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| |
|----------------------------|
| Supplementary information: |
| |

| 5.4.4.9 | TABLE: Solid insulation at frequencies >30 kHz | | | | | N/A |
|---------------------|--|-----------------|-------|--------------------|------------|----------------|
| Insulation material | E_p | Frequency (kHz) | K_R | Thickness d (mm) | Insulation | V_{PW} (Vpk) |
| -- | -- | -- | -- | -- | -- | -- |

| |
|----------------------------|
| Supplementary information: |
| |

| 5.4.9 | TABLE: Electric strength tests | | | P |
|-------------------------------|--|------------------|--------------------|---|
| Test voltage applied between: | Voltage shape (Surge, Impulse, AC, DC, etc.) | Test voltage (V) | Breakdown Yes / No | |

| | | | |
|---|----|------|----|
| Basic/supplementary: | | | |
| Between L and N before Fuse (Fuse disconnected) | DC | 2500 | No |
| Between L/N and metal enclosure | DC | 2500 | No |

| | | | |
|---------------------------|----|------|----|
| Reinforced: | | | |
| L/N to secondary terminal | DC | 4000 | No |

Supplementary information:

Core of transformers T1 was considered as primary. Test after humidity treatment, heating test, and for unit primary to secondary, primary to plastic enclosure electric strength after each fault condition test. Tests were performed on product with each source listed in table 4.1.2.

The DC voltage source was performed on all testing once in forward and once in reverse.

| 5.5.2.2 | TABLE: Stored discharge on capacitors | | | | P |
|------------------|--|---|-----------------|------------------------|----------|
| Location | Supply voltage (V) | Operating and fault condition ¹⁾ | Switch position | Measured voltage (Vpk) | ES Class |
| Inlet pins (L-N) | 264V/60Hz | N | -- | 18 | ES1 |
| Inlet pins (L-N) | 264V/60Hz | S (Fuse opened) | -- | 40 | ES1 |

Supplementary information:

X-capacitors installed for testing: see approved power supply
 [X] bleeding resistor rating: see approved power supply
 [] ICX: Discharge IC:
 1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit
 See the power supply for details.





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| 5.6.6 | TABLE: Resistance of protective conductors and terminations | | | | P |
|--|---|----------------|------------------|----------------|---|
| Location | Test current (A) | Duration (min) | Voltage drop (V) | Resistance (Ω) | |
| The farthest metal enclosure to AC inlet protective earthing conductor | 32 | 2 | -- | 0.022 | |
| The farthest metal enclosure to AC inlet protective earthing conductor | 40 | 2 | -- | 0.023 | |
| Supplementary information: | | | | | |

| 5.7.4 | TABLE: Unearthed accessible parts | | | | | P |
|---|-----------------------------------|--------------------|--|--|------------|----------|
| Location | Operating and fault conditions | Supply Voltage (V) | Parameters | | | ES class |
| | | | Voltage (V _{rms} or V _{pk}) | Current (A _{rms} or A _{pk}) | Freq. (Hz) | |
| See the table 5.2 | -- | -- | -- | -- | -- | -- |
| Supplementary information: | | | | | | |
| Abbreviation: SC=Short circuit, OC=open circuit | | | | | | |

| 5.7.5 | TABLE: Earthed accessible conductive part | | | | P |
|---------------------------------|--|--------------------|---------|--|---|
| Supply voltage (V) | 264V | | | | — |
| Phase(s) | [X] Single Phase; [] Three Phase: [] Delta [] Wye | | | | |
| Power Distribution System | [X] TN [X] TT [] IT | | | | |
| Location | Fault Condition No in IEC 60990 clause 6.2.2 | Touch current (mA) | Comment | | |
| Metal enclosure to earth | -- | 1.32/ 1.39 | -- | | |
| Supplementary Information: | | | | | |

| 5.8 | TABLE: Backfeed safeguard in battery backed up supplies | | | | | N/A |
|---|---|-------------------------------|----------|--------------------------|-------------------|----------|
| Location | Supply voltage (V) | Operating and fault condition | Time (s) | Open-circuit voltage (V) | Touch current (A) | ES Class |
| | | | | | | |
| Supplementary information: | | | | | | |
| Abbreviation: SC= short circuit, OC= open circuit | | | | | | |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| 6.2.2 | TABLE: Power source circuit classifications | | | | | P |
|------------------------|---|-------------|-------------|------------------------------|----------|-------------------|
| Location | Operating and fault condition | Voltage (V) | Current (A) | Max. Power ¹⁾ (W) | Time (S) | PS class |
| Primary circuits | Normal operation | -- | -- | -- | 5s | PS3 (declaration) |
| Output of power supply | Normal operation | -- | -- | -- | 5s | PS3 (declaration) |

Supplementary information:
Abbreviation: SC= short circuit, OC= open circuit.
Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3.

| 6.2.3.1 | TABLE: Determination of Arcing PIS | | | | P |
|--|--------------------------------------|----------------------------|------------------|----------------------|---|
| Location | Open circuit voltage after 3 s (Vpk) | Measured r.m.s current (A) | Calculated value | Arcing PIS? Yes / No | |
| Primary circuits and secondary circuit / parts | -- | -- | -- | Yes (Declaration) | |

Supplementary information:
An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V_p) and normal operating condition rms current (I_{rms}) is greater than 15.
All conductors and devices are considered as PIS.

| 6.2.3.2 | TABLE: Determination of resistive PIS | | | P |
|----------------------------------|---------------------------------------|---------------------|----------------------|---|
| Location | Operating and fault condition | Dissipate power (W) | Arcing PIS? Yes / No | |
| All internal circuits/components | -- | -- | Yes (declaration) | |

Supplementary information:
Abbreviation: SC= short circuit; OC= open circuit
Considered resistive PIS in all primary and secondary circuit.
A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.
If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.
A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



| | | | |
|------------|--------------------|-----------------|---------|
| EN 62368-1 | | | |
| Clause | Requirement + Test | Result - Remark | Verdict |

| | | | | | |
|----------------------------|----------------------------------|------------------|-------------------------------------|---------------------------------------|-----|
| 8.5.5 | TABLE: High pressure lamp | | | | N/A |
| Lamp manufacturer | Lamp type | Explosion method | Longest axis of glass particle (mm) | Particle found beyond 1 m Yes / No | |
| Supplementary information: | | | | | |

| | | | | | | | | |
|---|--|--------------|----------------------------------|--------------|---------------------------------------|--------------|---------------------------------------|--------------|
| 9.6 | TABLE: Temperature measurements for wireless power transmitters | | | | | | | N/A |
| Supply voltage (V)..... : | | | | | | | — | |
| Max. transmit power of transmitter (W)..... : | | | | | | | — | |
| Foreign objects | w/o receiver and direct contact | | with receiver and direct contact | | with receiver and at distance of 2 mm | | with receiver and at distance of 5 mm | |
| | Object (°C) | Ambient (°C) | Object (°C) | Ambient (°C) | Object (°C) | Ambient (°C) | Object (°C) | Ambient (°C) |
| Supplementary information: | | | | | | | | |

| | | | | | |
|--|--|-------|--------------|-------|-------------------------------|
| 5.4.1.4, 9.3, B.1.5, B.2.6 | TABLE: Temperature measurements | | | | P |
| Supply voltage (VAC)..... : | 198Vac, 60Hz | | 264Vac, 50Hz | | — |
| Ambient temperature during test $T_{amb}(^{\circ}C)$ | -- | -- | -- | -- | — |
| Maximum measured temperature T of part/at: | $T (^{\circ}C)$ | | | | Allowed $T_{max} (^{\circ}C)$ |
| Appliance inlet | 39.8 | 54.8 | 36.2 | 51.2 | 70 |
| Switch | 45.9 | 60.9 | 43.2 | 58.2 | 70 |
| Input lead wire | 62.0 | 77.0 | 55.7 | 70.7 | 110 |
| Ground wire | 68.0 | 83.0 | 63.6 | 78.6 | 110 |
| Metal enclosure of power supply | 61.2 | 76.2 | 56.7 | 71.7 | 110 |
| T1 winding of power board 0300M | 88.8 | 103.8 | 85.2 | 100.2 | 110 |
| T1 core of power board 0300M | 85.6 | 100.6 | 81.8 | 96.8 | 110 |
| T2 winding of power board 0300M | 84.8 | 99.8 | 81.2 | 96.2 | 110 |
| T2 core of power board 0300M | 83.6 | 98.6 | 77.8 | 92.8 | 110 |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| | | | | | | | |
|---------------------------------|---------------------|--------------------|---------------------|--------------------|--------|-------------------------------|------------------|
| C230 body | 67.7 | 82.7 | 63.0 | 78.0 | 110 | | |
| C252 body | 70.1 | 85.1 | 66.5 | 81.5 | 110 | | |
| PCB near U4 | 75.3 | 90.3 | 72.7 | 87.7 | 110 | | |
| PCB near U2 | 75.9 | 90.9 | 72.0 | 87.0 | 110 | | |
| PCB near U30 | 71.6 | 86.6 | 68.3 | 83.3 | 110 | | |
| DC Fan | 48.9 | 63.9 | 44.7 | 59.7 | 130 | | |
| Metal enclosure inside near T1 | 52.2 | 67.2 | 48.1 | 63.1 | Ref. | | |
| Metal enclosure outside near T1 | 46.7 | -- | 42.9 | -- | 60 | | |
| Button | 32.7 | -- | 29.3 | -- | 77 | | |
| LCD surface | 33.4 | -- | 29.8 | -- | 71 | | |
| Ambient | 25.0 | Shift to 40.0 | 25.0 | Shift to 40.0 | -- | | |
| Temperature T of winding: | t ₁ (°C) | R ₁ (Ω) | t ₂ (°C) | R ₂ (Ω) | T (°C) | Allowed T _{max} (°C) | Insulation class |
| -- | -- | -- | -- | -- | -- | -- | -- |

Supplementary information:

* Temperature limit for TS1 of accessible enclosure according to Table 38.

Note 1: The apparatus was submitted and evaluated for maximum manufacturer's recommended ambient (T_{ma}) of 40°C.

Note 2: The temperatures were measured under the worst case normal mode defined in clause B.2.1.

Note 3: Temperature limits are calculated as follows:

Winding components providing safety isolation:

Class B → T_{max} = 120-10=110°C

| B.2.5 TABLE: Input test | | | | | | | | P |
|-------------------------|----|-------|-------------|-------|-------------|---------|------------|--|
| U (V) | Hz | I (A) | I rated (A) | P (W) | P rated (W) | Fuse No | I fuse (A) | Condition/status |
| 198 | 50 | 1.769 | -- | 278.0 | -- | F1 | 1.769 | Unit was normal operation with max normal load |
| 220 | 50 | 1.635 | -- | 277.8 | 340 | F1 | 1.635 | |
| 240 | 50 | 1.523 | -- | 277.3 | 340 | F1 | 1.523 | |
| 264 | 50 | 1.426 | -- | 277.5 | -- | F1 | 1.426 | |
| 198 | 60 | 1.771 | -- | 278.1 | -- | F1 | 1.771 | |
| 220 | 60 | 1.637 | -- | 277.9 | 340 | F1 | 1.637 | |
| 240 | 60 | 1.542 | -- | 277.4 | 340 | F1 | 1.542 | |
| 264 | 60 | 1.448 | -- | 277.7 | -- | F1 | 1.448 | |

Supplementary information:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

The maximum measured current under rated voltage did not exceed 110% of the rated current.

| B.3, B.4 | | TABLE: Abnormal operating and fault condition tests | | | | P |
|--|-----------|---|-----------------|----------|------------------|--|
| Ambient temperature T_{amb} (°C) | | | | | See below | — |
| Power source for EUT: Manufacturer, model/type, output rating..: | | | | | -- | — |
| Component No. | Condition | Supply voltage (Vac) | Test time | Fuse no. | Fuse current (A) | Observation |
| Ventilation | Blocked | 264 | 2 hrs 30mins | F1 | 1.448 | Unit was normal operation, no damaged, no hazardous. T1 winding of power board 0300M: 103.5°C; T1 core of power board 0300M: 100.3°C; Ambient: 40.0°C Metal enclosure outside near T1: 45.5°C; Ambient: 25.0°C |
| DC fan | Locked | 264 | 7 hrs | F1 | 1.453 | Unit was normal operation, no damaged, no hazardous. T1 winding of power board 0300M: 108.4°C; T1 core of power board 0300M: 103.7°C; DC Fan: 63.4°C; Ambient: 40.0°C Metal enclosure outside near T1: 46.2°C; Ambient: 25.0°C |
| C9 | SC | 264 | 10mins | -- | 0 | Unit shutdown. No damage, no hazardous. |
| U3 pin1-2 | SC | 264 | 10mins | -- | 0 | Unit shutdown. No damage, no hazardous. |

Supplementary information:

SC=Short circuit, OC=Open circuit; OL: Overload.

Test table is provided to record abnormal for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test. Specify if test condition by indicating "Single Fault" then the condition for Clause B.4.

- 1) The overloaded condition is applied according to annex G.5.3.3.
Winding Limit for Transformer: 175-10-(40-25.0)=155°C. Enclosure outside: TS2=87°C.
- 2) The test result shown all safeguards remained effective and didn't lead to a single fault condition during abnormal operating condition; In addition all safeguards complied with applicable requirements in this standard after restoration of normal operating conditions.
- 3) The test result showed no Class 1 or 2 energy source become Class 3 level during and after single fault condition.
- 4) The tests where fuse opened were repeated with each source of fuse and with same result observed.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

5) The tests where fusible resistor opened were repeated 10 times with each source of fusible resistor and with same result observed, the short circuit current is < 35A. Also repeated with each source of fusible resistor and with same result observed.
 6) Output voltage measured under abnormal or Single fault conditions were not increase by more than 10% of its rated output voltage under normal operating condition.

| M.3 | TABLE: Protection circuits for batteries provided within the equipment | | | | | | | N/A |
|--|--|------------------------------------|-------------|------------------------|-------------------------|------------------------------|-------------|-----|
| Is it possible to install the battery in a reverse polarity position? | | | | | | No | — | |
| Equipment Specification | Charging | | | | | | | |
| | Voltage (V) | | | | Current (A) | | | |
| | -- | | | | -- | | | |
| Manufacturer/type | Battery specification | | | | | | | |
| | Non-rechargeable batteries | | | Rechargeable batteries | | | | |
| | Discharging current (A) | Unintentional charging current (A) | Charging | | Discharging current (A) | Reverse charging current (A) | | |
| | | | Voltage (V) | Current (A) | | | | |
| | -- | -- | -- | -- | -- | -- | | |
| -- | -- | -- | -- | -- | -- | | | |
| Note: The tests of M.3.2 are applicable only when above appropriate data is not available. | | | | | | | | |
| Specified battery temperature (°C) | | | | | | -- | | |
| Component No. | Fault condition | Charge/discharge mode | Test time | Temp. (°C) | Current (A) | Voltage (V) | Observation | |
| -- | -- | -- | -- | -- | -- | -- | -- | |
| Supplementary information: | | | | | | | | |
| Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal. | | | | | | | | |

| M.4.2 | TABLE: Charging safeguards for equipment containing a secondary lithium battery | | | | | | N/A |
|---|---|----------------------|----------------------|------------|-------------|--|-----|
| Maximum specified charging voltage (V) | | | | | | | — |
| Maximum specified charging current (A) | | | | | | | — |
| Highest specified charging temperature (°C) | | | | | | | |
| Lowest specified charging temperature (°C) | | | | | | | |
| Battery manufacturer/type | Operating and fault condition | Measurement | | | Observation | | |
| | | Charging voltage (V) | Charging current (A) | Temp. (°C) | | | |
| -- | -- | -- | -- | -- | -- | | |





EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature

| Q.1 | TABLE: Circuits intended for interconnection with building wiring (LPS) | | | | | | N/A |
|----------------|---|---------------------|----------|---------------------|-------|--------|-------|
| Output Circuit | Condition | U _{oc} (V) | Time (s) | I _{sc} (A) | | S (VA) | |
| | | | | Meas. | Limit | Meas. | Limit |
| -- | -- | -- | -- | -- | -- | -- | -- |
| -- | -- | -- | -- | -- | -- | -- | -- |

Supplementary Information:

Abbreviation: SC= short circuit, OC= open circuit.

* Unit shut-down immediately, recoverable, no hazard

| T.2, T.3, T.4, T.5 | TABLE: Steady force test | | | | | | P |
|----------------------|--------------------------|----------------|-------|-----------|-------------------|--|---|
| Location/Part | Material | Thickness (mm) | Probe | Force (N) | Test Duration (s) | Observation | |
| Enclosure top (T.5) | metal | 1) | -- | 250 | 5 | Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown. | |
| Enclosure side (T.5) | metal | 1) | -- | 250 | 5 | Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown. | |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an

District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



EN 62368-1

| Clause | Requirement + Test | Result - Remark | | | | Verdict |
|--|--------------------|-----------------|----|-----|---|--|
| Enclosure bottom (T.5) | metal | 1) | -- | 250 | 5 | Enclosure remained intact, no crack/ opening developed. Internal ES3, TS3 were not accessible after test. No insulation breakdown. |
| Internal components near the gap between primary and secondary (T.2) | -- | -- | -- | 10 | 5 | No insulation breakdown. No reduction the clearances and creepage distances |
| Supplementary information: | | | | | | |
| 1). See appended table 4.1.2. | | | | | | |

| T.6, T.9 | TABLE: Impact test | | | | P |
|-------------------------------|--------------------|----------------|-------------|---|---|
| Location/Part | Material | Thickness (mm) | Height (mm) | Observation | |
| Enclosure top (T.6) | metal | 1) | 1300 | After the test, enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown. | |
| Enclosure side (T.6) | metal | 1) | 1300 | After the test, enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown. | |
| Enclosure bottom (T.6) | metal | 1) | 1300 | After the test, enclosure remained intact, no cracking/opening developed in the enclosure joint. Internal ES3, TS3 were not accessible after test. No insulation breakdown. | |
| Supplementary information: | | | | | |
| 1). See appended table 4.1.2. | | | | | |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




| | | | |
|------------|--------------------|-----------------|---------|
| EN 62368-1 | | | |
| Clause | Requirement + Test | Result - Remark | Verdict |

| T.7 | TABLE: Drop test | | | | N/A |
|----------------------------|-------------------------|----------------|-------------|-------------|-----|
| Location/Part | Material | Thickness (mm) | Height (mm) | Observation | |
| -- | -- | -- | -- | -- | |
| Supplementary information: | | | | | |
| | | | | | |

| T.8 | TABLE: Stress relief test | | | | | N/A |
|----------------------------|----------------------------------|----------------|-----------------------|--------------|-------------|-----|
| Location/Part | Material | Thickness (mm) | Oven Temperature (°C) | Duration (h) | Observation | |
| -- | -- | -- | -- | -- | -- | |
| Supplementary information: | | | | | | |
| | | | | | | |

| X | TABLE: Alternative method for determining minimum clearances distances | | | | N/A |
|------------------------------|---|------------------|------------------|--|-----|
| Clearance distanced between: | Peak of working voltage (V) | Required cl (mm) | Measured cl (mm) | | |
| | | | | | |
| Supplementary information: | | | | | |
| | | | | | |

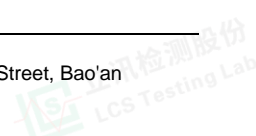



| 4.1.2 TABLE: Critical components information | | | | | P |
|--|---|-----------------|--|-------------------|-------------------------------------|
| Object / part No. | Manufacturer/ trademark | Type / model | Technical data | Standard | Mark(s) of conformity ¹⁾ |
| Plug | I-Sheng Electric Wire & Cable Co., Ltd. | SP-022 | AC 250 V, 16A | DIN VDE 0620-2-1 | VDE 40013526 |
| Power cord | I-Sheng Electric Wire & Cable Co., Ltd. | H03VV-F | 3 x 0,5 mm ² 3 x 0,75 mm ² | DIN EN 50525-2-11 | VDE 40015762 |
| Connector | I-Sheng Electric Wire & Cable Co., Ltd. | IS-14 | AC 250 V, 10A | IEC/EN 60320-1 | VDE 40037879 |
| Appliance inlet | LECI Electronics Co., Ltd | DB-14-2P | AC 250 V, 10A | IEC/EN 60320-1 | VDE 40032137 |
| Switch | LECI Electronics Co., Ltd | RS601 | AC 250 V, 13A | IEC/EN 61058-1 | VDE 40017430 |
| Metal enclosure | Interchangeable | Interchangeable | Metal, Min. thickness 1.2mm | IEC/EN 62368-1 | Tested with appliance |
| PCB (for all) | Walex Electronic (Wuxi) Co Ltd | T4 | V-0, 130°C | UL94, UL796 | UL E154355 |
| (Alternative) | Interchangeable | Interchangeable | Min. V-0, 130°C | UL94, UL796 | UL approved |
| Input lead wire and ground wire | SHENZHEN LINKOL WIRE & CABLE CO LTD | 1015 | VW-1, 105°C, Min. 300V, min. 16AWG | UL 758 | UL E320450 |
| (Alternative) | Interchangeable | Interchangeable | VW-1, 105°C, Min. 300V, min. 16AWG | UL 758 | UL approved |
| Internal wire (in secondary) | SHENZHEN LINKOL WIRE & CABLE CO LTD | 1007 | VW-1, Min. 80°C, Min. 300V, min. 24AWG | UL 758 | UL E320450 |
| (Alternative) | Interchangeable | Interchangeable | VW-1, Min. 80°C, Min. 300V, min. 24AWG | UL 758 | UL approved |
| DC fan | RUNDA | CHA5012BM-20B | DC12V, 0.18A | IEC/EN 62368-1 | Tested with appliance |
| Power Supply | Guangdong Baolun Electronics Co., Ltd. | ABS-350-36-A | Input: 100-120V~ 7A Max / 220-240V~ 4A Max 50/60Hz Output: 36VDC, 9.7A | IEC/EN 62368-1 | CE |
| Supplementary information: | | | | | |
| ¹⁾ Provided evidence ensures the agreed level of compliance. See OD-2039. | | | | | |





| EN 62368_1E – Attachment | | | |
|--------------------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| ATTACHMENT TO TEST REPORT | | |
|--|--|-----|
| IEC 62368-1 | | |
| EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES | | |
| (AUDIO/VIDEO, INFORMATION AND COMMUNICATION TECHNOLOGY EQUIPMENT - PART 1: SAFETY REQUIREMENTS) | | |
| Differences according to : EN IEC 62368-1:2020+A11:2020 | | |
| Attachment Form No. : EU_GD_IEC62368_1E | | |
| Attachment Originator : UL(Demko) | | |
| Master Attachment : 2021-02-04 | | |
| Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved. | | |
| | CENELEC COMMON MODIFICATIONS (EN) | P |
| | Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2020+A11:2020. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2018. Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2018 are prefixed "Z". | P |
| | Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZC (informative) A-deviations Annex ZD (informative) IEC and CENELEC code designations for flexible cords | P |
| 1 | Modification to Clause 3 . | N/A |
| 3.3.19 | Sound exposure <i>Replace 3.3.19 of IEC 62368-1 with the following definitions:</i> | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 3.3.19.1 | <p>momentary exposure level, MEL</p> <p>metric for estimating 1 s sound exposure level from the HD 483-1 S2 test signal applied to both channels, based on EN 50332-1:2013, 4.2.</p> <p>Note 1 to entry: MEL is measured as A-weighted levels in dB.</p> <p>Note 2 to entry: See B.3 of EN 50332-3:2017 for additional information.</p> | | N/A |
| 3.3.19.3 | <p>sound exposure, E</p> <p>A-weighted sound pressure (p) squared and integrated over a stated period of time, T</p> <p>Note 1 to entry: The SI unit is Pa² s.</p> $E = \int_0^T p(t)^2 dt$ | | N/A |
| 3.3.19.4 | <p>sound exposure level, SEL</p> <p>logarithmic measure of sound exposure relative to a reference value, E_0, typically the 1 kHz threshold of hearing in humans.</p> <p>Note 1 to entry: SEL is measured as A-weighted levels in dB.</p> $SEL = 10 \lg \left(\frac{E}{E_0} \right) \text{ dB}$ <p>Note 2 to entry: See B.4 of EN 50332-3:2017 for additional information.</p> | | N/A |
| 3.3.19.5 | <p>digital signal level relative to full scale, dBFS</p> <p>levels reported in dBFS are always r.m.s. Full scale level, 0 dBFS, is the level of a dc-free 997-Hz sine wave whose undithered positive peak value is positive digital full scale, leaving the code corresponding to negative digital full scale unused</p> <p>Note 1 to entry: It is invalid to use dBFS for non-r.m.s. levels. Because the definition of full scale is based on a sine wave, the level of signals with a crest factor lower than that of a sine wave may exceed 0 dBFS. In particular, square wave signals may reach +3,01 dBFS.</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 2 | Modification to Clause 10 | | N/A |
| 10.6 | Safeguards against acoustic energy sources Replace 10.6 of IEC 62368-1 with the following: | | N/A |
| 10.6.1.1 | <p>Introduction</p> <p>Safeguard requirements for protection against long-term exposure to excessive sound pressure levels from personal music players closely coupled to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an ordinary person, that:</p> <ul style="list-style-type: none"> – is designed to allow the user to listen to audio or audiovisual content / material; and – uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and – has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). <p>EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment.</p> <p>Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3.</p> <p>NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360.</p> <p>NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.</p> <p>Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to: – professional equipment;</p> <p>NOTE 3 Professional equipment is equipment sold</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</p> <p>– hearing aid equipment and other devices for assistive listening; – the following type of analogue personal music players:</p> <ul style="list-style-type: none"> • long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and • cassette player/recorder; <p>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</p> <p>– a player while connected to an external amplifier that does not allow the user to walk around while in use.</p> <p>For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply.</p> <p>The relevant requirements are given in EN 71-1:2011, 4.20 and the related tests methods and measurement distances apply.</p> | | |
| 10.6.1.2 | <p>Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz</p> <p>The amount of non-ionizing radiation is regulated by European Council Recommendation 1999/519/EC of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz). For intentional radiators, ICNIRP guidelines should be taken into account for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz). For hand-held and body mounted devices, attention is drawn to EN 50360 and EN 50566.</p> | | N/A |
| 10.6.2 | <p>Classification of devices without the capacity to estimate sound dose</p> | | N/A |
| 10.6.2.1 | <p>General</p> <p>This standard is transitioning from short-term based (30 s) requirements to long-term based (40</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>hour) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3.</p> <p>For classifying the acoustic output $L_{Aeq,T}$, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period.</p> <p>For music where the average sound pressure (long term $L_{Aeq,T}$) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, T becomes the duration of the song.</p> <p>NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term $L_{Aeq,T}$) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit.</p> <p>For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.</p> | | |
| 10.6.2.2 | <p>RS1 limits (to be superseded, see 10.6.3.2)</p> <p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq,T}$ acoustic output shall be ≤ 85 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or -25 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1. – The RS1 limits will be updated for all devices as | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | per 10.6.3.2. | | |
| 10.6.2.3 | <p>RS2 limits (to be superseded, see 10.6.3.3)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic 130 detection, the $L_{Aeq, T}$ acoustic output shall be ≤ 100 dB(A) when playing the fixed “programme simulation noise” as described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or -10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1. | | N/A |
| 10.6.2.4 | <p>RS3 limits</p> <p>RS3 is a class 3 acoustic energy source that exceeds RS2 limits.</p> | | N/A |
| 10.6.3 | Classification of devices (new) | | |
| 10.6.3.1 | <p>General</p> <p>Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision of 23 June 2009, are given below.</p> | | N/A |
| 10.6.3.2 | <p>RS1 limits (new)</p> <p>RS1 is a class 1 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the $L_{Aeq, T}$ acoustic output shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital | | N/A |






| EN 62368_1E – Attachment | | | |
|--------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | interface) when playing the fixed “programme simulation noise” described in EN 50332-1. | | |
| 10.6.3.3 | <p>RS2 limits (new)</p> <p>RS2 is a class 2 acoustic energy source that does not exceed the following:</p> <ul style="list-style-type: none"> – for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3, shall be ≤ 80 dB when playing the fixed "programme simulation noise" described in EN 50332-1. – for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN50332-3, shall be ≤ 15 mV (analogue interface) or -30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1. | | N/A |
| 10.6.4 | Requirements for maximum sound exposure | | N/A |
| 10.6.4.1 | <p>Measurement methods</p> <p>All volume controls shall be turned to maximum during tests.</p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable.</p> | | N/A |
| 10.6.4.2 | <p>Protection of persons</p> <p>Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3.</p> <p>NOTE 1 Volume control is not considered a safeguard.</p> <p>Between RS2 and an ordinary person, the basic safeguard may be replaced by an instructional safeguard in accordance with Clause F.5, except that the instructional safeguard shall be placed on the equipment, or on the packaging, or in the instruction manual.</p> <p>Alternatively, the instructional safeguard may be given through the equipment display during use.</p> <p>The elements of the instructional safeguard shall be as follows:</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>– element 1a: the symbol , IEC 60417-6044 (2011-01)</p> <p>– element 2: “High sound pressure” or equivalent wording</p> <p>– element 3: “Hearing damage risk” or equivalent wording</p> <p>– element 4: “Do not listen at high volume levels for long periods.” or equivalent wording</p> <p>An equipment safeguard shall prevent exposure of an ordinary person to an RS2 source without intentional physical action from the ordinary person and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off.</p> <p>The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output exceeding RS1. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output exceeding RS1. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.</p> <p>NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed.</p> <p>NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off.</p> <p>A skilled person shall not be unintentionally exposed to RS3.</p> | | |
| 10.6.5 | Requirements for dose-based systems | | N/A |
| 10.6.5.1 | <p>General requirements</p> <p>Personal music players shall give the warnings as provided below when tested according to EN 50332-3, using the limits from this clause.</p> <p>The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration.</p> <p>The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.</p> | | |
| 10.6.5.2 | <p>Dose-based warning and requirements</p> <p>When a dose of 100 % CSD is reached, and at least at every 100 % further increase of CSD, the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to compliance with class RS1.</p> <p>The warning shall at least clearly indicate that listening above 100 % CSD leads to the risk of hearing damage or loss.</p> | | N/A |
| 10.6.5.3 | <p>Exposure-based requirements</p> <p>With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at.</p> <p>The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3.</p> <p>The EL settling time (time from starting level reduction to reaching target output) shall be 10 s or faster.</p> <p>Test of EL functionality is conducted according to EN 50332-3, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the unweighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than -10 dBFS for a digital interface.</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | NOTE In case the source is known not to be music (or test signal), the EL may be disabled. | | |
| 10.6.6 | Requirements for listening devices (headphones, earphones, etc.) | | N/A |
| 10.6.6.1 | <p>Corded listening devices with analogue input</p> <p>With 94 dB LAeq acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the input voltage of the listening device when playing the fixed “programme simulation noise” as described in EN 50332-1 shall be ≥ 75 mV.</p> <p>NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV or 100 dB and 150 mV.</p> | | N/A |
| 10.6.6.2 | <p>Corded listening devices with digital input</p> <p>With any playing device playing the fixed “programme simulation noise” described in EN 50332-1, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the LAeq,T acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.</p> | | N/A |
| 10.6.6.3 | <p>Cordless listening devices</p> <p>In cordless mode, – with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and – respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and – with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the LAeq,T acoustic output of the listening device shall be ≤ 100 dB with an input signal of -10 dBFS.</p> | | N/A |
| 10.6.6.4 | <p>Measurement method</p> <p><i>Measurements shall be made in accordance with</i></p> | | N/A |





EN 62368_1E – Attachment

| Clause | Requirement + Test | Result - Remark | Verdict | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------------------|--|-------------------------|-----------------------|--------------|-----------------------|--------------|---------|--------|---------|--------|--------|------|-------|--------------|---------|------|-------------------------|--------|-------------|--------------|-------------------------|--------|---------|--------|---------|------|------------|------|------------|------|------------|------|---------|------|-------|------|-----------|-----------------------|-------|--------|-------|------|---------|----------------------|-----------|------|--------------------|-----------------------|--------|--------|--------|--------|---------|--------|-------|------|-------|------|--|--|--|--|---|
| | <i>EN 50332-2 as applicable.</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Modification to the whole document | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <p>Delete all the “country” notes in the reference document according to the following list:</p> <table border="1"> <tr> <td>0.2.1</td> <td>Note 1 and 2</td> <td>1</td> <td>Note 4 and 5</td> <td>3.3.8.1</td> <td>Note 2</td> </tr> <tr> <td>3.3.8.3</td> <td>Note 1</td> <td>4.1.15</td> <td>Note</td> <td>4.7.3</td> <td>Note 1 and 2</td> </tr> <tr> <td>5.2.2.2</td> <td>Note</td> <td>5.4.2.3.2.2 Table 12</td> <td>Note c</td> <td>5.4.2.3.2.4</td> <td>Note 1 and 3</td> </tr> <tr> <td>5.4.2.3.2.4 Table 13</td> <td>Note 2</td> <td>5.4.2.5</td> <td>Note 2</td> <td>5.4.5.1</td> <td>Note</td> </tr> <tr> <td>5.4.10.2.1</td> <td>Note</td> <td>5.4.10.2.2</td> <td>Note</td> <td>5.4.10.2.3</td> <td>Note</td> </tr> <tr> <td>5.5.2.1</td> <td>Note</td> <td>5.5.6</td> <td>Note</td> <td>5.6.4.2.1</td> <td>Note 2 and 3 and 4</td> </tr> <tr> <td>5.6.8</td> <td>Note 2</td> <td>5.7.6</td> <td>Note</td> <td>5.7.7.1</td> <td>Note 1 and Note 2</td> </tr> <tr> <td>8.5.4.2.3</td> <td>Note</td> <td>10.2.1 Table 39</td> <td>Note 3 and 4 and 5</td> <td>10.5.3</td> <td>Note 2</td> </tr> <tr> <td>10.6.1</td> <td>Note 3</td> <td>F.3.3.6</td> <td>Note 3</td> <td>Y.4.1</td> <td>Note</td> </tr> <tr> <td>Y.4.5</td> <td>Note</td> <td></td> <td></td> <td></td> <td></td> </tr> </table> | | 0.2.1 | Note 1 and 2 | 1 | Note 4 and 5 | 3.3.8.1 | Note 2 | 3.3.8.3 | Note 1 | 4.1.15 | Note | 4.7.3 | Note 1 and 2 | 5.2.2.2 | Note | 5.4.2.3.2.2 Table 12 | Note c | 5.4.2.3.2.4 | Note 1 and 3 | 5.4.2.3.2.4 Table 13 | Note 2 | 5.4.2.5 | Note 2 | 5.4.5.1 | Note | 5.4.10.2.1 | Note | 5.4.10.2.2 | Note | 5.4.10.2.3 | Note | 5.5.2.1 | Note | 5.5.6 | Note | 5.6.4.2.1 | Note 2 and 3 and 4 | 5.6.8 | Note 2 | 5.7.6 | Note | 5.7.7.1 | Note 1 and Note 2 | 8.5.4.2.3 | Note | 10.2.1 Table 39 | Note 3 and 4 and 5 | 10.5.3 | Note 2 | 10.6.1 | Note 3 | F.3.3.6 | Note 3 | Y.4.1 | Note | Y.4.5 | Note | | | | | P |
| 0.2.1 | Note 1 and 2 | 1 | Note 4 and 5 | 3.3.8.1 | Note 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.3.8.3 | Note 1 | 4.1.15 | Note | 4.7.3 | Note 1 and 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.2.2.2 | Note | 5.4.2.3.2.2 Table 12 | Note c | 5.4.2.3.2.4 | Note 1 and 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.4.2.3.2.4 Table 13 | Note 2 | 5.4.2.5 | Note 2 | 5.4.5.1 | Note | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.4.10.2.1 | Note | 5.4.10.2.2 | Note | 5.4.10.2.3 | Note | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.5.2.1 | Note | 5.5.6 | Note | 5.6.4.2.1 | Note 2 and 3 and 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.6.8 | Note 2 | 5.7.6 | Note | 5.7.7.1 | Note 1 and Note 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.5.4.2.3 | Note | 10.2.1 Table 39 | Note 3 and 4 and 5 | 10.5.3 | Note 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10.6.1 | Note 3 | F.3.3.6 | Note 3 | Y.4.1 | Note | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Y.4.5 | Note | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Modification to Clause 1 | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | <p>Add the following note:</p> <p><i>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU.</i></p> | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5 | Modification to 4.Z1 | | N/A |
| 4.Z1 | <p>Add the following new subclause after 4.9:</p> <p>To protect against excessive current, short-circuits and earth faults in circuits connected to an a.c. mains, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of B.3.1 and B.4 shall be included as parts of the equipment;</p> <p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for pluggable equipment type B or permanently connected equipment, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for pluggable equipment type A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p> | | N/A |
| 6 | Modification to 5.4.2.3.2.4 | | N/A |
| 5.4.2.3.2.4 | <p>Add the following to the end of this subclause:</p> <p>The requirement for interconnection with external circuit is in addition given in EN 50491-3:2009.</p> | | N/A |
| 7 | Modification to 10.2.1 | | N/A |
| 10.2.1 | <p>Add the following to ^{c)} and ^{d)} in table 39:</p> <p>For additional requirements, see 10.5.1.</p> | | N/A |
| 8 | Modification to 10.5.1 | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 10.5.1 | <p>Add the following after the first paragraph:</p> <p>For RS 1 compliance is checked by measurement under the following conditions:</p> <p>In addition to the normal operating conditions, all controls adjustable from the outside by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made.</p> <p>NOTE Z1 Soldered joints and paint lockings are examples of adequate locking.</p> <p>The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm², at any point 10 cm from the outer surface of the apparatus.</p> <p>Moreover, the measurement shall be made under fault conditions causing an increase of the high voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made.</p> <p>For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level.</p> <p>NOTE Z2 These values appear in Directive 96/29/Euratom of 13 May 1996.</p> | | N/A |
| 9 | Modification to G.7.1 | | N/A |
| G.7.1 | <p>Add the following note:</p> <p>NOTE Z1 The harmonized code designations corresponding to the IEC cord types are given in Annex ZD.</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 10 | Modification to Bibliography | | N/A |
| | <p>Add the following notes for the standards indicated:</p> <p>IEC 80130-9 NOTE Harmonized as EN 60130-9. IEC 80269-2 NOTE Harmonized as HD 60269-2. IEC 80309-1 NOTE Harmonized as EN 60309-1. IEC 80364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 80601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 80664-5 NOTE Harmonized as EN 60664-5. IEC 81032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 81508-1 NOTE Harmonized as EN 61508-1. IEC 81558-2-1 NOTE Harmonized as EN 61558-2-1. IEC 81558-2-4 NOTE Harmonized as EN 61558-2-4. IEC 81558-2-6 NOTE Harmonized as EN 61558-2-6. IEC 81643-1 NOTE Harmonized as EN 61643-1. IEC 81643-21 NOTE Harmonized as EN 61643-21. IEC 81643-311 NOTE Harmonized as EN 61643-311. IEC 81643-321 NOTE Harmonized as EN 61643-321. IEC 81643-331 NOTE Harmonized as EN 61643-331.</p> | | N/A |
| 11 | ADDITION OF ANNEXES | | N/A |
| ZB | ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN) | | N/A |
| 4.1.15 | <p>Denmark, Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet.</p> <p>The marking text in the applicable countries shall be as follows: In Denmark: "Apparatets stikprop skal tilsluttes en stikkontakt med jord som giver forbindelse til stikproppens jord." In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt" In Sweden: "Apparaten skall anslutas till jordat uttag"</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 4.7.3 | <p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex</p> | | N/A |
| 5.2.2.2 | <p>Denmark</p> <p>After the 2nd paragraph add the following:</p> <p>A warning (marking safeguard) for high touch current is required if the touch current exceeds the limits of 3,5 mA a.c. or 10 mA d.c.</p> | | N/A |
| 5.4.11.1 and Annex G | <p>Finland and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>For separation of the telecommunication network from earth the following is applicable:</p> <p>If this insulation is solid, including insulation forming part of a component, it shall at least consist of either</p> <ul style="list-style-type: none"> • two layers of thin sheet material, each of which shall pass the electric strength test below, or • one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. <p>If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition</p> <ul style="list-style-type: none"> • passes the tests and inspection criteria of 5.4.8 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), <p>and</p> <ul style="list-style-type: none"> • is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. <p>It is permitted to bridge this insulation with a</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.11; the additional testing shall be performed on all the test specimens as described in EN 60384-14; <p>the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</p> | | |
| 5.5.2.1 | <p>Norway</p> <p>After the 3rd paragraph the following is added:</p> <p>Due to the IT power system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).</p> | | N/A |
| 5.5.6 | <p>Finland, Norway and Sweden</p> <p>To the end of the subclause the following is added:</p> <p>Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.2.</p> | | N/A |
| 5.6.1 | <p>Denmark</p> <p>Add to the end of the subclause Due to many existing installations where the socket-outlets can be protected with fuses with higher rating than the rating of the socket-outlets the protection for pluggable equipment type A shall be an integral part of the equipment. <i>Justification:</i> In Denmark an existing 13 A socket outlet can be protected by a 20 A fuse.</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5.6.4.2.1 | Ireland and United Kingdom After the indent for pluggable equipment type A , the following is added: – the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug. | | N/A |
| 5.6.4.2.1 | France After the indent for pluggable equipment type A , the following is added: – in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A. | | N/A |
| 5.6.5.1 | To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm ² to 1,5 mm ² in cross-sectional area. | | N/A |
| 5.6.8 | Norway To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as class I equipment . See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted. | | N/A |
| 5.7.6 | Denmark To the end of the subclause the following is added: The installation instruction shall be affixed to the equipment if the protective conductor current exceeds the limits of 3,5 mA a.c. or 10 mA d.c. | | N/A |
| 5.7.6.2 | Denmark To the end of the subclause the following is added: The warning (marking safeguard) for high touch current is required if the touch current or the protective current exceed the limits of 3,5 mA . | | N/A |
| 5.7.7.1 | Norway and Sweden To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system. | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example.</p> <p>The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:</p> <p>“Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)”</p> <p>NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”</p> <p>Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”</p> | | |





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 8.5.4.2.3 | <p>United Kingdom</p> <p>Add the following after the 2nd dash bullet in 3rd paragraph:</p> <p>An emergency stop system complying with the requirements of IEC 60204-1 and ISO 13850 is required where there is a risk of personal injury.</p> | | N/A |
| B.3.1 and B.4 | <p>Ireland and United Kingdom</p> <p>The following is applicable:</p> <p>To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met</p> | | N/A |

| | | | |
|-------|--|--|-----|
| G.4.2 | <p>Denmark</p> <p>To the end of the subclause the following is added:</p> <p>Supply cords of single phase appliances having a rated current not exceeding 13 A shall be provided with a plug according to DS 60884-2-D1:2011.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If a single-phase equipment having a RATED CURRENT exceeding 13 A or if a polyphase equipment is provided with a supply cord with a plug, this plug shall be in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.</p> <p>Mains socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance DS 60884-2-D1:2011 standard sheet DKA 1-4a.</p> <p>Other current rating socket outlets shall be in compliance with Standard Sheet DKA 1-3a</p> | | N/A |
|-------|--|--|-----|





| EN 62368_1E – Attachment | | | |
|--------------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | <p>or DKA 1-1c.</p> <p>Mains socket-outlets with earth shall be in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a</p> <p><i>Justification:</i> Heavy Current Regulations, Section 6c</p> | | |
| G.4.2 | <p>United Kingdom</p> <p>To the end of the subclause the following is added:</p> <p>The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.</p> | | N/A |
| G.7.1 | <p>United Kingdom</p> <p>To the first paragraph the following is added:</p> <p>Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations.</p> <p>NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p> | | N/A |
| G.7.1 | <p>Ireland</p> <p>To the first paragraph the following is added:</p> <p>Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard</p> | | N/A |





| EN 62368_1E – Attachment | | | |
|--------------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| G.7.2 | Ireland and United Kingdom To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm ² is allowed for equipment which is rated over 10 A and up to and including 13 A. | | N/A |
| ZC | ANNEX ZC, NATIONAL DEVIATIONS (EN) | | N/A |
| 10.5.2 | Germany The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking. <i>Justification:</i> German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM. NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49-531-592-6320, Internet: http://www.ptb.de | | N/A |





EN 62368_1E – Attachment


| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| ZD | IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS (EN) | | N/A | |
|---|---|-------------------|--------------------------|-----|
| | Type of flexible cord | Code designations | | N/A |
| | | IEC | CENELEC | |
| PVC insulated cords | | | | |
| | Flat twin tinsel cord | 60227 IEC 41 | H03VH-Y | |
| | Light polyvinyl chloride sheathed flexible cord | 60227 IEC 52 | H03VV-F H03VVH2-F | |
| | Ordinary polyvinyl chloride sheathed flexible cord | 60227 IEC 53 | H05VV-F H05VVH2-F | |
| Rubber insulated cords | | | | |
| | Braided cord | 60245 IEC 51 | H03RT-F | |
| | Ordinary tough rubber sheathed flexible cord | 60245 IEC 53 | H05RR-F | |
| | Ordinary polychloroprene sheathed flexible cord | 60245 IEC 57 | H05RN-F | |
| | Heavy polychloroprene sheathed flexible cord | 60245 IEC 66 | H07RN-F | |
| Cords having high flexibility | | | | |
| | Rubber insulated and sheathed cord | 60245 IEC 86 | H03RR-H | |
| | Rubber insulated, crosslinked PVC sheathed cord | 60245 IEC 87 | H03RV4-H | |
| | Crosslinked PVC insulated and sheathed cord | 60245 IEC 88 | H03V4V4-H | |
| Cords insulated and sheathed with halogen-free thermoplastic compounds | | | | |
| | Light halogen-free thermoplastic insulated and sheathed flexible cords | | H03Z1Z1-F H03Z1Z1H2-F | |
| | Ordinary halogen-free thermoplastic insulated and sheathed flexible cords | | H05Z1Z1-F H05Z1Z1H2-F | |






Details of: Overall view

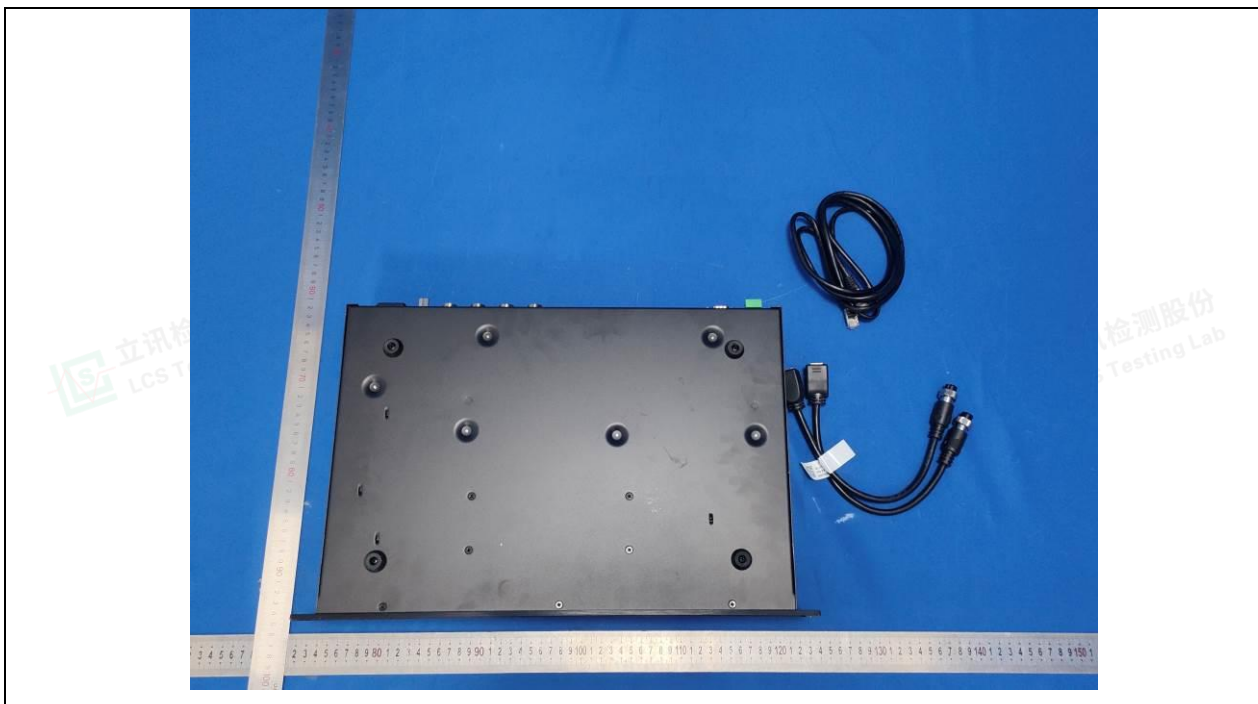

Details of: External view

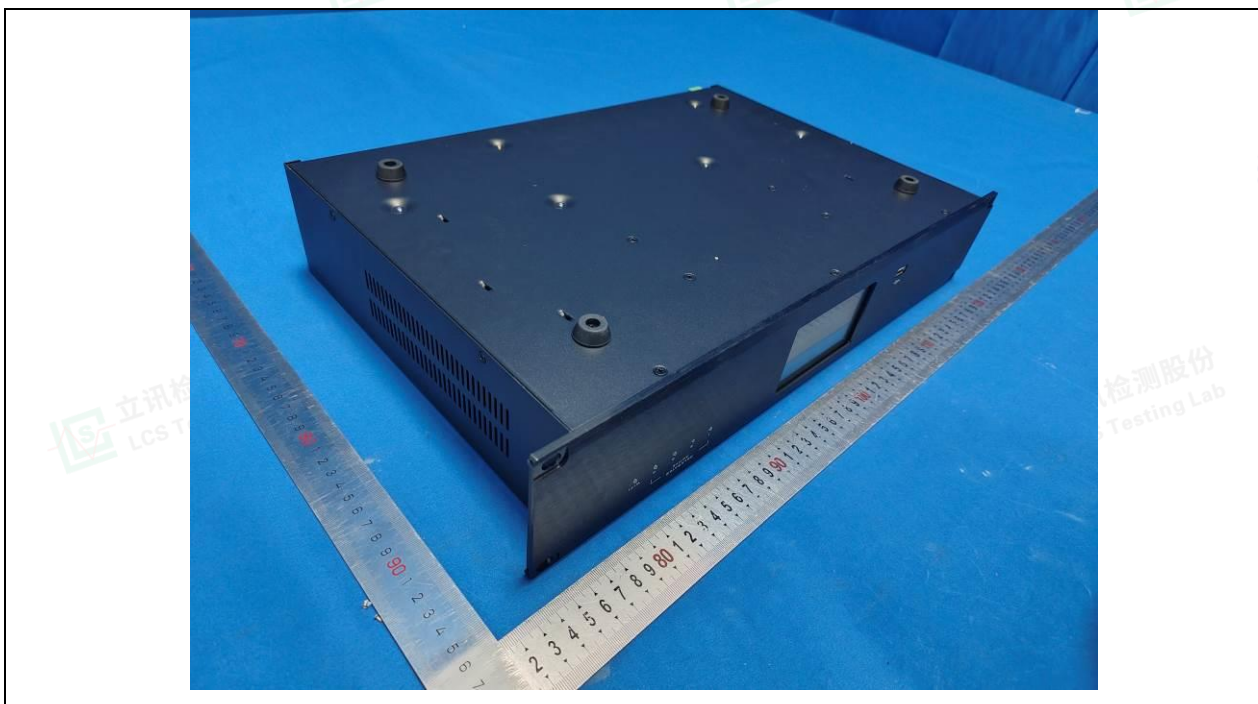



Details of: External view



Details of: External view






Details of: External view




Details of: Internal view

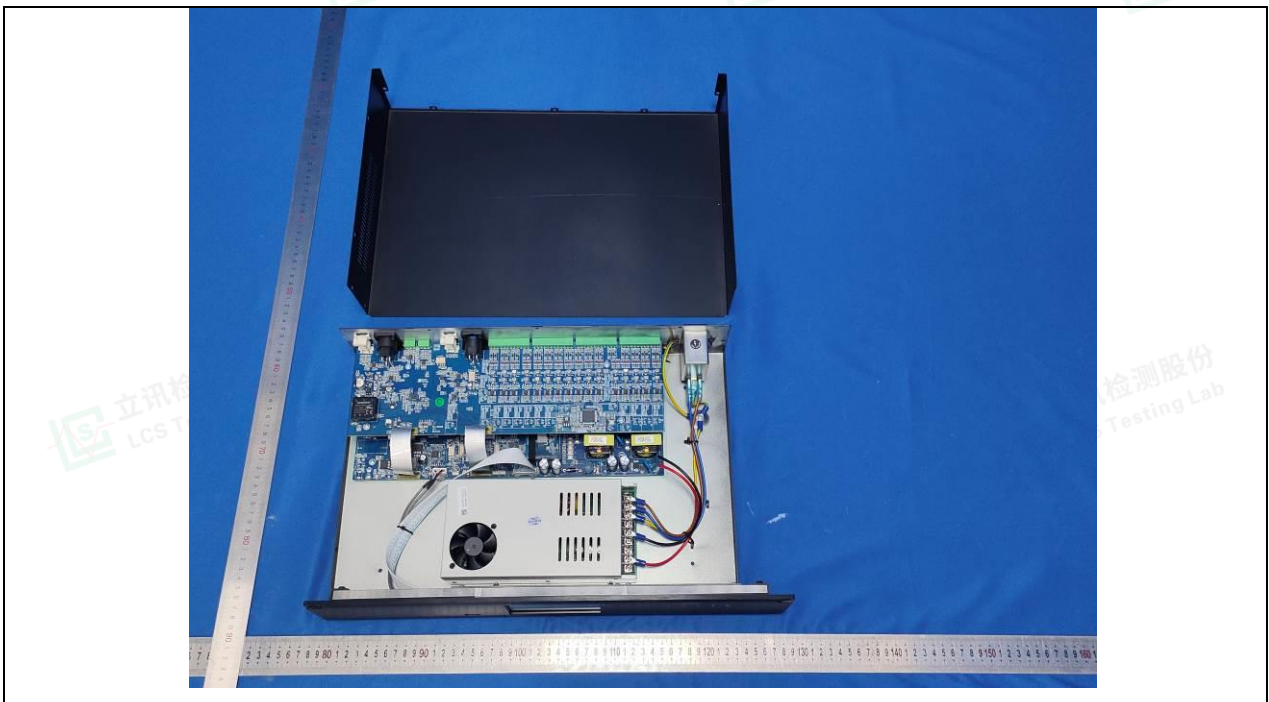




Details of: Internal view

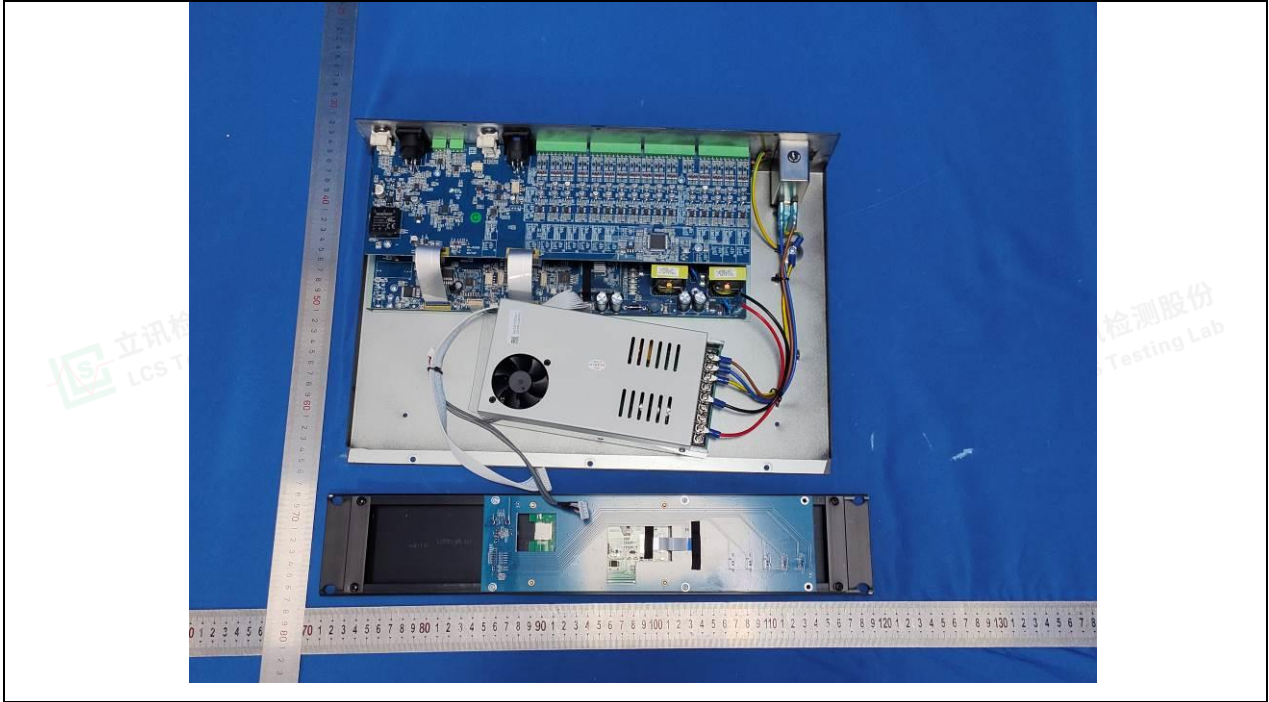


Details of: Internal view

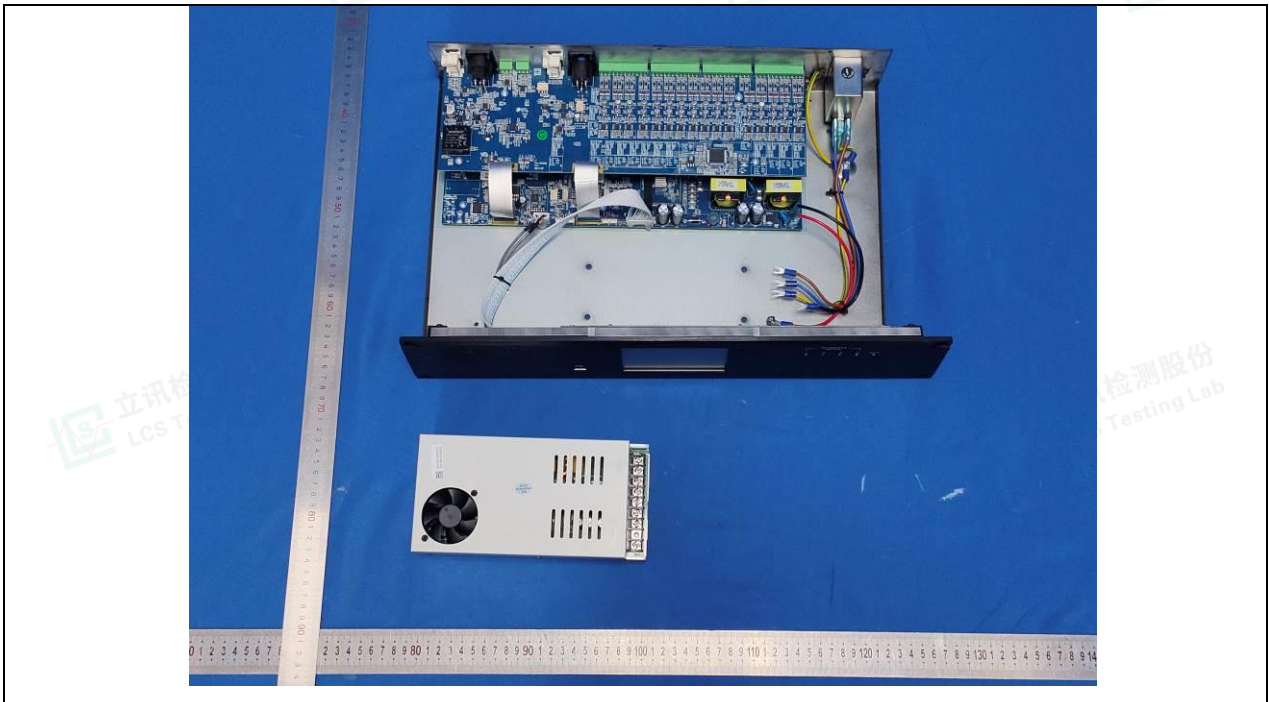



Details of: Internal view

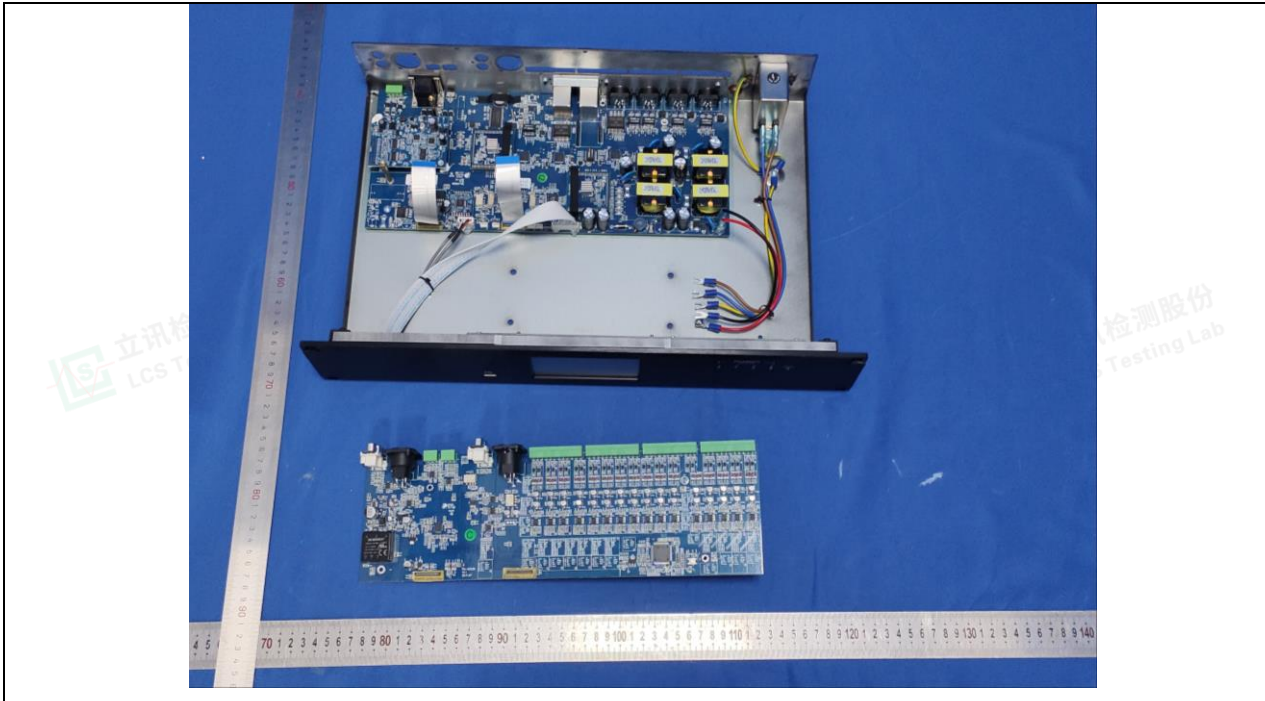


Details of: Power supply view






Details of: PCB view

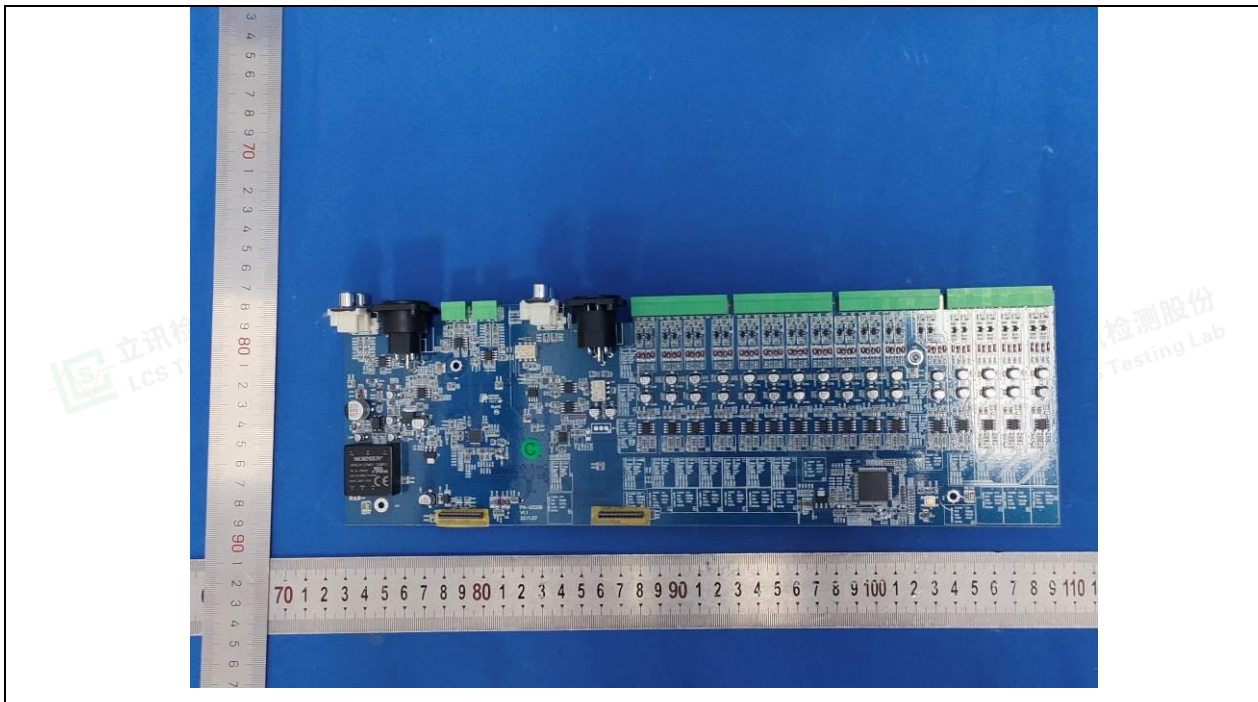


Details of: PCB view

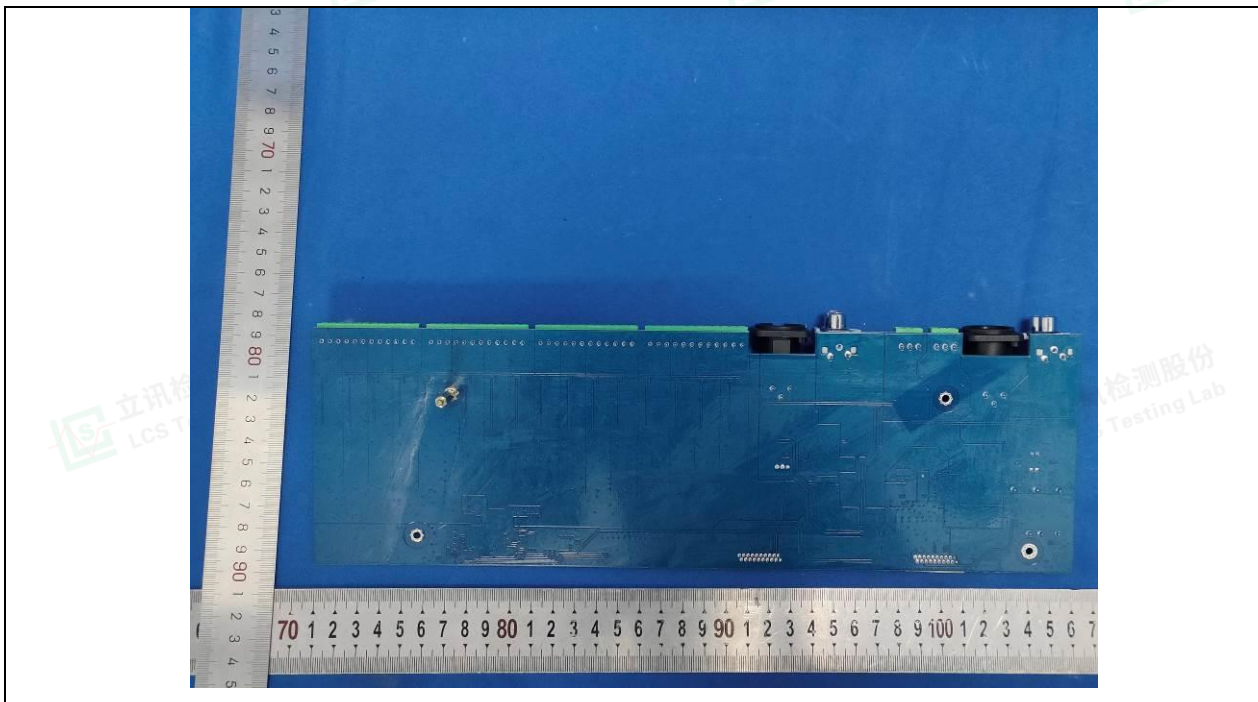




Details of: Internal view

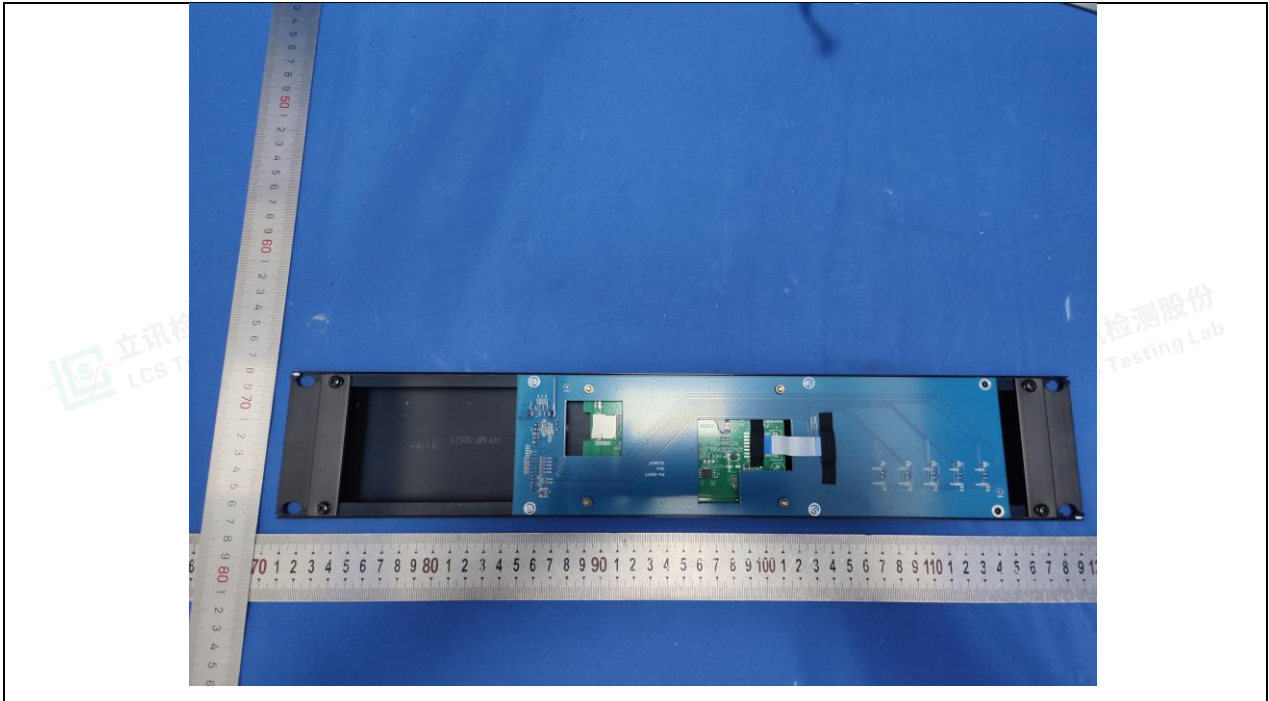


Details of: PCB view

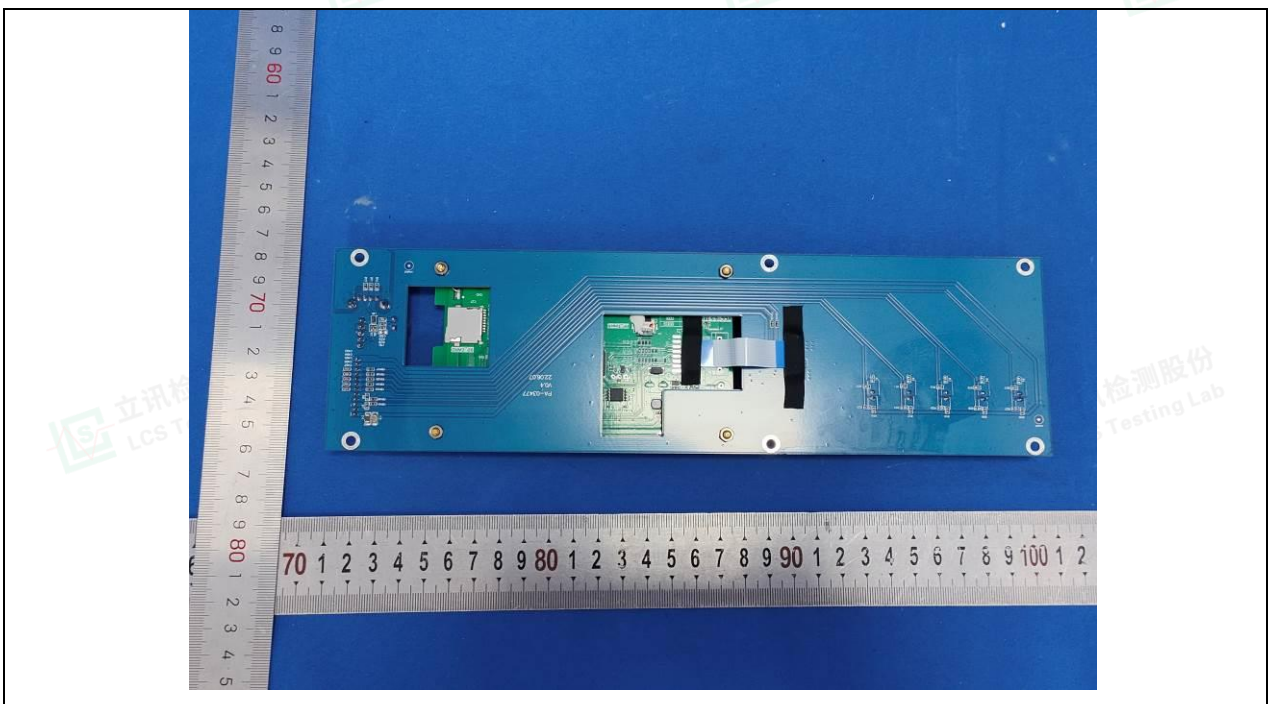




Details of: PCB view

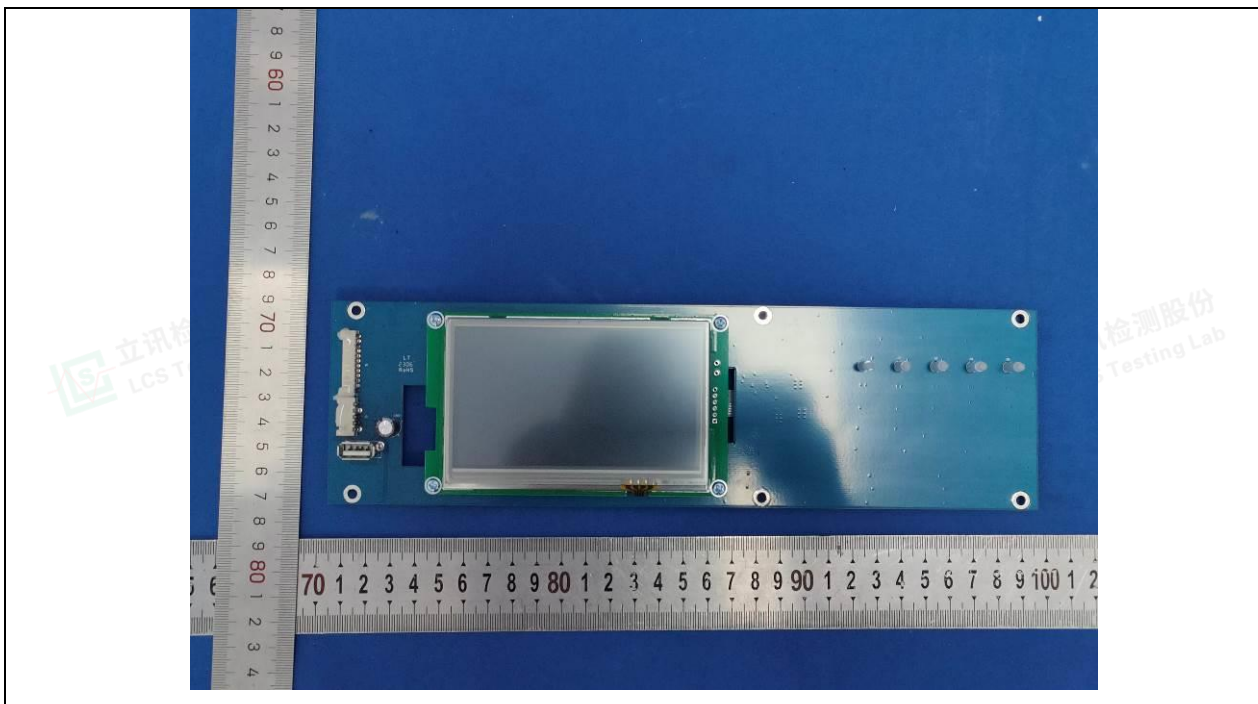


Details of: PCB view

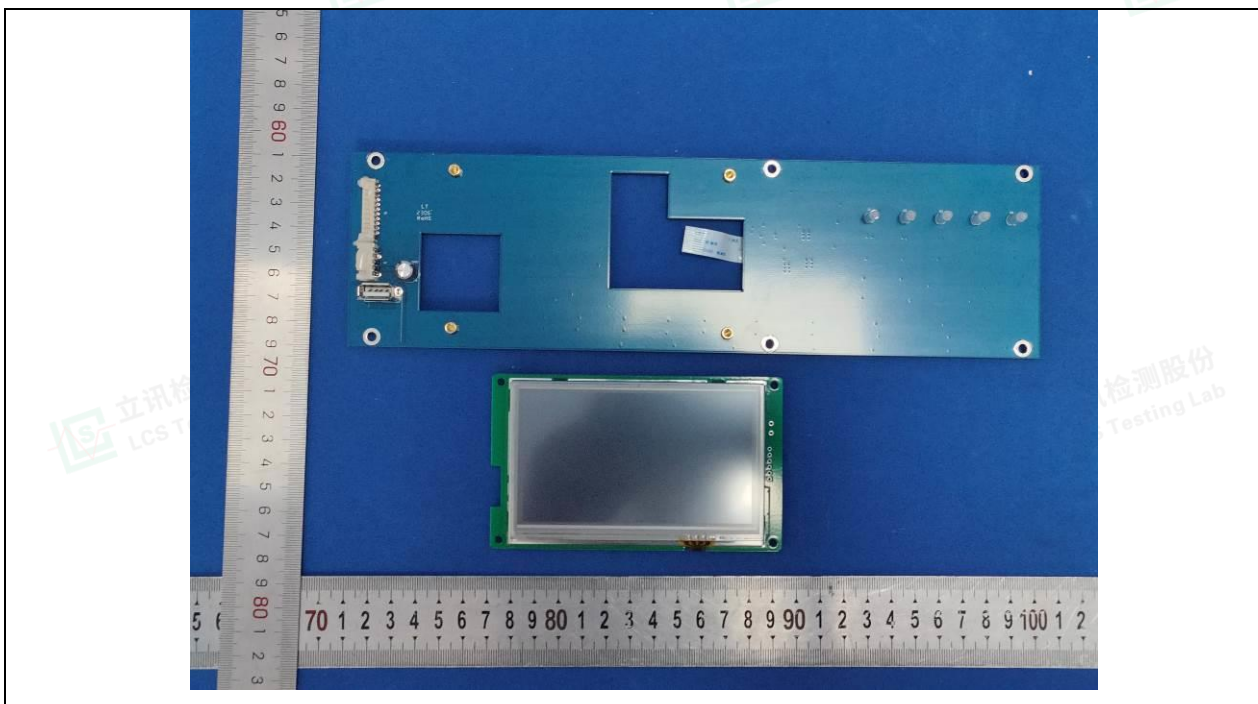




Details of: PCB view

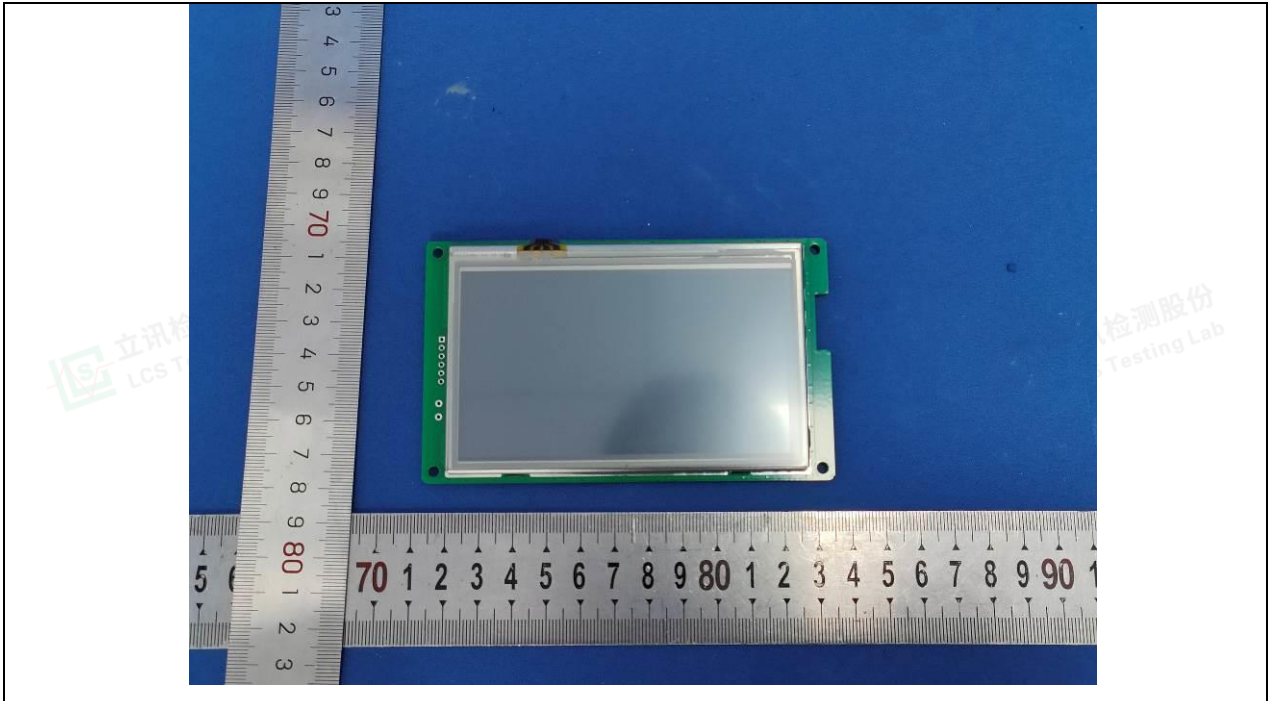

Details of: PCB view

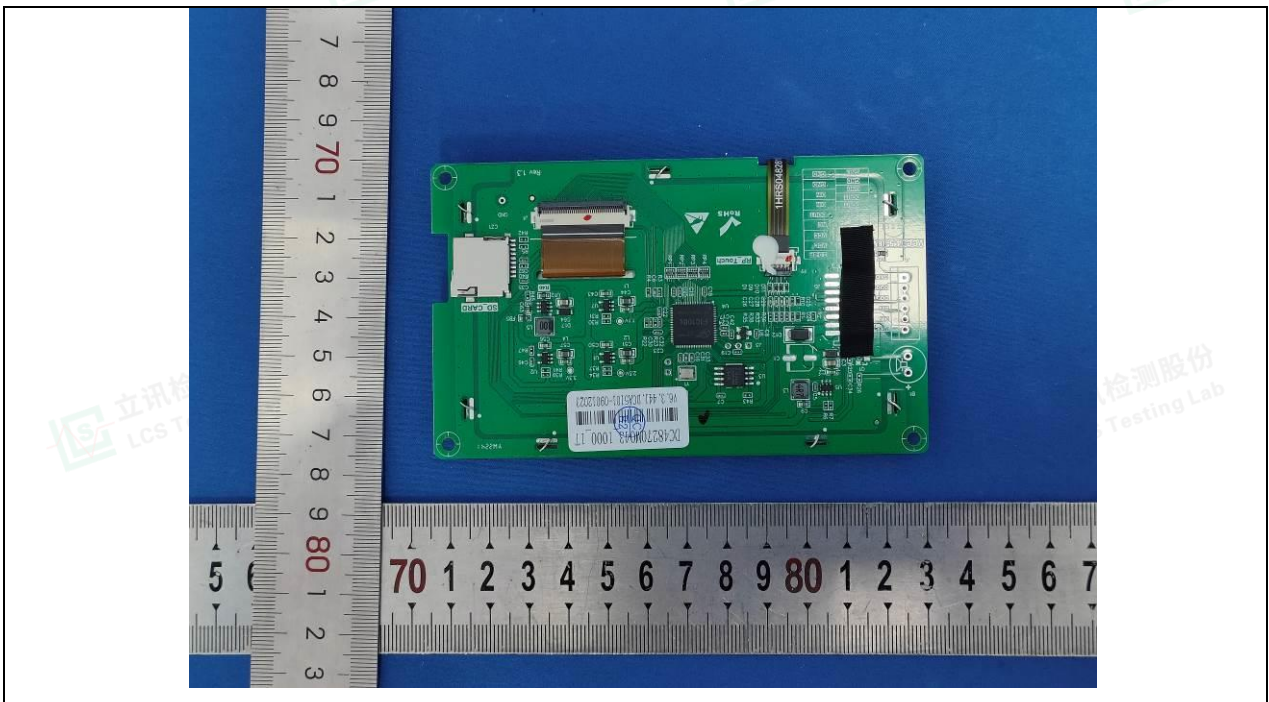



Details of: DC fan



Details of: Power cord view



---End of Test report---

