


### Descriptions

Wall mount or tabletop designs available. Mic1 input by 1/4" phone jack, Aux1 input by dual RCA, tel input by phoenix connector. Mic with Vox priority and telephone input with secondary input over all other inputs. 100V and 4-16 ohms speaker outputs. AC 120V or 230V to DC 12V power adapter to supply power. Mic1, Aux1 and tel volume control and bass/treble tone control. Wall mount bracket available.

### Specifications

Model	T-10AP
Rated Power Output	10W
Speaker Outputs	70V, 100V & 4~16Ω
Input Sensitivity & Impedance	MIC1, 2, 3: 5mV/600Ω, Unbalanced TRS input MIC1: ±2.5mV/2KΩ TEL: ±175mV/10KΩ AUX: 350mV/10KΩ, Unbalanced RCA input
Output Sensitivity & Impedance	LINE OUT: 1V/470Ω, Unbalanced RCA output
Overload Electromotive Force	MIC 1, 2, 3: >10dB MIC1: >15dB AUX: >15dB, Unbalanced RCA input TEL: >12dB
Tone	Bass: ±10dB, Treble: ±10dB
Frequency Response	50Hz~16KHz (+1dB, -3dB)
S/N Ratio	MIC: 66dB, AUX: 80dB
THD	Less than 0.3% at 1KHz, 1/3 rated power
Muting Function	MIC 1 overrides other input signals with 30dB attenuation
Crosstalk	≤50dB
Phantom Power	+48V
Cooling	Button-up convert automatic cool
Protection	High temp, overload & short-circuit
Power Supply	~110V/60Hz or ~230V/50Hz or DC 24V
Power Consumption	20W
Weight	1.2Kg
Dimensions	200x153x44mm
Finish	Panel: aluminum plate, black Case: steel plate, black

Rear Panel T-10AP

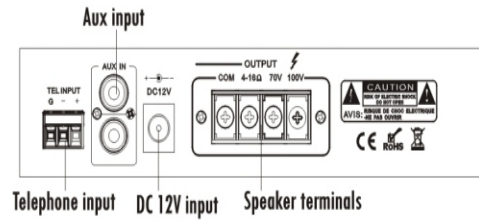

Connections

